## **SIEMENS**

Data sheet 3RB2066-1MC2



Overload relay 160...630 A for motor protection Size S10/S12, Class 10E Contactor mounting/stand-alone installation Main circuit: busbar connection Auxiliary circuit: Screw terminal Manual-Automatic-Reset

SIRIUS product brand name product designation solid-state overload relay product type designation 3RB2 General technical data size of overload relay S10, S12 size of contactor can be combined company-specific S10, S12 insulation voltage with degree of pollution 3 at AC rated 1 000 V value 8 kV surge voltage resistance rated value maximum permissible voltage for safe isolation in networks with grounded star point • between auxiliary and auxiliary circuit 300 V • between auxiliary and auxiliary circuit 300 V 600 V • between main and auxiliary circuit • between main and auxiliary circuit 690 V shock resistance 15g / 11 ms • according to IEC 60068-2-27 15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms vibration resistance 1-6 Hz, 15 mm; 6-500 Hz, 20 m/s2; 10 cycles thermal current type of protection according to ATEX directive Ex II (2) G [Ex e] [Ex d] [Ex px]; Ex II (2) D [Ex t] [Ex p] 2014/34/EU certificate of suitability according to ATEX directive PTB 06 ATEX 3001 2014/34/EU F reference code according to IEC 81346-2 **Substance Prohibitance (Date)** 07/01/2006 **Ambient conditions** installation altitude at height above sea level maximum 2 000 m ambient temperature -25 ... +60 °C during operation · during storage -40 ... +80 °C -40 ... +80 °C during transport temperature compensation -25 ... +60 °C relative humidity during operation 10 ... 95 % Main circuit number of poles for main current circuit 3 adjustable current response value current of the 160 ... 630 A current-dependent overload release operating voltage • rated value 1 000 V • at AC-3e rated value maximum 1 000 V 50 ... 60 Hz operating frequency rated value

operational current rated value

630 A

operational current at AC-3e at 400 V rated value	630 A
operating power	
<ul> <li>for 3-phase motors at 400 V at 50 Hz</li> </ul>	90 355 kW
<ul> <li>for AC motors at 500 V at 50 Hz</li> </ul>	132 400 kW
<ul> <li>for AC motors at 690 V at 50 Hz</li> </ul>	160 560 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
	1
number of NO contacts for auxiliary contacts	
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	4 A
● at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
● at 60 V	0.55 A
● at 110 V	0.3 A
● at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 10E
design of the overload release	electronic
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	630 A
at 600 V rated value	630 A
contact rating of auxiliary contacts according to UI	BhUU / R3UU
contact rating of auxiliary contacts according to UL	B600 / R300
Short-circuit protection	B600 / R300
Short-circuit protection design of the fuse link	B600 / R300
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit	
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required	gG: 800 A, Class L: 1600 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required	gG: 800 A, Class L: 1600 A gG: 630 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch	gG: 800 A, Class L: 1600 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required	gG: 800 A, Class L: 1600 A gG: 630 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid  — solid or stranded	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid  — solid or stranded  — finely stranded with core end processing	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid  — solid or stranded  — finely stranded with core end processing  • at AWG cables for auxiliary contacts	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid  — solid or stranded  — finely stranded with core end processing  • at AWG cables for auxiliary contacts tightening torque	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 2x (20 14)
design of the fuse link	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 2x (20 14)
Short-circuit protection  design of the fuse link  • for short-circuit protection of the main circuit  — with type of coordination 1 required  — with type of assignment 2 required  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for auxiliary contacts  — solid  — solid or stranded  — finely stranded with core end processing  • at AWG cables for auxiliary contacts tightening torque	gG: 800 A, Class L: 1600 A gG: 630 A fuse gG: 6 A  any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm  Yes  busbar connection screw-type terminals Top and bottom  1x (0.5 4 mm²), 2x (0.5 2.5 mm²) 1x (0,5 4 mm²), 2x (0,5 2,5 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²) 2x (20 14)

• for main contacts	M10
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
Safety related data	
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with box terminal/cover
Communication/ Protocol	
type of voltage supply via input/output link master	No
Electromagnetic compatibility	
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV (line to earth) corresponds to degree of severity 3
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV (line to line) corresponds to degree of severity 3
<ul> <li>due to high-frequency radiation according to IEC 61000-4-6</li> </ul>	10 V in frequency range 0.15 to 80 MHz, modulation 80 $\%$ AM with 1 kHz
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Display	
display version for switching status	Slide switch
Certificates/ approvals	

**@** 

**General Product Approval** 



Confirmation







**EMC** 

For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Special Test Certificate

Type Test Certificates/Test Report



Marine / Shipping

(S)



Miscellaneous

other

Confirmation

## Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2066-1MC2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2066-1MC2


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB2066-1MC2


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current <a href="https://support.industry.siemens.com/cs/ww/en/ps/3RB2066-1MC2/char">https://support.industry.siemens.com/cs/ww/en/ps/3RB2066-1MC2/char</a>

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2066-1MC2&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2066-1MC2&objecttype=14&gridview=view1</a>







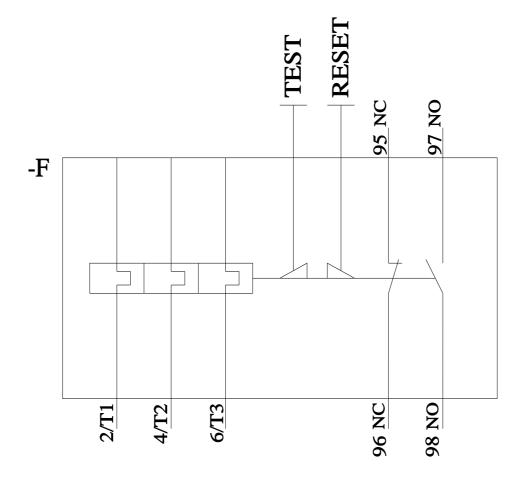

last modified: 2/9/2022 🖸