SIEMENS

Data sheet 3RB2163-4GC2



Overload relay 55...250 A for motor protection Size S10/S12, CLASS 5...30E Contactor mounting/stand-alone installation Main circuit: busbar connection Auxiliary circuit: Screw terminal Manual-Automatic-Reset Internal ground fault detection

product brand name	SIRIUS
product designation	solid-state overload relay
product type designation	3RB2
General technical data	
size of overload relay	S10, S12
size of contactor can be combined company-specific	S10, S12
insulation voltage with degree of pollution 3 at AC rated value	1 000 V
surge voltage resistance rated value	8 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
 between auxiliary and auxiliary circuit 	300 V
 between auxiliary and auxiliary circuit 	300 V
 between main and auxiliary circuit 	600 V
 between main and auxiliary circuit 	690 V
shock resistance	15g / 11 ms
according to IEC 60068-2-27	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
vibration resistance	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s ² ; 10 cycles
thermal current	250 A
type of protection according to ATEX directive 2014/34/EU	Ex II (2) G [Ex e] [Ex d] [Ex px]; Ex II (2) D [Ex t] [Ex p]
certificate of suitability according to ATEX directive 2014/34/EU	PTB 06 ATEX 3001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	07/01/2006
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-40 +80 °C
 during transport 	-40 +80 °C
temperature compensation	-25 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	55 250 A
operating voltage	
rated value	1 000 V
 for remote-reset function at DC 	24 V
 at AC-3e rated value maximum 	1 000 V
operating frequency rated value	50 60 Hz

operational current rated value	250 A
operational current at AC-3e at 400 V rated value	250 A
operating power	
• for 3-phase motors at 400 V at 50 Hz	30 132 kW
• for AC motors at 500 V at 50 Hz	45 160 kW
for AC motors at 690 V at 50 Hz	55 250 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	4.4
• at 24 V	4 A
• at 110 V	4 A
• at 120 V	4 A
• at 125 V	4 A
• at 230 V	3 A
operational current of auxiliary contacts at DC-13 ● at 24 V	2 A
• at 60 V	0.55 A
• at 110 V	0.3 A
• at 125 V	0.3 A
• at 220 V	0.11 A
Protective and monitoring functions	
trip class	CLASS 5E, 10E, 20E and 30E adjustable
design of the overload release	electronic
response value current of the grounding protection	0.75 x IMotor
minimum	0.7 0 X IIVIOLOI
response time of the grounding protection in settled state	1 000 ms
31416	
operating range of the grounding protection relating	
operating range of the grounding protection relating to current set value • minimum	IMotor > lower current setting value
operating range of the grounding protection relating to current set value • minimum • maximum	IMotor > lower current setting value IMotor < upper current setting value x 3.5
operating range of the grounding protection relating to current set value • minimum	
operating range of the grounding protection relating to current set value • minimum • maximum	
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings	
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	IMotor < upper current setting value x 3.5 250 A 250 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value	IMotor < upper current setting value x 3.5 250 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	IMotor < upper current setting value x 3.5 250 A 250 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link	IMotor < upper current setting value x 3.5 250 A 250 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	IMotor < upper current setting value x 3.5 250 A 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required	250 A 250 A 260 / R300 gG: 500 A, Class L: 700 A gG: 500 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required	IMotor < upper current setting value x 3.5 250 A 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch	250 A 250 A 260 / R300 gG: 500 A, Class L: 700 A gG: 500 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	250 A 250 A 260 / R300 gG: 500 A, Class L: 700 A gG: 500 A
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit	IMotor < upper current setting value x 3.5 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection	IMotor < upper current setting value x 3.5 250 A 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	IMotor < upper current setting value x 3.5 250 A 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection
operating range of the grounding protection relating to current set value • minimum • maximum UL/CSA ratings full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value contact rating of auxiliary contacts according to UL Short-circuit protection design of the fuse link • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions mounting position fastening method height width depth Connections/ Terminals product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit • for auxiliary and control circuit	IMotor < upper current setting value x 3.5 250 A 250 A 250 A B600 / R300 gG: 500 A, Class L: 700 A gG: 500 A fuse gG: 6 A any Contactor mounting/stand-alone installation 119 mm 120 mm 155 mm Yes busbar connection screw-type terminals

 for auxiliary contacts 			
— solid	1x (0.5 4 mm²), 2x (0.5 2.5 mm²)		
— solid or stranded	1x (0,5 4 mm²), 2x (0,5 2,5 mm²)		
 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1.5 mm²)		
 at AWG cables for auxiliary contacts 	2x (20 14)		
tightening torque			
 for main contacts with screw-type terminals 	20 22 N·m		
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m		
design of the thread of the connection screw			
 for main contacts 	M10		
 of the auxiliary and control contacts 	M3		
Safety related data			
protection class IP on the front according to IEC 60529	IP00; IP20 with box terminal/cover		
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front with b	ox terminal/cover	
Communication/ Protocol			
type of voltage supply via input/output link master	No		
type of voltage supply via input/output link master Electromagnetic compatibility	No		
<u> </u>	No		
Electromagnetic compatibility	No 2 kV (power ports), 1 kV (signal ports) corresponds 3	to degree of severity	
Electromagnetic compatibility conducted interference	2 kV (power ports), 1 kV (signal ports) corresponds		
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC	2 kV (power ports), 1 kV (signal ports) corresponds	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severi	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severit 1 kV (line to line) corresponds to degree of severity 10 V in frequency range 0.15 to 80 MHz, modulatio	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severi 1 kV (line to line) corresponds to degree of severity 10 V in frequency range 0.15 to 80 MHz, modulatio kHz	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 field-based interference according to IEC 61000-4-3	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severit 1 kV (line to line) corresponds to degree of severity 10 V in frequency range 0.15 to 80 MHz, modulatio kHz 10 V/m	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severit 1 kV (line to line) corresponds to degree of severity 10 V in frequency range 0.15 to 80 MHz, modulatio kHz 10 V/m	ty 3	
Electromagnetic compatibility conducted interference • due to burst according to IEC 61000-4-4 • due to conductor-earth surge according to IEC 61000-4-5 • due to conductor-conductor surge according to IEC 61000-4-5 • due to high-frequency radiation according to IEC 61000-4-6 field-based interference according to IEC 61000-4-3 electrostatic discharge according to IEC 61000-4-2 Display	2 kV (power ports), 1 kV (signal ports) corresponds 3 2 kV (line to earth) corresponds to degree of severity 1 kV (line to line) corresponds to degree of severity 10 V in frequency range 0.15 to 80 MHz, modulatio kHz 10 V/m 6 kV contact discharge / 8 kV air discharge	ty 3	





Confirmation







For use in hazardous locations

Declaration of Conformity

Test Certificates

Marine / Shipping







Type Test Certificates/Test Report

Special Test Certificate



Marine / Shipping

other







Miscellaneous

Confirmation

Further informatior

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2163-4GC2

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2163-4GC2

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RB2163-4GC2


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2163-4GC2&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RB2163-4GC2/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2163-4GC2&objecttype=14&gridview=view1







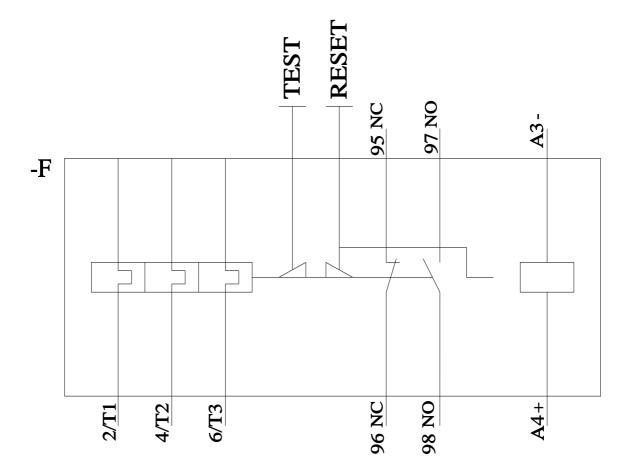

last modified: 2/9/2022 🖸