## **SIEMENS**

Data sheet 3RU2116-1FB0



Overload relay 3.5...5.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

| product brand name   | SIRIUS                 |
|--|------------------------|
| product designation  | thermal overload relay |
| product type designation   | 3RU2                   |
| General technical data   |                        |
| size of overload relay   | S00                    |
| size of contactor can be combined company-specific                                     | S00                    |
| power loss [W] for rated value of the current at AC in hot operating state             | 6.6 W                  |
| • per pole   | 2.2 W                  |
| insulation voltage with degree of pollution 3 at AC rated value                        | 690 V                  |
| surge voltage resistance rated value   | 6 kV                   |
| maximum permissible voltage for safe isolation in<br>networks with grounded star point |                        |
| <ul> <li>between auxiliary and auxiliary circuit</li> </ul>                            | 440 V                  |
| <ul> <li>between auxiliary and auxiliary circuit</li> </ul>                            | 440 V                  |
| <ul> <li>between main and auxiliary circuit</li> </ul>                                 | 440 V                  |
| <ul> <li>between main and auxiliary circuit</li> </ul>                                 | 440 V                  |
| shock resistance according to IEC 60068-2-27   | 8g / 11 ms             |
| type of protection according to ATEX directive 2014/34/EU                              | Ex II (2) GD           |
| certificate of suitability according to ATEX directive 2014/34/EU                      | DMT 98 ATEX G 001      |
| reference code according to IEC 81346-2  | F                      |
| Substance Prohibitance (Date)  | 10/01/2009             |
| Ambient conditions   |                        |
| installation altitude at height above sea level maximum                                | 2 000 m                |
| ambient temperature  |                        |
| <ul><li>during operation</li></ul>   | -40 +70 °C             |
| <ul><li>during storage</li></ul>   | -55 +80 °C             |
| <ul><li>during transport</li></ul>   | -55 +80 °C             |
| temperature compensation   | -40 +60 °C             |
| relative humidity during operation   | 10 95 %                |
| Main circuit   |                        |
| number of poles for main current circuit   | 3                      |
| adjustable current response value current of the<br>current-dependent overload release | 3.5 5 A                |
| operating voltage  |                        |
| rated value  | 690 V                  |
| <ul> <li>at AC-3e rated value maximum</li> </ul>                                       | 690 V                  |
| operating frequency rated value  | 50 60 Hz               |
| operational current rated value  | 5 A                    |
| operational current at AC-3e at 400 V rated value                                      | 5 A                    |

| operating power   |  |
|---|--|
|   |  |
| • at AC-3   | 4.5 1201   |
| — at 400 V rated value  | 1.5 kW   |
| — at 500 V rated value  | 2.2 kW   |
| <ul><li>— at 690 V rated value</li><li>● at AC-3e</li></ul>   | 4 kW   |
| — at 400 V rated value  | 1.5 kW   |
| — at 500 V rated value  | 2.2 kW   |
| — at 690 V rated value  | 4 kW   |
| Auxiliary circuit   | T KVV  |
|   | intermeted   |
| design of the auxiliary switch  | integrated   |
| number of NC contacts for auxiliary contacts  | 1 for contactor disconnection  |
| <ul> <li>note</li> <li>number of NO contacts for auxiliary contacts</li> </ul>  | 1  |
| • note  | for message "Tripped"  |
| number of CO contacts for auxiliary contacts  | 0  |
| operational current of auxiliary contacts at AC-15  |  |
| • at 24 V   | 3 A  |
| • at 110 V  | 3 A  |
| • at 120 V  | 3 A  |
| • at 125 V  | 3 A  |
| • at 230 V  | 2 A  |
| ● at 400 V  | 1 A  |
| • at 690 V  | 0.75 A   |
| operational current of auxiliary contacts at DC-13  |  |
| ● at 24 V   | 2 A  |
| ● at 60 V   | 0.3 A  |
| ● at 110 V  | 0.22 A   |
| • at 125 V  | 0.22 A   |
| ● at 220 V  | 0.11 A   |
| contact rating of auxiliary contacts according to UL  | B600 / R300  |
| Protective and monitoring functions   |  |
| trip class  | CLASS 10   |
| design of the overload release  | thermal  |
| UL/CSA ratings  |  |
| o Eroom ratings   |  |
| full-load current (FLA) for 3-phase AC motor  |  |
| -   | 5 A  |
| full-load current (FLA) for 3-phase AC motor  | 5 A<br>5 A   |
| full-load current (FLA) for 3-phase AC motor • at 480 V rated value   |  |
| full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value  |  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch   |  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  | 5 A  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  | 5 A  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position   | fuse gG: 6 A, quick: 10 A any  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method  | fuse gG: 6 A, quick: 10 A  any Contactor mounting  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary  | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit  | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals   |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection • for main current circuit  | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals   |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit  | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals   |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections   | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²                                     |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing                                     | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing  • at AWG cables for main contacts | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm²                                     |
| full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit type of connectable conductor cross-sections  • for main contacts  — solid or stranded  — finely stranded with core end processing                                     | fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²), 2x 4 mm² 2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²) |

- solid or stranded

- finely stranded with core end processing

• at AWG cables for auxiliary contacts

tightening torque

• for main contacts with screw-type terminals

• for auxiliary contacts with screw-type terminals

design of screwdriver shaft size of the screwdriver tip

design of the thread of the connection screw

· for main contacts

• of the auxiliary and control contacts

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²) 2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14)

0.8 ... 1.2 N·m 0.8 ... 1.2 N·m

Diameter 5 ... 6 mm

Pozidriv PZ 2

M3 M3

Safety related data

failure rate [FIT] with low demand rate according to SN 31920

MTTF with high demand rate

T1 value for proof test interval or service life according to

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529

50 FIT

2 280 a

20 a

IP20

finger-safe, for vertical contact from the front

Display

display version for switching status

Slide switch

Certificates/ approvals

## **General Product Approval**

For use in hazardous locations





Confirmation







For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping



IECEx





Special Test Certificate

Type Test Certificates/Test Report



## Marine / Shipping













other

Railway

**Confirmation** 

Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1FB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1FB0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1FB0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RU2116-1FB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1FB0/char

Further characteristics (e.g. electrical endurance, switching frequency)
<a href="http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1FB0&objecttype=14&gridview=view1">http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1FB0&objecttype=14&gridview=view1</a>

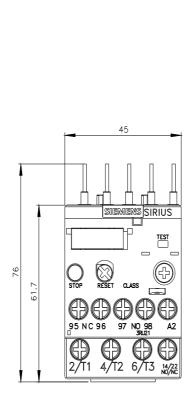

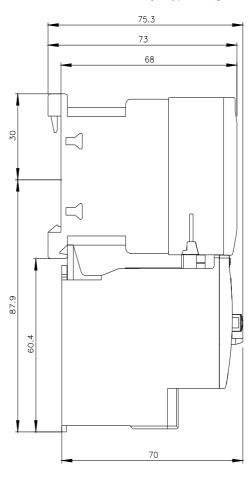

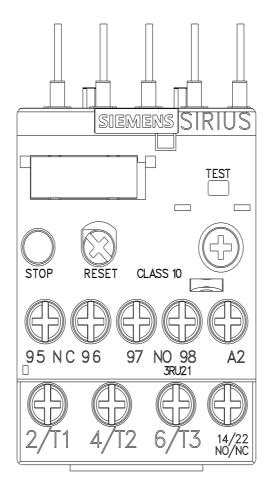

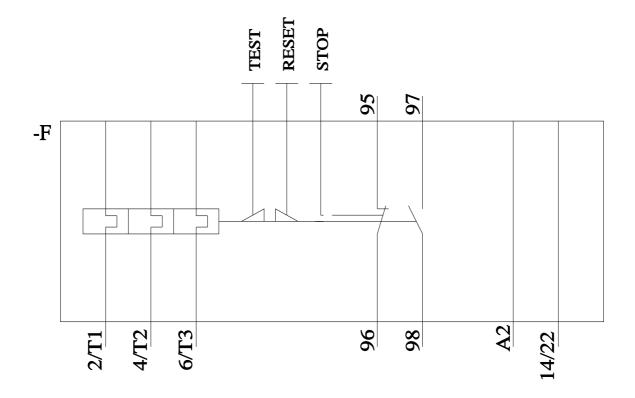

last modified: 3/8/2022 🖸