

Article No. : 6SL3210-1KE13-2UB2



Figure similar

Client order no. :  
Order no. :  
Offer no. :  
Remarks :

Item no. :  
Consignment no. :  
Project :

### Rated data

Input		
Number of phases	3 AC	
Line voltage	380 ... 480 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated current (LO)	4.10 A	
Rated current (HO)	3.20 A	
Output		
Number of phases	3 AC	
Rated voltage	400V IEC	480V NEC <sup>1)</sup>
Rated power (LO)	1.10 kW	1.50 hp
Rated power (HO)	0.75 kW	1.00 hp
Rated current (LO)	3.10 A	
Rated current (HO)	2.20 A	
Rated current (IN)	3.20 A	
Max. output current	4.40 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 240 Hz	
Output frequency for V/f control	0 ... 550 Hz	

### Overload capability

Low Overload (LO)
150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time
High Overload (HO)
200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a 300 s cycle time

### General tech. specifications

Power factor λ	0.70 ... 0.85
Offset factor cos φ	0.95
Efficiency η	0.97
Sound pressure level (1m)	49 dB
Power loss	48.1 W
Filter class (integrated)	Unfiltered

### Communication

Communication	USS/MODBUS RTU
---------------	----------------

### Inputs / outputs

Standard digital inputs	
Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA
Fail-safe digital inputs	
Number	1
Digital outputs	
Number as relay changeover contact	1
Output (resistive load)	DC 30 V, 0.5 A
Number as transistor	1
Output (resistive load)	DC 30 V, 0.5 A
Analog / digital inputs	
Number	1 (Differential input)
Resolution	10 bit
Switching threshold as digital input	
0→1	4 V
1→0	1.6 V
Analog outputs	
Number	1 (Non-isolated output)
PTC/ KTY interface	
1 motor temperature sensor input, sensors that can be connected PTC, KTY and Thermo-Click, accuracy ±5 °C	

### Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	No
Torque control, with encoder	No

## Data sheet for SINAMICS G120C

Article No. : 6SL3210-1KE13-2UB2

Ambient conditions	
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.005 m³/s (0.177 ft³/s)
Installation altitude	1,000 m (3,280.84 ft)

### Ambient temperature

Operation	-10 ... 40 °C (14 ... 104 °F)
Transport	-40 ... 70 °C (-40 ... 158 °F)
Storage	-40 ... 70 °C (-40 ... 158 °F)

### Relative humidity

Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
----------------	--

Connections	
-------------	--

### Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	--

### Line side

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)

### Motor end

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)

### DC link (for braking resistor)

Version	Plug-in screw terminals
Conductor cross-section	1.00 ... 2.50 mm² (AWG 18 ... AWG 14)
Line length, max.	15 m (49.21 ft)
PE connection	On housing with M4 screw

### Max. motor cable length

Shielded	150 m (492.13 ft)
Unshielded	150 m (492.13 ft)

Mechanical data	
-----------------	--

Degree of protection	IP20 / UL open type
Frame size	FSAA
Net weight	1.40 kg (3.09 lb)

### Dimensions


Width	73 mm (2.87 in)
Height	173 mm (6.81 in)
Depth	155 mm (6.10 in)

Standards	
-----------	--

Compliance with standards	UL, cUL, CE, C-Tick (RCM)
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Converter losses to IEC61800-9-2*	
-----------------------------------	--

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	27.3 %

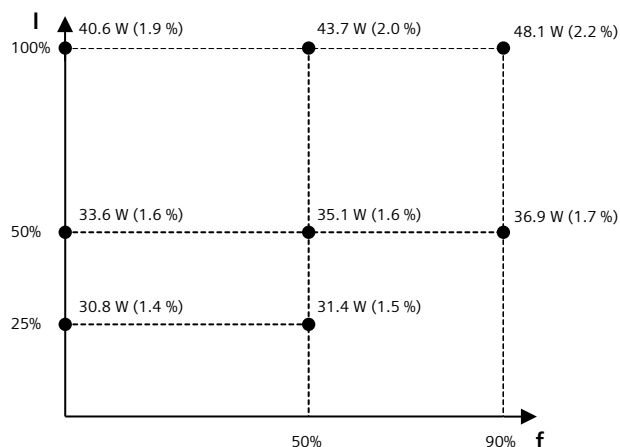

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard IEC61800-9-2) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

<sup>1)</sup>The output current and HP ratings are valid for the voltage range 440V-480V