


# CABLE TRUNKINGS SYSTEMS

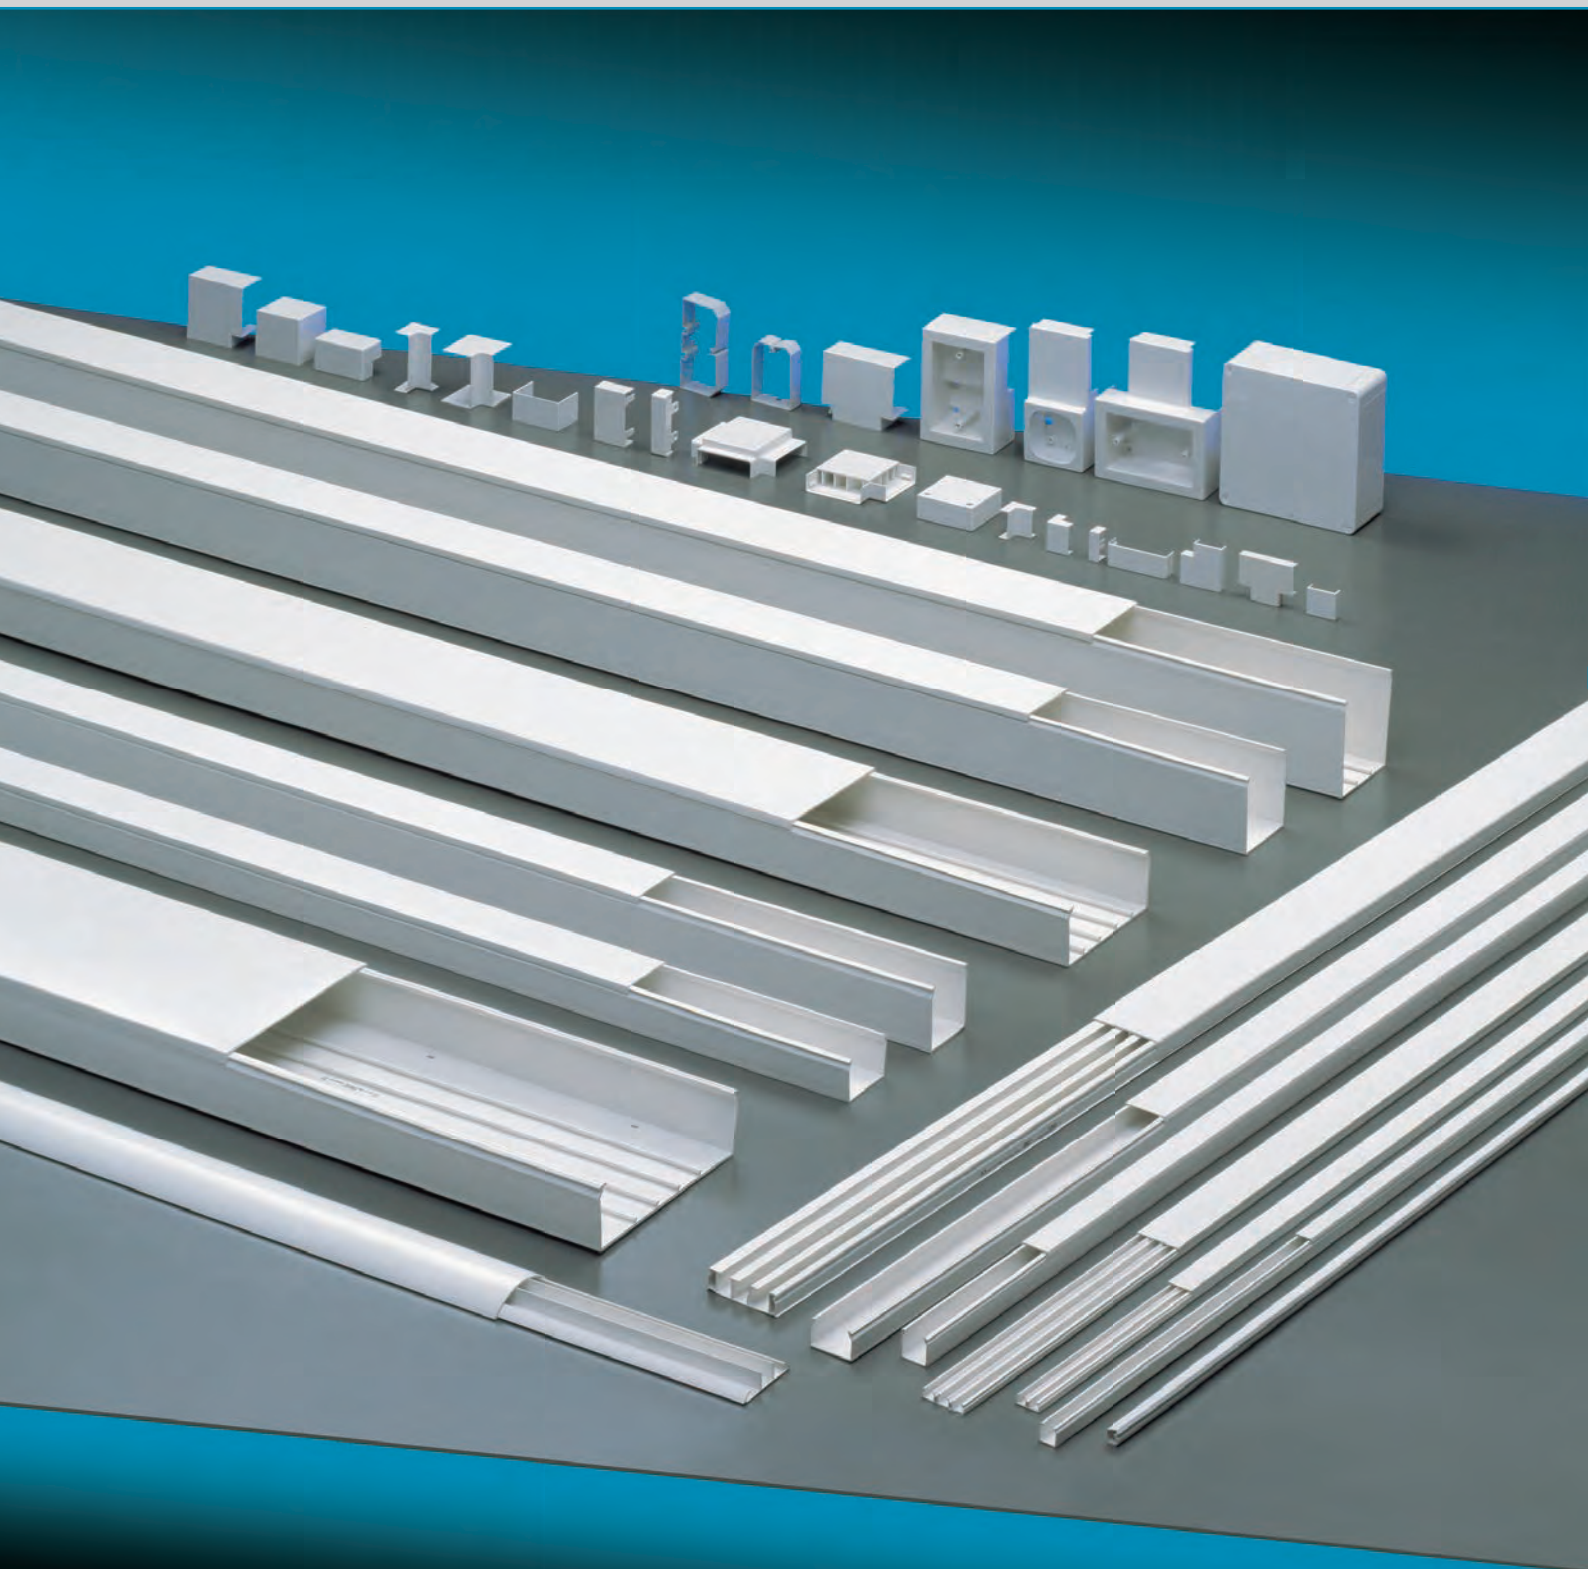

## MAIN TECHNICAL FEATURES

Material: technopolymer on rigid PVC base, self-extinguishing V0 (UL94) and high resistant to UV rays.

Standard colours: white RAL 9001 and grey RAL 7030.

System protection degree: IP40 (trunking + accessories).

Resistance to mechanical shocks: IK 07 (shocks up to 2J).

Resistance to heat in continuous use: up to +70° C.

Resistance to abnormal heat: up to 650° C (Glow Wire Test, Reference Standard IEC 60695-2-11).

Insulation resistance: > 100MΩ.

Dielectric voltage > 3.000 V.

Installation temperature range: minimum -5° C, maximum +60° C.

Standard length: 2 mt bars.

Reference standards: EN 50085-1, EN 50085-2-1.


Products meeting the safety objectives of Low Voltage Directive 2014/35/EU (Annex I).

Products in compliance with RoHS II - 2011/65/EU directive + 2015/863/EU.



Cable trunkings Series CP  
Trunkings, separators, cable retainers

page 64

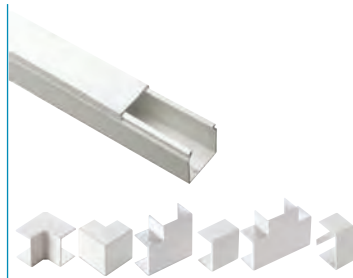

Cable trunking systems device  
installation trunking systems Series CP  
Trunkings and accessories

page 68



Halogen free cable  
trunkings Series CPH

page 83



Device installation trunking system  
Series KUADRA for standard devices  
45x45mm

page 84



Device installation trunking  
system Series BR for standard  
devices 60x60mm

page 87



Cable trunkings Series CP  
DIN dimensions pitch 12,5mm


page 88



Wall mounting modular enclosure  
IP40 white RAL 9001 with  
transparent door  
Series 600 page 89

## MAIN TECHNICAL FEATURES

Front-hooking cover without sharp edges, functional modern design

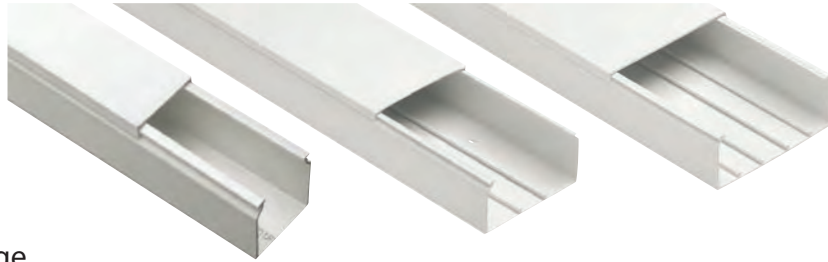


Perforated bottom for a quicker and more precise installation

Accessories for change of direction for any installation need



The cable trunkings can have 2, 3, 4 or 5 internal compartments for any distribution need

Cable retainers for a neat installation as well as a ceiling installation

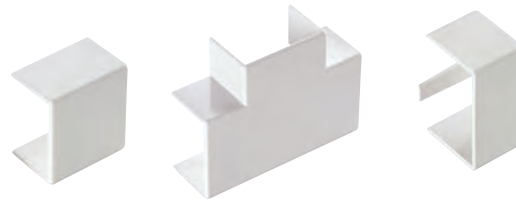

The separator has pre-cutting lines permitting to adjust it to the different trunking heights



The boxes for different devices and industrial sockets can serve as derivation boxes if closed with their cover

Fully made of self-extinguishing technopolymer on PVC base and available in white RAL 9001 and in grey RAL 7030, the cable and device trunkings can be installed on the wall, on the ceiling and, thanks to proper support brackets, as gangway.

Starting from the dimension 80x40 one or more sectionable separators can be put into the bottom to obtain up to 4 different compartments, perfectly divided to permit to put, in the same trunking, the wires of different

electric circuits: power, phone, data transmission and other, without any risk of interferences or inappropriate overlapping, according to the Standard CEI 64-8.

The derivation boxes has an appropriate grid allowing to keep the cables divided. The device boxes, equipped with a blank cover, can be also used as further junction boxes.

The several accessories for the change of direction, the derivation boxes and the device

boxes allow to put together a complete and functional distribution system.

The cable trunkings CP can be combined with skirting board and wall trunking system and the minitrunking system, as well as the modular enclosures manufactured in the same colour as the trunkings, in order to fulfill the installation and renovation needs with a compact elegant functional system.

mounting examples







## CABLE TRUNKINGS SERIES CP

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey**

CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	EXTERNAL DIMENSIONS W x H mm	READY FOR SEPARATOR	SECTION AREA mm <sup>2</sup>	PAKAGING m
ECCP2540B	25x40	NO	760	100
ECCP2560B	25x60	NO	1100	70
ECCP2580B	25x80	NO	1520	56
ECCP4040B	40x40	NO	1214	70
ECCP4060B	40x60	NO	1950	56
ECCP4080B	40x80	NO	2530	40
ECCP40100B	40x100	NO	3110	32
ECCP5050B	50x50	NO	2076	24
ECCP6040B	60x40	NO	1930	50
ECCP6060B	60x60	NO	3046	32
ECCP6080B	60x80	NO	4215	36
ECCP60100B	60x100	NO	5332	24



## CABLE TRUNKINGS SERIES CP

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey**


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	EXTERNAL DIMENSIONS W x H mm	READY FOR SEPARATOR	SECTION AREA mm <sup>2</sup>	PAKAGING m
ECCP7550B	75x50	YES (2)	3125	40
ECCP8040B	80x40	YES (2)	2530	40
ECCP8060B	80x60	YES (2)	4202	28
ECCP8080B	80x80	YES (2)	5620	30
ECCP80100B	80x100	YES (2)	7064	24
ECCP10040B	100x40	YES (2)	3316	28
ECCP10060B	100x60	YES (2)	5236	20
ECCP10080B	100x80	YES (2)	7156	24
ECCP100100B	100x100	YES (2)	8980	16
ECCP12040B	120x40	YES (2)	4040	24
ECCP12060B	120x60	YES (2)	6340	20
ECCP12080B	120x80	YES (2)	8640	16
ECCP15060B	150x60	YES (4)	7738	16
ECCP20060B	200x60	YES (4)	10278	16
ECCP20080B	200x80	YES (4)	14278	12
ECSESB	40/60/80	SECTIONABLE SEPARATORS	-	50

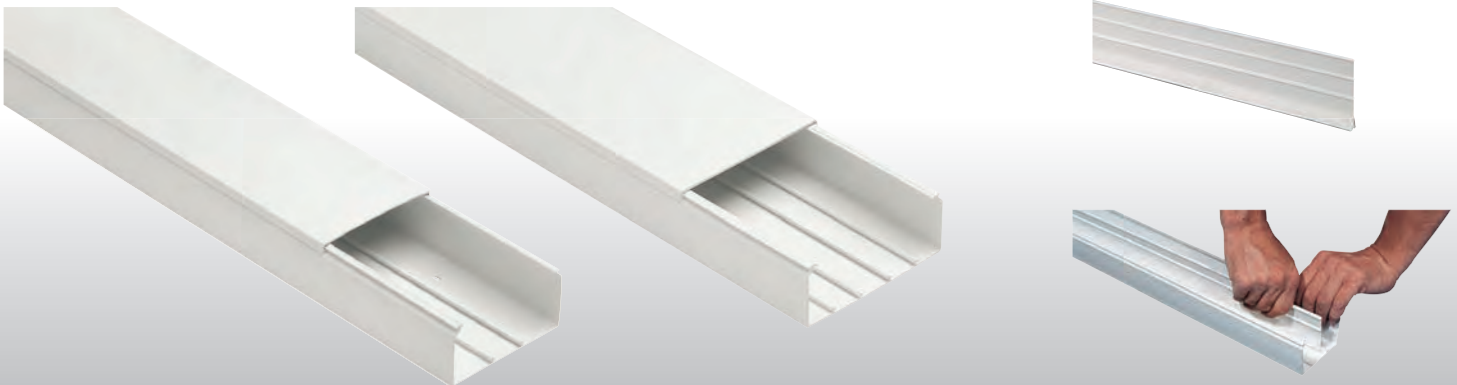



## CABLE RETAINER SERIES CO - SPARE COVER

### MAIN TECHNICAL FEATURES CABLE RETAINERS:

- Made of rigid nylon.
- Prevent the cables from falling off during the installation.
- Can be fixed to the trunking by screws.
- Cable retaining bars can be installed with a simple click.
- Can be used both in the cable trunkings and in the slotted trunkings.
- Cable retaining pieces and brass are recommended if the trunking is installed on the wall or on the ceiling.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

GREY RAL 7035

## Cable retainer series CO

ITEM	TRUNKING DIMENSIONS mm	DESCRIPTION	PACKAGING PIECES
ECCO4040	40x40	CABLE RETAINER	5/25
ECCO4060	40x60	CABLE RETAINER	5/25
ECCO4080	40x80	CABLE RETAINER	5/25
ECCO40100	40x100	CABLE RETAINER	5/25
ECCO6040	60x40	CABLE RETAINER	5/25
ECCO6060	60x60	CABLE RETAINER	5/25
ECCO6080	60x80	CABLE RETAINER	5/25
ECCO60100	60x100	CABLE RETAINER	5/25
ECCO8040	80x40	CABLE RETAINER	5/25
ECCO8060	80x60	CABLE RETAINER	5/25
ECCO8080	80x80	CABLE RETAINER	5/25
ECCO80100	80x100	CABLE RETAINER	5/25
ECCO10040	100x40	CABLE RETAINER	5/25
ECCO10060	100x60	CABLE RETAINER	5/25
ECCO10080	100x80	CABLE RETAINER	5/25
ECCO100100	100x100	CABLE RETAINER	5/25
ECCO12040	120x40	CABLE RETAINER	5/25
ECCO12060	120x60	CABLE RETAINER	5/25
ECCO12080	120x80	CABLE RETAINER	5/25
ECCO150	150x60	CABLE RETAINER BAR	5/25
ECCO200	200x60/80	CABLE RETAINER BAR	5/25

## Spare cover for cable trunkings - colour white RAL 9001

WHITE RAL 9001

ITEM	EXTERNAL DIMENSIONS mm	PACKAGING m
ECCR25B	for trunkings W = 25 mm	100
ECCR40B	for trunkings W = 40 mm	100
ECCR60B	for trunkings W = 60 mm	100
ECCR80B	for trunkings W = 80 mm	100
ECCR100B	for trunkings W = 100 mm	60
ECCR120B	for trunkings W = 120 mm	80
ECCR150B	for trunkings W = 150 mm	60
ECCR200B	for trunkings W = 200 mm	40



series CO



series CR


## COMPONENTS OF CABLE TRUNKING SYSTEMS

The cable trunking systems are composed of the trunking and accessories for the change of direction, the joining and the derivation, that, if correctly assembled and installed, form a system with protection degree IP40.


The accessories for the change of direction are set directly on the trunking with a click.

CABLE TRUNKING WITH COVER

*MADE OF SELF-EXTINGUISHING TECHNOPOLYMER*



90° INTERNAL ANGLE FOR CHANGE OF DIRECTION



90° EXTERNAL ANGLE FOR CHANGE OF DIRECTION



90° FLAT ANGLE FOR CHANGE OF DIRECTION



STRAIGHT JOINT TO LINK 2 TRUNKING TRACKS



T JOINT FOR DERIVATIONS ON THE SAME LEVEL



END CAP TO CLOSE STRAIGHT TRUNKING TRACKS



KIT ADAPTOR BOX HOLE CENTRE DISTANCE 60/67 mm

*TO INSTALL DEVICES FROM DIFFERENT STANDARDS OR SCHUKO SOCKETS THANKS TO THE DIFFERENT HOUSINGS FOR 60 mm HIGH TRUNKINGS*



INSTALLATION KIT FOR DEVICES HOLE CENTRE DISTANCE 83,5mm

*UP TO 3 ITALIAN STANDARD DEVICES FOR 60 mm HIGH TRUNKINGS*




BLANK COVER FOR BOX HOLE CENTRE DISTANCE 83,5 mm



INSTALLATION KIT FOR INDUSTRIAL SOCKETS

*TO INSTALL INDUSTRIAL SOCKETS IN 60MM HIGH TRUNKINGS SUITABLE FOR SOCKETS 16A, ADAPTABLE FOR 32A*



SEPARATION BOX FOR TRUNKINGS WITH SEVERAL COMPARTMENTS

*TO SEPARATE THE DIFFERENT ELECTRICAL CIRCUITS AND TO MAKE DERIVATIONS*



## CABLE TRUNKING SYSTEMS 40x40

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP4040B</b>	Cable trunking and cover	40x40	NO	70 m
<b>ECAI4040B</b>	Internal angle	40x40	-	2/50 pcs
<b>ECAE4040B</b>	External angle	40x40	-	2/50 pcs
<b>ECAP4040B</b>	Flat angle	40x40	-	2/50 pcs
<b>ECGU4040B</b>	Straight joint	40x40	-	2/50 pcs
<b>ECT4040B</b>	T-joint	40x40	-	2/50 pcs
<b>ECTT4040B</b>	End cap	40x40	-	2/50 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

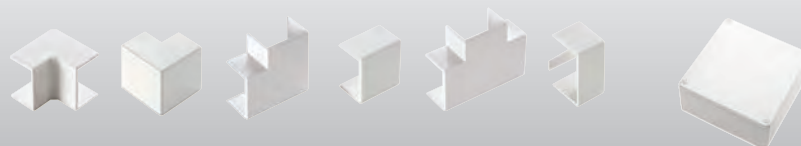

## CABLE TRUNKING SYSTEMS 60x40

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP6040B</b>	Cable trunking and cover	60x40	NO	50 m
<b>ECAI6040B</b>	Internal angle	60x40	-	2/50 pcs
<b>ECAE6040B</b>	External angle	60x40	-	2/50 pcs
<b>ECAP6040B</b>	Flat angle	60x40	-	2/50 pcs
<b>ECGU6040B</b>	Straight joint	60x40	-	2/50 pcs
<b>ECT6040B</b>	T-joint	60x40	-	2/50 pcs
<b>ECTT6040B</b>	End cap	60x40	-	2/50 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

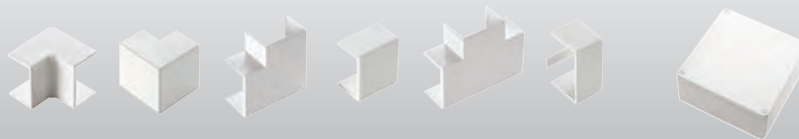

## CABLE TRUNKING SYSTEMS 60x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- Colour code: B = white, G = grey.


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP6060B</b>	Cable trunking and cover	60x60	NO	32 m
<b>ECAI6060B</b>	Internal angle	60x60	-	-/10 pcs
<b>ECAE6060B</b>	External angle	60x60	-	-/10 pcs
<b>ECAP6060B</b>	Flat angle	60x60	-	-/10 pcs
<b>ECGU6060B</b>	Straight joint	60x60	-	-/20 pcs
<b>ECT6060B</b>	T-joint	60x60	-	-/10 pcs
<b>ECTT6060B</b>	End cap	60x60	-	-/20 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

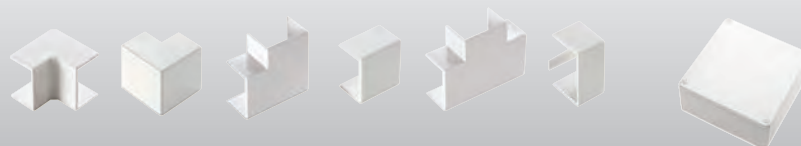

## CABLE TRUNKING SYSTEMS 80x40

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP8040B</b>	Cable trunking and cover	80x40	YES (2)	40 m
<b>ECAI8040B</b>	Internal angle	80x40	-	-/10 pcs
<b>ECAE8040B</b>	External angle	80x40	-	-/10 pcs
<b>ECAP8040B</b>	Flat angle	80x40	-	-/10 pcs
<b>ECGU8040B</b>	Straight joint	80x40	-	-/20 pcs
<b>ECTT8040B</b>	End cap	80x40	-	-/20 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING AND DEVICES INSTALLATION SYSTEMS 80x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP8060B</b>	Cable trunking and cover	80x60	YES (2)	28 m
<b>ECAI8060B</b>	Internal angle	80x60	-	-/10 pcs
<b>ECAE8060B</b>	External angle	80x60	-	-/10 pcs
<b>ECAP8060B</b>	Flat angle	80x60	-	-/10 pcs
<b>ECGU8060B</b>	Straight joint	80x60	-	-/20 pcs
<b>ECTT8060B</b>	End cap	80x60	-	-/20 pcs
<b>ECKIT80B</b>	Installation kit for 3 Italian devices - 83,5 mm	80x60	-	1/10 pcs
<b>ECCPB</b>	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"

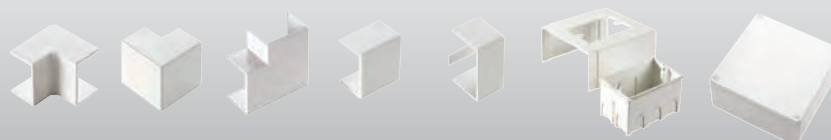

## CABLE TRUNKING SYSTEMS 80x80

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP8080B</b>	Cable trunking and cover	80x80	YES (2)	30 m
<b>ECAI8080B</b>	Internal angle	80x80	-	-/10 pcs
<b>ECAE8080B</b>	External angle	80x80	-	-/10 pcs
<b>ECAP8080B</b>	Flat angle	80x80	-	-/10 pcs
<b>ECGU8080B</b>	Straight joint	80x80	-	-/20 pcs
<b>ECTT8080B</b>	End cap	80x80	-	-/20 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

T-joint is obtained by straight joint "GU"





## CABLE TRUNKING SYSTEMS 100x40

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP10040B</b>	Cable trunking and cover	100x40	YES (2)	28 m
<b>ECAI10040B</b>	Internal angle	100x40	-	-/10 pcs
<b>ECAE10040B</b>	External angle	100x40	-	-/10 pcs
<b>ECAP10040B</b>	Flat angle	100x40	-	-/10 pcs
<b>ECGU10040B</b>	Straight joint	100x40	-	-/20 pcs
<b>ECTT10040B</b>	End cap	100x40	-	-/20 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING AND DEVICES INSTALLATION SYSTEMS 100x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP10060B</b>	Cable trunking and cover	100x60	YES (2)	20 m
<b>ECAI10060B</b>	Internal angle	100x60	-	-/10 pcs
<b>ECAE10060B</b>	External angle	100x60	-	-/10 pcs
<b>ECAP10060B</b>	Flat angle	100x60	-	-/10 pcs
<b>ECGU10060B</b>	Straight joint	100x60	-	-/20 pcs
<b>ECTT10060B</b>	End cap	100x60	-	-/20 pcs
<b>ECKIT100A</b>	Kit adaptor box hole center distance 60/67 mm	100x60	-	1/10 pcs
<b>ECKIT100B</b>	Installation kit for 3 Italian devices - 83,5 mm	100x60	-	1/10 pcs
<b>ECCPB</b>	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
<b>ECKIT100C</b>	Kit for industrial sockets Suitable for sockets 16A, adaptable for 32A	100x60	-	1/10 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING SYSTEMS 100x80

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP10080B</b>	Cable trunking and cover	100x80	YES (2)	24 m
<b>ECAI10080B</b>	Internal angle	100x80	-	-/10 pcs
<b>ECAE10080B</b>	External angle	100x80	-	-/10 pcs
<b>ECAP10080B</b>	Flat angle	100x80	-	-/10 pcs
<b>ECGU10080B</b>	Straight joint	100x80	-	-/20 pcs
<b>ECTT10080B</b>	End cap	100x80	-	-/20 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING SYSTEMS 120x40

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP12040B</b>	Cable trunking and cover	120x40	YES (2)	24 m
<b>ECAI12040B</b>	Internal angle	120x40	-	-/10 pcs
<b>ECAE12040B</b>	External angle	120x40	-	-/10 pcs
<b>ECAP12040B</b>	Flat angle	120x40	-	-/10 pcs
<b>ECGU12040B</b>	Straight joint	120x40	-	-/20 pcs
<b>ECTT12040B</b>	End cap	120x40	-	-/20 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"

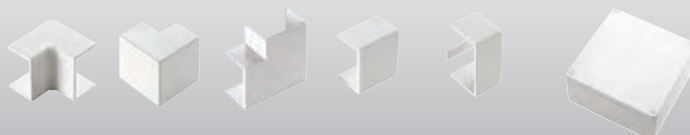

## CABLE TRUNKING AND DEVICES INSTALLATION SYSTEMS 120x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP12060B</b>	Cable trunking and cover	120x60	YES (2)	20 m
<b>ECAI12060B</b>	Internal angle	120x60	-	-/10 pcs
<b>ECAE12060B</b>	External angle	120x60	-	-/10 pcs
<b>ECAP12060B</b>	Flat angle	120x60	-	-/10 pcs
<b>ECGU12060B</b>	Straight joint	120x60	-	-/10 pcs
<b>ECTT12060B</b>	End cap	120x60	-	-/20 pcs
<b>ECKIT120A</b>	Kit adaptor box hole center distance 60/67 mm	120x60	-	1/10 pcs
<b>ECKIT120B</b>	Installation kit for 3 Italian devices - 83,5 mm	120x60	-	1/10 pcs
<b>ECCPB</b>	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
<b>ECKIT120C</b>	Kit for industrial sockets Suitable for sockets 16A, adaptable for 32A	120x60	-	1/10 pcs
<b>ECSSB2</b>	Separation and derivation box	165x165x75	-	1/5 pcs

T-joint is obtained by straight joint "GU"

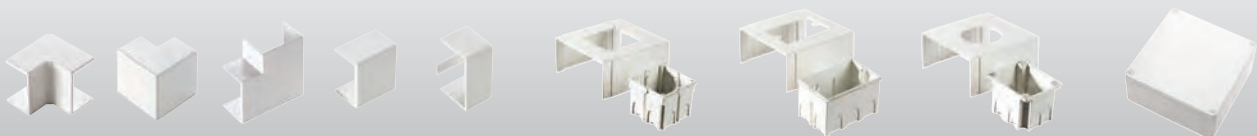

## CABLE TRUNKING SYSTEMS 120x80

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE


WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP12080B</b>	Cable trunking and cover	120x80	YES (2)	16 m
<b>ECAI12080B</b>	Internal angle	120x80	-	-/10 pcs
<b>ECAE12080B</b>	External angle	120x80	-	-/10 pcs
<b>ECAP12080B</b>	Flat angle	120x80	-	-/8 pcs
<b>ECGU12080B</b>	Straight joint	120x80	-	-/10 pcs
<b>ECTT12080B</b>	End cap	120x80	-	-/20 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING AND DEVICES INSTALLATION SYSTEMS 150x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP15060B</b>	Cable trunking and cover	150x60	YES (4)	16 m
<b>ECAI15060B</b>	Internal angle	150x60	-	-/8 pcs
<b>ECAE15060B</b>	External angle	150x60	-	-/8 pcs
<b>ECAP15060B</b>	Flat angle	150x60	-	-/8 pcs
<b>ECGU15060B</b>	Straight joint	150x60	-	-/10 pcs
<b>ECTT15060B</b>	End cap	150x60	-	-/10 pcs
<b>ECKIT150A</b>	Kit adaptor box hole center distance 60/67 mm	150x60	-	1/5 pcs
<b>ECKIT150B</b>	Installation kit for 3 Italian devices - 83,5 mm	150x60	-	1/5 pcs
<b>ECCPB</b>	Blank cover for box hole center distance 83,5 mm	117x80x5	-	5/50 pcs
<b>ECKIT150C</b>	Kit for industrial sockets Suitable for sockets 16A, adaptable for 32A	150x60	-	1/5 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

T-joint is obtained by straight joint "GU"



## CABLE TRUNKING SYSTEMS 200x60

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>ECCP20060B</b>	Cable trunking and cover	200x60	YES (4)	16 m
<b>ECAI20060B</b>	Internal angle	200x60	-	-/5 pcs
<b>ECAE20060B</b>	External angle	200x60	-	-/4 pcs
<b>ECAP20060B</b>	Flat angle	200x60	-	-/8 pcs
<b>ECGU20060B</b>	Straight joint	200x60	-	-/10 pcs
<b>ECTT20060B</b>	End cap	200x60	-	-/10 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

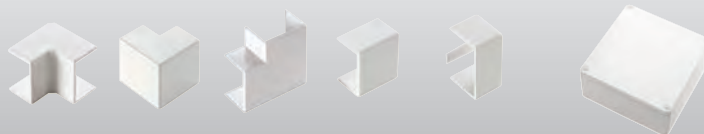



## CABLE TRUNKING SYSTEMS 200x80

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**


CE

WHITE RAL 9001

IP40

GREY RAL 7030

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m /PIECES
<b>ECCP20080B</b>	Cable trunking and cover	200x80	YES (4)	12 m
<b>ECAI20080B</b>	Internal angle	200x80	-	-/5 pcs
<b>ECAE20080B</b>	External angle	200x80	-	-/4 pcs
<b>ECAP20080B</b>	Flat angle	200x80	-	-/6 pcs
<b>ECGU20080B</b>	Straight joint	200x80	-	-/10 pcs
<b>ECTT20080B</b>	End cap	200x80	-	-/10 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs

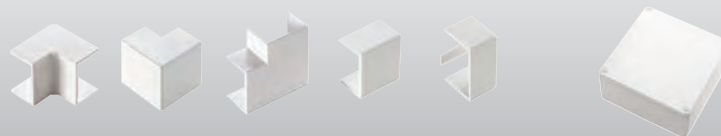


## ■ HALOGEN FREE CABLE TRUNKINGS SYSTEMS SERIES CPH

### MAIN TECHNICAL FEATURES:

- Made of halogen free technopolymer according to the Standards EN 50267-2-1, EN 50267-2-2, IEC 60754-1, IEC60754-2.
- Emission limits according to the Standards: HCl, HBr, HF: <0,1%.
- Self-extinguishing according to the Standards UL94 V2 at 1,6 mm.
- Resistance to abnormal heat: up to 960°C (Glow Wire Test, Reference Standard IEC 60695-2-11).
- Dimensional stability between -25° to +90°C.
- Complying with Reference Standards EN 50085-1:2005, EN 50085-2-1.
- Packed in strong cardboard boxes suitable for transport and storage.



**IP40**




## ■ Halogen free cable trunking - colour grey RAL 7035

ITEM	DESCRIPTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m
<b>ECCPH2540</b>	Cable trunking and cover	25x40	-	100
<b>ECCPH2560</b>	Cable trunking and cover	25x60	-	70
<b>ECCPH2580</b>	Cable trunking and cover	25x80	-	56
<b>ECCPH4040</b>	Cable trunking and cover	40x40	-	70
<b>ECCPH4060</b>	Cable trunking and cover	40x60	-	56
<b>ECCPH4080</b>	Cable trunking and cover	40x80	-	40
<b>ECCPH6040</b>	Cable trunking and cover	60x40	-	50
<b>ECCPH6060</b>	Cable trunking and cover	60x60	-	32
<b>ECCPH6080</b>	Cable trunking and cover	60x80	-	36
<b>ECCPH8040</b>	Cable trunking and cover	80x40	YES (2)	40
<b>ECCPH8060</b>	Cable trunking and cover	80x60	YES (2)	28
<b>ECCPH8080</b>	Cable trunking and cover	80x80	YES (2)	30
<b>ECCPH10040</b>	Cable trunking and cover	100x40	YES (2)	28
<b>ECCPH10060</b>	Cable trunking and cover	100x60	YES (2)	20
<b>ECCPH10080</b>	Cable trunking and cover	100x80	YES (2)	24
<b>ECCPH12040</b>	Cable trunking and cover	120x40	YES (2)	24
<b>ECCPH12060</b>	Cable trunking and cover	120x60	YES (2)	20
<b>ECCPH12080</b>	Cable trunking and cover	120x80	YES (2)	16

## ■ Spare cover for halogen free cable trunking - colour grey RAL 7035

ITEM	DIMENSIONS W mm	PACKAGING m
<b>ECCR25HG</b>	for trunkings W = 25 mm	100
<b>ECCR40HG</b>	for trunkings W = 40 mm	100
<b>ECCR60HG</b>	for trunkings W = 60 mm	100
<b>ECCR80HG</b>	for trunkings W = 80 mm	100
<b>ECCR100HG</b>	for trunkings W = 100 mm	60
<b>ECCR120HG</b>	for trunkings W = 120 mm	80

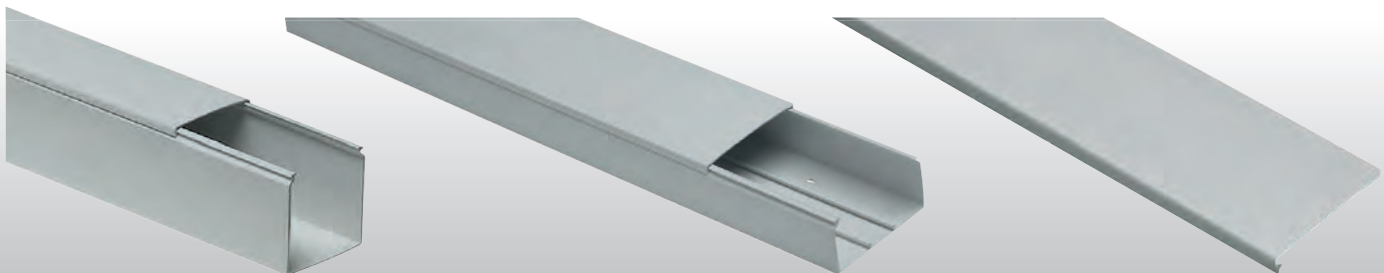

## 45x45 DEVICE INSTALLATION TRUNKING SYSTEMS SERIES KUADRA

### MAIN TECHNICAL FEATURES:

- 45x45mm device installation trunking – 1 compartment.
- Made of self-extinguishing technopolymer on rigid PVC base.
- Shock resistance: IK08 (shocks up to 6J).
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

IP40


WHITE RAL 9001

## Trunking 90x55 - for cables and 45x45 mm standard devices

ITEM	DESCRIPTION - USEFUL SECTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
EC2209055	Trunking and cover 1 compartment - 4.003 mm <sup>2</sup>	90x55	YES (2)	24 m
EC220AI9055	Variable internal angle	90x55	-	1/10 pcs
EC220AE9055	Variable external angle	90x55	-	1/10 pcs
EC220AP9055	Flat angle	90x55	-	1/10 pcs
EC220GU9055	Straight joint	-	-	10/50 pcs
EC220GC45	Cover joint	45	-	5/50 pcs
EC220GA45	Cover/ Device joint	45	-	5/50 pcs
EC220TT9055	End cap	90x55	-	2/10 pcs
ECSSB2	Separation and derivation box	165x165x75	-	1/5 pcs
ECSESB	Separator	-	-	50 m
EC220CC45	Additional cover	45	-	50 m
EC220CC25	Bottom cover for double insulation	25x100	-	50 pz.



**improved**



AI



AE



AP



GU



GC



GA



TT



SSB



SES



CC45



CC25

**KUADRA  
SYSTEM**

## 45x45 DEVICE INSTALLATION TRUNKING SYSTEMS **SERIES KUADRA**

### MAIN TECHNICAL FEATURES:

- 45x45mm device installation trunking – 2 compartments.
- Made of self-extinguishing technopolymer on rigid PVC base.
- Shock resistance: IK08 (shocks up to 6J).
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

**IP40**

WHITE RAL 9001

## Trunking 135x55 with 2 compartments - for cables and 45x45 mm standard devices

ITEM	DESCRIPTION - USEFUL SECTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
<b>EC22013555-2</b>	Trunking and cover 2 compartments -6.193 mm <sup>2</sup>	135x55	YES (4)	16 m
<b>EC220AI13555</b>	Variable internal angle	135x55	-	1/10 pcs
<b>EC220AE13555</b>	Variable external angle	135x55	-	1/8 pcs
<b>EC220AP13555</b>	Flat angle	135x55	-	1/8 pcs
<b>EC220GU9055</b>	Straight joint	-	-	10/50 pcs
<b>EC220GC45</b>	Cover joint	45	-	5/50 pcs
<b>EC220GA45</b>	Cover/ Device joint	45	-	5/50 pcs
<b>EC220TT13555</b>	End cap	135x55	-	2/10 pcs
<b>ECSSB3</b>	Separation and derivation box	250x250x100	-	1/4 pcs
<b>ECSESB</b>	Separator	-	-	50 m
<b>EC220CC45</b>	Additional cover	45	-	50 m
<b>EC220CC25</b>	Bottom cover for double insulation	25x100	-	50 pz.



**improved**



**KUADRA  
SYSTEM**

## 45x45 DEVICE INSTALLATION TRUNKING SYSTEMS SERIES KUADRA

### MAIN TECHNICAL FEATURES:

- 45x45mm device installation trunking – 3 compartments.
- Made of self-extinguishing technopolymer on rigid PVC base.
- Shock resistance: IK08 (shocks up to 6J).
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.

CE

IP40

WHITE RAL 9001

## Trunking 165x55 with 3 compartments - for cables and 45x45 mm standard devices

ITEM	DESCRIPTION - USEFUL SECTION	DIMENSIONS W x H mm	READY FOR SEPARATOR	PACKAGING m / PIECES
EC22016555-3	Trunking and cover 3 compartments - 7.544 mm <sup>2</sup>	165x55	YES (6)	16 m
EC220AI16555	Variable internal angle	165x55	-	1/10 pcs
EC220AE16555	Variable external angle	165x55	-	1/8 pcs
EC220AP16555	Flat angle	165x55	-	1/8 pcs
EC220GU16555	Straight joint	165x55	-	10/50 pcs
EC220GC45	Cover joint	45	-	5/50 pcs
EC220GA45	Cover/ Device joint	45	-	5/50 pcs
EC220TT16555	End cap	165x55	-	2/10 pcs
ECSSB3	Separation and derivation box	250x250x100	-	1/4 pcs
ECSESB	Separator	-	-	50 m
EC220CC45	Additional cover	45	-	50 m
EC220CC25	Bottom cover for double insulation	25x100	-	50 pz.



**improved**



**KUADRA  
SYSTEM**

## 60x60 DEVICE INSTALLATION TRUNKING SYSTEMS **SERIES BR**

### MAIN TECHNICAL FEATURES:

- 60x60mm device installation trunking.
- Made of self-extinguishing technopolymer on rigid PVC base.
- Shock resistance: IK08 (shocks up to 6J).
- Perforated bottom for fixing by screws or plugs.
- Accessories are set onto the trunking with a simple click.
- Protection degree IP 40 only if installed with the proper accessories.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.



**IP40**

WHITE RAL 9001


## Trunking 110x60 - 135x65 - for cables and 60x60 mm standard devices

ITEM	DESCRIPTION - USEFUL SECTION	DIMENSIONS W x H mm	PACKAGING m / PIECES
<b>ECBR11060B</b>	Trunking and cover - 5.702 mm <sup>2</sup>	110x60	20 m
<b>ECBR13065B</b>	Trunking and cover - 7.452 mm <sup>2</sup>	130x65	12 m
<b>ECBRC80B</b>	Spare cover	80	100 m
<b>ECBRAI11060B</b>	Internal angle 110x60	110x60	1 pcs
<b>ECBRAI13065B</b>	Internal angle 130x65	130x65	1 pcs
<b>ECBRAE11060B</b>	External angle 110x60	110x60	1 pcs
<b>ECBRAE13065B</b>	External angle 130x65	130x65	1 pcs
<b>ECBRTT11060B</b>	End cap 110x60	110x60	10 pcs
<b>ECBRTT13065B</b>	End cap 130x65	130x65	10 pcs
<b>ECBRS1</b>	Adaptor box 60x60 mm - 1 standard device	71x71x50	50 pcs
<b>ECBRS2</b>	Adaptor box 60x60 mm - 2 standard device	142x71x50	25 pcs

The boxes BRS1 and BRS2 can be mounted on both trunkings and are suitable to be joined together in order to obtain a 3-gang box.

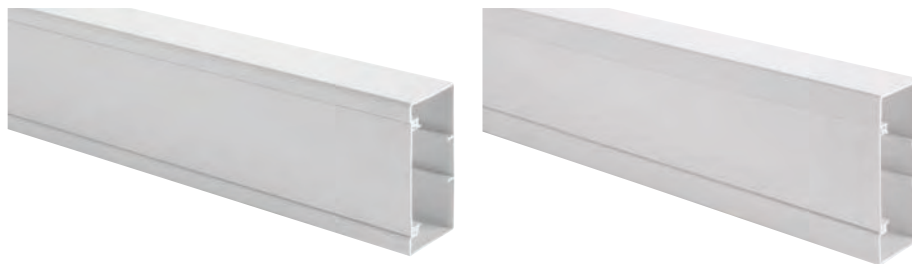

**ECBRAI**



**ECBRAE**



**ECBRTT**



**ECBRS**

## CABLE TRUNKING SYSTEMS DIN PITCH- 12,5 mm **SERIES CP**

### MAIN TECHNICAL FEATURES:

- Made of self-extinguishing technopolymer on rigid PVC base.
- Perforated bottom for fixing by screws or plugs.
- Dimensions of DIN pitch 12,5mm.
- Standard bar length: 2m.
- Packed in strong cardboard boxes suitable for transport and storage.
- **Colour code: B = white, G = grey.**

CE

WHITE RAL 9001

**IP40**

GREY RAL 7030

## Cable trunking DIN pitch 12,5 mm

ITEM	DIMENSIONS W x H mm	READY FOR SEPARATOR	SECTION mm <sup>2</sup>	PACKAGING m
<b>ECCP5050B</b>	50x50	NO	2076	24
<b>ECCP7550B</b>	75x50	YES (2)	3125	40
<b>ECCP5050G</b>	50x50	NO	2076	24
<b>ECCP7550G</b>	75x50	YES (2)	3125	40



## WALL MOUNTING WHITE MODULAR ENCLOSURES SERIES 600

### MAIN TECHNICAL FEATURES:

- Reversible door made of smoky grey polycarbonate.
- Suitable for housing the brass terminals.
- Suitable for plumbing of the cover.
- Galvanized steel DIN rail already mounted.
- Lid for unused modules.
- Self-adhesive label to identify the different circuit.
- Screw caps for double insulation.



**IP40**



### To be used in combination with the trunkings

ITEM	EXTERNAL DIMENSIONS W x H x D mm	MODULE NR. (17,5 mm)	POWER LOSS (Watt) EN 60670-24	PACKAGING PIECES
<b>EC60004B</b>	150x170x100	4	22	1/22
<b>EC60008B</b>	200x180x100	8	14	1/15
<b>EC60012B</b>	280x220x100	12	21	1/8
<b>EC60018B</b>	400x265x130	18	24	-/1
<b>EC60024B</b>	280x350x100	24 (2x12)	30	-/1
<b>EC60036B</b>	400x400x130	36 (2x18)	47	-/1
<b>EC60054B</b>	400x600x130	54 (3x18)	72	-/1
<b>EC60072B</b>	420x885x150	72 (4x18)	85	-/1

Available with solid white door on request



EC60004B

EC60008B

EC60012B

EC60018B

EC60024B

EC60036B

EC60054B

EC60072B



## INSTALLATION INSTRUCTIONS FOR THE CABLE TRUNKING SYSTEMS




To install the minitrunkings or the cable trunkings on walls or ceilings, or in any case on non-conducting surfaces, it is strongly recommended using expanding plugs (our item TC), minimum diameter 4mm and maximum diameter 6mm with their screws, or steel nails, minimum 30cm and maximum 70cm one from the other. Always fix the trunking close to the accessories. To anchor the trunking to metallic walls not connected to the earthing circuit or in any case to conducting surfaces, it is suggested employing a silicone adhesive or a common mastic, easy to find on the market; taking into account that the indications for use must be carefully followed.

For not particularly hard uses it is suggested to install the trunkings by a double-sided adhesive tape, so that the installation turns out to be easier and quicker. Before proceeding please verify the holding of the adhesive tape on a test sample, which must be smooth and clean.


To cut the trunking and its cover please use a fine toothed hacksaw.

To change direction please use our accessories with the same dimension as the trunking, as indicated in our catalogue and according to the indications of the reference Standards EN50085-1, EN50085-2-1.

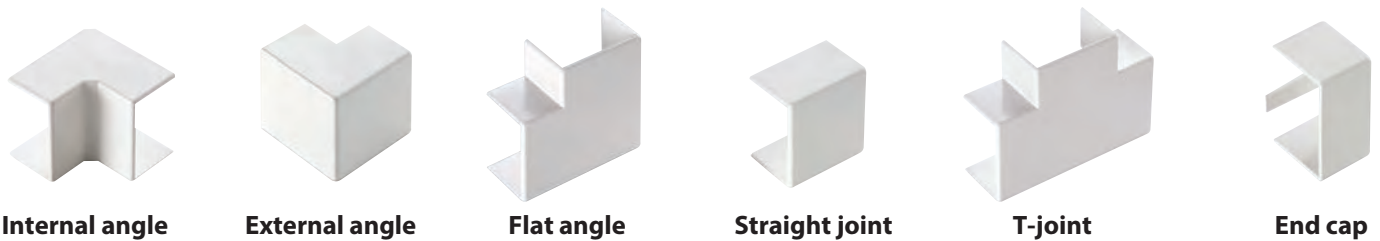

Once the trunking has been fixed to the wall, the separators, the junction and/or device boxes have been installed and the wiring has been done, the cover can be mounted on the bottom with a simple click; if necessary cut the lid in order to hook the accessories (placed as indicated below) on to the trunking.

In order to gain the correct protection degree IP, the accessories must be fixed to the trunking by securing the tang of the end cap to the trunking through the passing screw and by sticking the accessories for the change of direction to the trunking bottom with a silicon mastic.

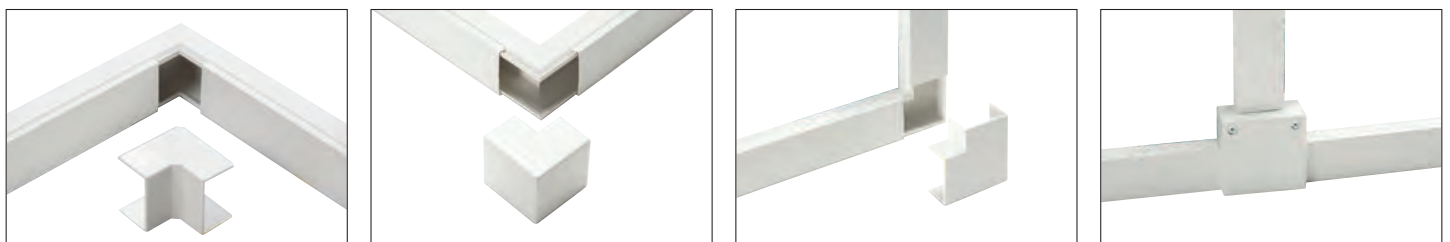


**Internal angle**

**External angle**

**Flat angle**


**Separation box for trunkings with separators**

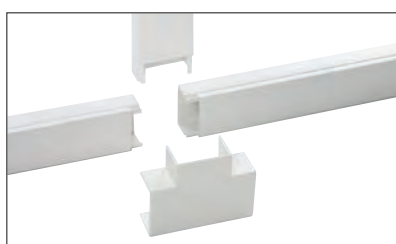

**T-joint**



**Straight joint**

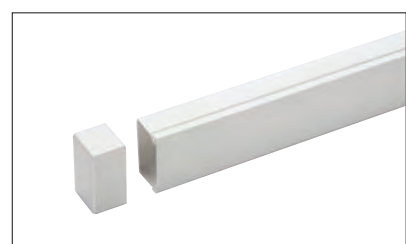


**End cap**

## USEFUL SECTION OF THE MINITRUNKINGS AND TRUNKINGS SERIES MC - CP

ITEM	DESCRIPTION	SECTION mm <sup>2</sup>	CABLE TYPE HO7-U/R/K			
			1	mm <sup>2</sup> 1,5	2,5	4
ECMC2010	Minitrunking 1 compartment dim. 20x10 mm	126	12	9	6	4
ECMC2210-1	Minitrunking 1 compartment dim. 22x10 mm	128	12	9	6	4
ECMC2210	Minitrunking 2 compartments dim. 22x10 mm	126	12	9	6	4
ECMC3010-1	Minitrunking 1 compartment dim. 30x10 mm	174	17	12	9	6
ECMC3010	Minitrunking 2 compartments dim. 30x10 mm	172	16	12	9	6
ECMC4010	Minitrunking 3 compartments dim. 40x10 mm	220	21	16	11	7
ECMC1517	Minitrunking 1 compartment dim. 15x17 mm	168	16	12	8	6
ECMC2517	Minitrunking 1 compartment dim. 25x17 mm	249	24	18	12	8
ECMC4017-1	Minitrunking 1 compartment dim. 40x17 mm	418	40	30	21	14
ECMC4017	Minitrunking 2 compartments dim. 40x17 mm	416	40	30	21	14
ECMC6017	Minitrunking 3 compartments dim. 60x17 mm	685	65	49	34	23
ECMC5020	Minitrunking 1 compartment dim. 50x20 mm	625	60	45	31	21
ECMC5020-1	Minitrunking 2 compartments dim. 50x20 mm	620	59	44	31	21
ECMC5020-2	Minitrunking 3 compartments dim. 50x20 mm	615	59	44	31	21
ECMC2525	Minitrunking 1 compartment dim. 25x25 mm	480	46	34	24	16
ECMC4025	Minitrunking 1 compartment dim. 40x25 mm	752	72	54	38	25
ECMC1515B	Minitrunking 1 compartment dim. 15x15 mm	148	14	10	7	4
ECMC1818B	Minitrunking 1 compartment dim. 18x18 mm	210	18	13	9	5
ECMC2020B	Minitrunking 1 compartment dim. 20x20 mm	264	24	17	12	7
ECMC3015B	Minitrunking 1 compartment dim. 30x15 mm	283	26	19	13	7
ECMC3030B	Minitrunking 1 compartment dim. 30x30 mm	652	62	46	32	17
ECCP2540	Cable trunking with cover dim. 25x40 mm	760	72	54	38	25
ECCP2560	Cable trunking with cover dim. 25x60 mm	1100	105	79	55	37
ECCP2580	Cable trunking with cover dim. 25x80 mm	1520	145	109	76	51
ECCP4040	Cable trunking with cover dim. 40x40 mm	1214	116	87	61	40
ECCP4060	Cable trunking with cover dim. 40x60 mm	1950	186	139	98	65
ECCP4080	Cable trunking with cover dim. 40x80 mm	2530	241	181	127	84
ECCP40100	Cable trunking with cover dim. 40x100 mm	3110	296	222	156	104
ECCP5050	Cable trunking with cover dim. 50x50 mm	2076	198	148	104	69
ECCP6040	Cable trunking with cover dim. 60x40 mm	1930	184	138	97	64
ECCP6060	Cable trunking with cover dim. 60x60 mm	3046	290	218	152	102
ECCP6080	Cable trunking with cover dim. 60x80 mm	4215	401	301	211	141
ECCP60100	Cable trunking with cover dim. 60x100 mm	5332	508	381	267	178
ECCP7550	Cable trunking with cover dim. 75x50 mm	3125	296	222	156	104
ECCP8040	Cable trunking with cover dim. 80x40 mm	2530	241	181	127	84
ECCP8060	Cable trunking with cover dim. 80x60 mm	4202	400	300	210	140
ECCP8080	Cable trunking with cover dim. 80x80 mm	5620	535	401	281	187
ECCP80100	Cable trunking with cover dim. 80x100 mm	7064	673	505	353	235
ECCP10040	Cable trunking with cover dim. 100x40 mm	3316	316	237	166	111
ECCP10060	Cable trunking with cover dim. 100x60 mm	5236	499	374	262	175
ECCP10080	Cable trunking with cover dim. 100x80 mm	7156	682	511	358	239
ECCP100100	Cable trunking with cover dim. 100x100 mm	8980	855	641	449	299
ECCP12040	Cable trunking with cover dim. 120x40 mm	4040	385	289	202	135
ECCP12060	Cable trunking with cover dim. 120x60 mm	6340	604	453	317	211
ECCP12080	Cable trunking with cover dim. 120x80 mm	8640	823	617	432	288
ECCP15060	Cable trunking with cover dim. 150x60 mm	7738	737	553	387	258
ECCP20060	Cable trunking with cover dim. 200x60 mm	10278	979	734	514	343
ECCP20080	Cable trunking with cover dim. 200x80 mm	14278	1360	1020	714	476

## CHOICE TABLES FOR CABLE TRUNKING SYSTEMS



ITEM						ITEM		
DIMENSIONS WxH mm	TRUNKING AND COVER	SEPARATOR	COMPARTMENT NR.	SECTION mm <sup>2</sup>	PACKAGING m	CABLE RETAINER	INTERNAL ANGLE	EXTERNAL ANGLE
25x40	ECCP2540B	NO	-	760	100	-	-	-
25x60	ECCP2560B	NO	-	1100	70	-	-	-
25x80	ECCP2580B	NO	-	1520	56	-	-	-
40x40	ECCP4040B	NO	-	1214	70	ECCO4040	ECAI4040B	ECAE4040B
40x60	ECCP4060B	NO	-	1950	56	ECCO4060	-	-
40x80	ECCP4080B	NO	-	2530	40	ECCO4080	-	-
40x100	ECCP40100B	NO	-	3110	32	ECCO40100	-	-
50x50	ECCP5050B	NO	-	2076	24	-	-	-
60x40	ECCP6040B	NO	-	1930	50	ECCO6040	ECAI6040B	ECAE6040B
60x60	ECCP6060B	NO	-	3046	32	ECCO6060	ECAI6060B	ECAE6060B
60x80	ECCP6080B	NO	-	4215	36	ECCO6080	-	-
60x100	ECCP60100B	NO	-	5332	24	ECCO60100	-	-
75x50	ECCP7550B	ECSESB	2	3125	40	-	-	-
80x40	ECCP8040B	ECSESB	2	2530	40	ECCO8040	ECAI8040B	ECAE8040B
80x60	ECCP8060B	ECSESB	2	4202	28	ECCO8060	ECAI8060B	ECAE8060B
80x80	ECCP8080B	ECSESB	2	5620	30	ECCO8080	ECAI8080B	ECAE8080B
80x100	ECCP80100B	ECSESB	2	7064	24	ECCO80100	-	-
100x40	ECCP10040B	ECSESB	2	3316	28	ECCO10040	ECAI10040B	ECAE10040B
100x60	ECCP10060B	ECSESB	2	5236	20	ECCO10060	ECAI10060B	ECAE10060B
100x80	ECCP10080B	ECSESB	2	7156	24	ECCO10080	ECAI10080B	ECAE10080B
100x100	ECCP100100B	ECSESB	2	8980	16	ECCO100100	-	-
120x40	ECCP12040B	ECSESB	2	4040	24	ECCO12040	ECAI12040B	ECAE12040B
120x60	ECCP12060B	ECSESB	2	6340	20	ECCO12060	ECAI12060B	ECAE12060B
120x80	ECCP12080B	ECSESB	2	8640	16	ECCO12080	ECAI12080B	ECAE12080B
150x60	ECCP15060B	ECSESB	4	7738	16	ECCO150	ECAI15060B	ECAE15060B
200x60	ECCP20060B	ECSESB	4	10278	16	ECCO200	ECAI20060B	ECAE20060B
200x80	ECCP20080B	ECSESB	4	14278	12	ECCO200	ECAI20080B	ECAE20080B

## CHOICE TABLES FOR WALL MOUNTING MODULAR ENCLOSURE SERIES 600 (for further information see page 249)

ITEM	EC60004B	EC60008B	EC60012B	EC60018B	EC60024B	EC60036B	EC60054B	EC60072B
	EXTERNAL DIM. W x H x D mm	150x70x100	200x180x100	280x220x100	400x265x130	280x350x100	400x400x130	400x600x130



ITEM								
FLAT ANGLE	STRAIGHT JOINT	T-JOINT	END CAP	KIT 3 ITALIAN DEVICES	BLANK COVER	KIT CENTRE HOLE 60/67 mm	KIT INDUSTRIAL SOCKETS	SEPARATOR BOX
-	-	-	-	-	-	-	-	ECSSB2
-	-	-	-	-	-	-	-	ECSSB2
-	-	-	-	-	-	-	-	ECSSB3
ECAP4040B	ECGU4040B	ECT4040B	ECTT4040B	-	-	-	-	ECSSB2
-	-	-	-	-	-	-	-	ECSSB2
-	-	-	-	-	-	-	-	ECSSB3
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	ECSSB2
ECAP6040B	ECGU6040B	ECT6040B	ECTT6040B	-	-	-	-	ECSSB2
ECAP6060B	ECGU6060B	ECT6060B	ECTT6060B	-	-	-	-	ECSSB2
-	-	-	-	-	-	-	-	ECSSB3
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	ECSSB3
ECAP8040B	ECGU8040B	-	ECTT8040B	-	-	-	-	ECSSB2
ECAP8060B	ECGU8060B	-	ECTT8060B	ECKIT80B	ECCPB	-	-	ECSSB2
ECAP8080B	ECGU8080B	-	ECTT8080B	-	-	-	-	ECSSB3
-	-	-	-	-	-	-	-	-
ECAP10040B	ECGU10040B	-	ECTT10040B	-	-	-	-	ECSSB2
ECAP10060B	ECGU10060B	-	ECTT10060B	ECKIT100B	ECCPB	ECKIT100A	ECKIT100C	ECSSB2
ECAP10080B	ECGU10080B	-	ECTT10080B	-	-	-	-	ECSSB3
-	-	-	-	-	-	-	-	-
ECAP12040B	ECGU12040B	-	ECTT12040B	-	-	-	-	ECSSB2
ECAP12060B	ECGU12060B	-	ECTT12060B	ECKIT120B	ECCPB	ECKIT120A	ECKIT120C	ECSSB2
ECAP12080B	ECGU12080B	-	ECTT12080B	-	-	-	-	ECSSB3
ECAP15060B	ECGU15060B	-	ECTT15060B	ECKIT150B	ECCPB	ECKIT150A	ECKIT150C	ECSSB3
ECAP20060B	ECGU20060B	-	ECTT20060B	-	-	-	-	ECSSB3
ECAP20080B	ECGU20080B	-	ECTT20080B	-	-	-	-	ECSSB3

The trunkings are supplied in the standard length of 2 mt ± 5 mm.