


Spule, Serie C01

- Form A
- Spulenbreite 30 mm
- Leistungsaufnahme DC 2.1-6.2 W
- Halteleistung AC 4.2-8 VA
- Einschaltleistung AC 6.9-11.5 VA

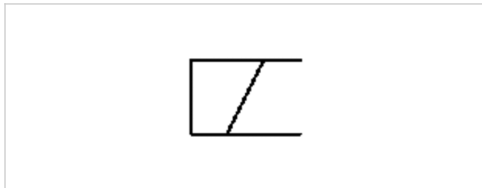

Norm elektr. Anschluss	EN 175301-803, Form A
Elektrische Anschlüsse	Stecker, 3-polig
Umgebungstemperatur min./max.	50 °C
Schutzart mit Ventilsteckverbinder / Stecker	IP65
Einschaltdauer ED	100 %
Gewicht	Siehe Tabelle unten

Technische Daten

Materialnummer	Betriebsspannung	Betriebsspannung	Betriebsspannung	Spannungstoleranz
	DC	AC 50 Hz	AC 60 Hz	DC
5420507012	12 V	-	-	-10% / +10%
5420507022	24 V	-	-	-10% / +10%
5428457022	-	24 V	24 V	-
5420507032	48 V	-	-	-10% / +10%
5428457072	-	110 V	110 V	-
5428457112	-	240 V	240 V	-
5420897022	24 V	-	-	-10% / +10%
5428117022	-	24 V	24 V	-
5428117072	-	110 V	110 V	-
5428117082	-	230 V	230 V	-
1824210222	12 V	24 V	24 V	-10% / +10%
1824210223	24 V	-	-	-10% / +10%
1824210221	-	110 V	110 V	-
1824210220	110 V	220 V	230 V	-10% / +10%

Materialnummer	Spannungstoleranz	Spannungstoleranz	Leistungsaufnahme	Halteleistung
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
5420507012	-	-	2.1 W	-
5420507022	-	-	2.1 W	-
5428457022	-20% / +10%	-10% / +20%	-	4.2 VA

Materialnummer	Spannungstoleranz	Spannungstoleranz	Leistungsaufnahme	Halteleistung
	AC 50 Hz	AC 60 Hz	DC	AC 50 Hz
5420507032	-	-	2.2 W	-
5428457072	-20% / +10%	-10% / +20%	-	4.2 VA
5428457112	-20% / +10%	-10% / +20%	-	4.2 VA
5420897022	-	-	2.7 W	-
5428117022	-20% / +10%	-10% / +20%	-	5.2 VA
5428117072	-20% / +10%	-10% / +20%	-	4.8 VA
5428117082	-20% / +10%	-10% / +20%	-	5.6 VA
1824210222	-10% / +10%	-10% / +10%	6.2 W	7.4 VA
1824210223	-10% / +10%	-10% / +10%	4.4 W	-
1824210221	-10% / +10%	-10% / +10%	-	8 VA
1824210220	-10% / +10%	-10% / +10%	6 W	8 VA

Materialnummer	Halteleistung	Einschaltleistung	Einschaltleistung	Kompatibilitätsindex
	AC 60 Hz	AC 50 Hz	AC 60 Hz	
5420507012	-	-	-	13
5420507022	-	-	-	13
5428457022	3.2 VA	6.9 VA	5.6 VA	13
5420507032	-	-	-	13
5428457072	3.2 VA	6.9 VA	5.8 VA	13
5428457112	3.2 VA	6.9 VA	5.8 VA	13
5420897022	-	-	-	14
5428117022	3.9 VA	-	-	14
5428117072	3.6 VA	-	-	14
5428117082	4.2 VA	-	-	14
1824210222	5.2 VA	11.5 VA	9.5 VA	15
1824210223	-	-	-	15
1824210221	6.4 VA	11.5 VA	10.8 VA	15
1824210220	9.1 VA	11.5 VA	12.6 VA	15

Materialnummer	Gewicht
5420507012	0.096 kg
5420507022	0.096 kg
5428457022	0.096 kg
5420507032	0.096 kg
5428457072	0.096 kg
5428457112	0.096 kg
5420897022	0.096 kg
5428117022	0.096 kg
5428117072	0.096 kg
5428117082	0.096 kg
1824210222	0.11 kg
1824210223	0.11 kg
1824210221	0.11 kg
1824210220	0.11 kg

Technische Informationen


Werkstoff

Gehäuse

Thermoplastisches Elastomer

Abmessungen

Abmessungen

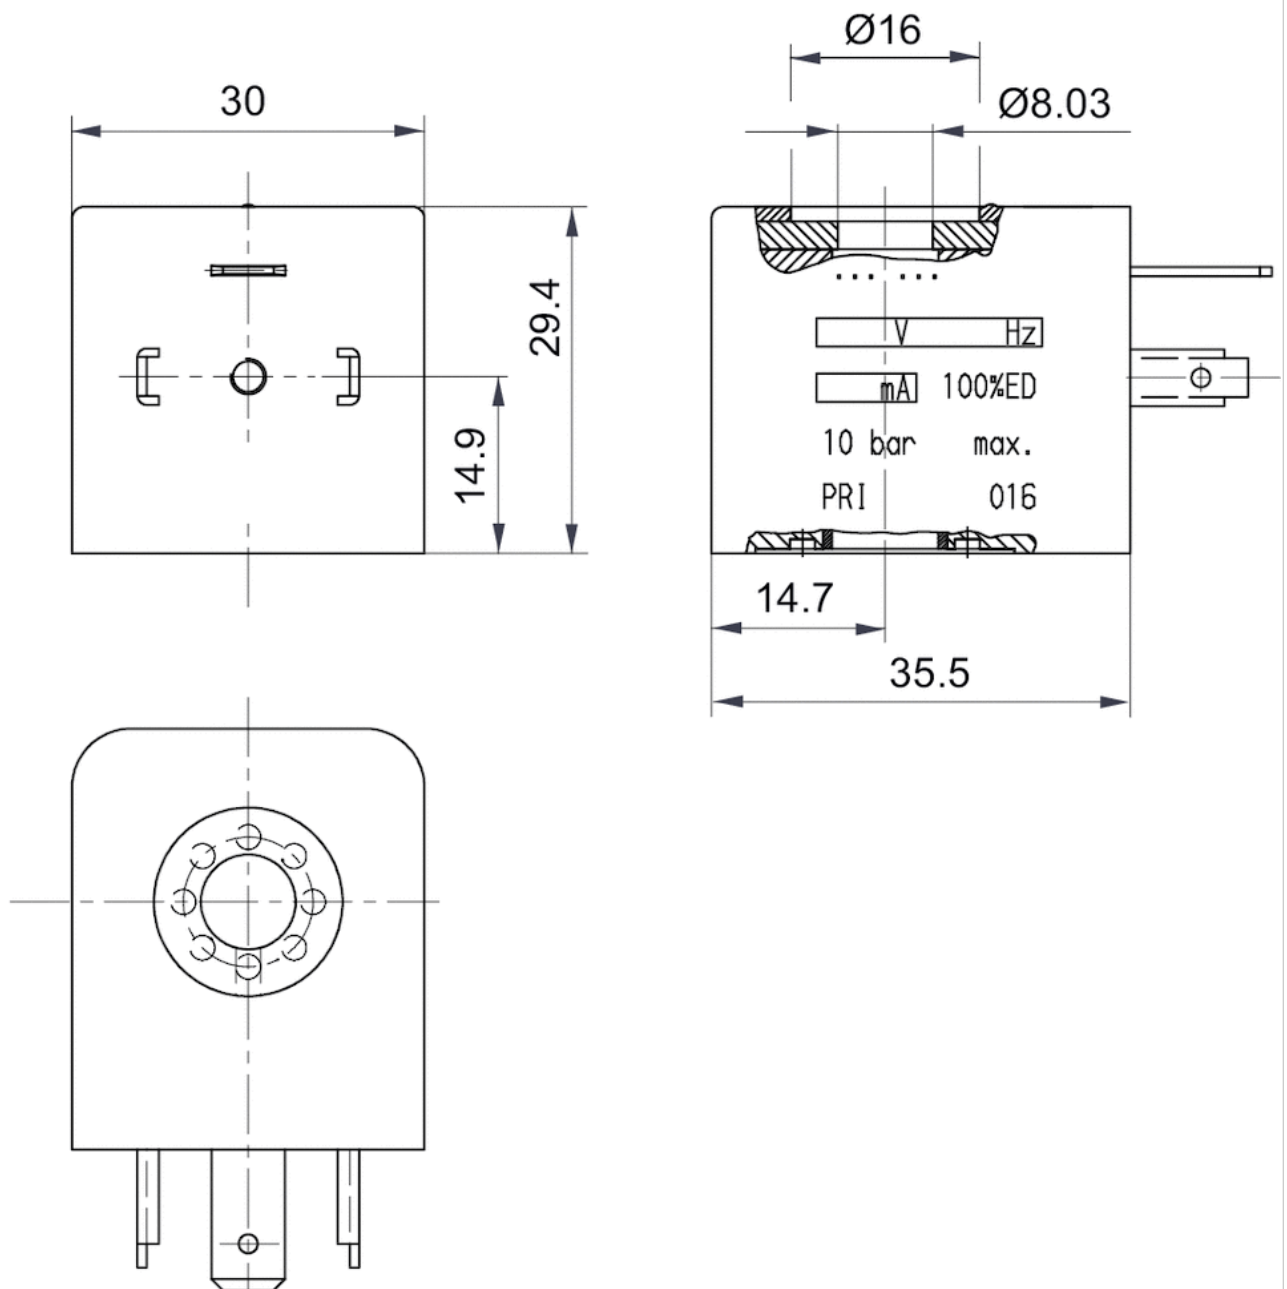

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



[Emerson.com](https://www.emerson.com)



[Facebook.com/EmersonAutomationSolutions](https://www.facebook.com/EmersonAutomationSolutions)



[LinkedIn.com/company/Emerson-Automation-Solutions](https://www.linkedin.com/company/Emerson-Automation-Solutions)



[Twitter.com/EMR_Automation](https://twitter.com/EMR_Automation)

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™