


Plain copper stranded wire

Structure: CEI EN 60228 (class 2)
IEC 60228

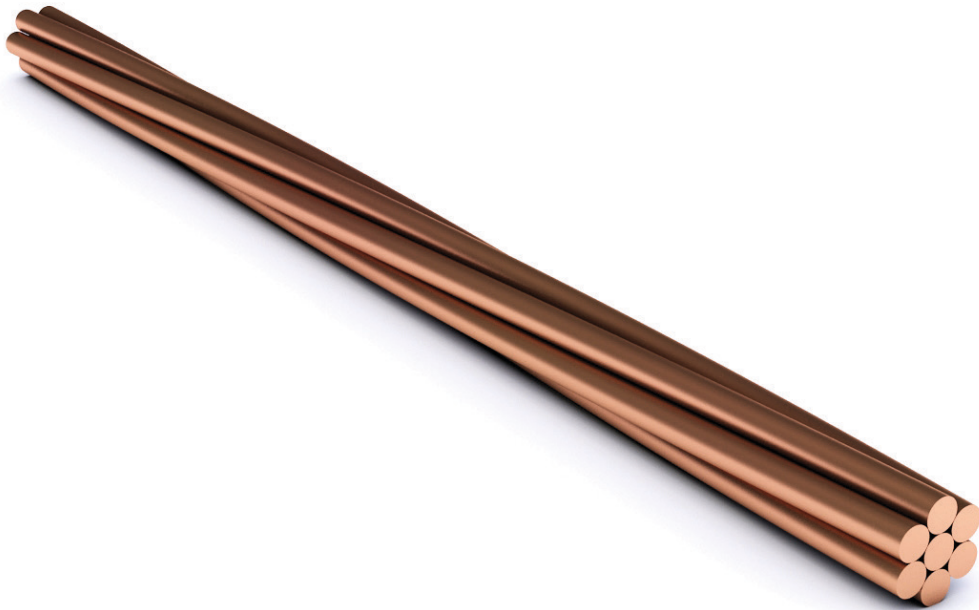

Description

- Conductor: plain copper wire, stranded compacted, class 2. Product obtained by working of annealed copper wire obtained from wire rod copper type Cu-ETP1 UNI EN 1977.

Use

For ground systems.

Formation	Number of wire	Approx. conductor Ø	Max. electrical resistance at 20°C	Approx. cable weight
mm ²	mm	mm	Ω/km	kg/km
10	7	3,85	1,83	85
16	7	4,70	1,15	135
25	7	5,95	0,727	213
35	7	7,00	0,524	296
50	10	7,90	0,387	406
70	14	9,70	0,268	580
95	19	11,50	0,193	810
120	24	12,90	0,153	1025
150	30	14,20	0,124	1250
185	38	16,00	0,0991	1590
240	48	18,50	0,0754	2060