


PNOZ X9P 24DC 24-240VACDC 7no 2nc 2so

777606

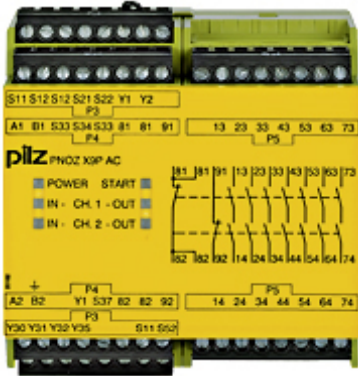

Safety relay (standalone) Inputs: 1-/2-channel wiring with/without detection of shorts across contacts Outputs: 7 N/O, 2 N/C, 2 semiconductor. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in terminals of screw type Monitoring E-STOP, safety gates.

Accessori opzionali



374281

PNOZ X Set plug in screw terminals P3+P4



374282

PNOZ X Set plug in screw terminals P5+P5