


PNOZ X10.11P 24VDC 6n/o 4n/c 6LED

777750

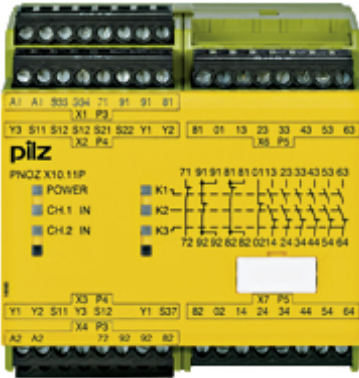

Safety relay (standalone) Inputs: 1-/2-channel wiring with/without detection of shorts across contacts Outputs: 6 N/O, 4 N/C. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in terminals of screw type Monitoring E-STOP, safety gates. Sideways compatibility with PNOZ X10.1.

Accessori opzionali



374281

PNOZ X Set plug in screw terminals P3+P4



374282

PNOZ X Set plug in screw terminals P5+P5