


## PZE X4VP4 C 24VDC 4n/o

787586

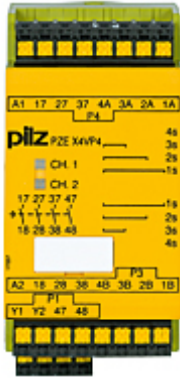

Contact expansion Inputs: Single-channel wiring Outputs: 4 N/O (t = 1, 2, 3, 4 s fixed). UB 24 V DC, width: 45 mm, plug-in spring-loaded terminals. Contact block for contact contact expansion in connection with safety-related control components..

## Accessori opzionali



374290

PNOZ X Set spring loaded terminals P1+P2



374291

PNOZ X Set spring loaded terminals P3+P4