


PMUT X1P C 24VDC 3n/o 1n/c 5so

788010

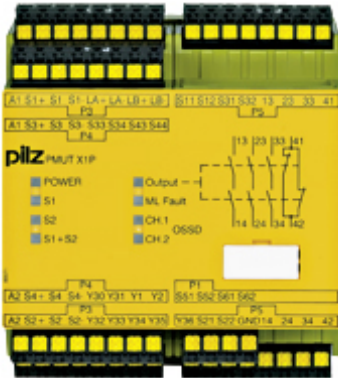

Safety relay (standalone) Inputs: 2-channel wiring with/without detection of shorts across contacts 4 muting sensors. Outputs: 3 N/O, 1 N/C, 5 semiconductor. Automatic/monitored start UB 24 V DC, width: 90 mm, plug-in spring-loaded terminals Device for the temporary suspension of safety functions, muting, monitoring of muting lamps and their automatic switching.

Accessori opzionali



374290

PNOZ X Set spring loaded terminals P1+P2



374291

PNOZ X Set spring loaded terminals P3+P4



374292

PNOZ X Set spring loaded terminals P5+P5