
## Reflectors, Fibers, Optics BOS R-7-0,25 Order Code: BAM00WF



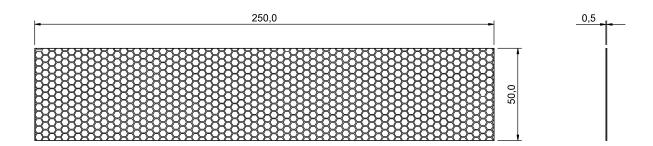

| Environmental conditions |   | Mechanical data |   |
|--------------------------|---|-----------------|---|
| Ambient temperature      | -2060 °C                                  | Dimension       | 50 x 250 x 0.5 mm                             |
|                          |   | Mounting        | Self-adhesive                                 |
| General data             |   | Sensing surface | 125.0 cm <sup>2</sup>                         |
| Use                      | for photoelectric retroreflective sensors | Optical data    |   |
| Version                  | Reflective foil, micro-pyramids           | Light type      | non-polarized light, also for polarized light |
| Material                 |   |                 |   |
| Housing material         | Film                                      |                 |   |
| Material sensing surface | PMMA                                      |                 |   |
| Remarks                  |   |                 |   |

The degree of reflection is at maximum for vertical light infall.

Possible deviations in the reflector structure have no effect on function.