



Main

| | |
|------------------------------------|----------------------------------|
| Range of Product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / Separate Part Type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|--------------------------------------|
| Electrical connection | Elbowed female connector M12, 3 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | 2 PNP LEDs |
| Cable length | 6.56 ft (2 m) |
| Cable outer diameter | 0.18 in (4.6 mm) |
| Cable composition | 3 x 0.25 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 30 V AC 36 V DC |
| Line Rated Current | 3 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.20 lb(US) (0.09 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection | IP67 IP65 |
| Product Certifications | cULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient Air Temperature for Storage | -13...176 °F (-25...80 °C) |

Ordering and shipping details

| | |
|-------------------|----------------------|
| Category | 22483-MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 3389119073622 |
| Returnability | No |
| Country of origin | PL |

Packing Units

| | |
|------------------------------|-----------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 0.79 in (2 cm) |
| Package 1 Width | 7.09 in (18 cm) |
| Package 1 Length | 7.09 in (18 cm) |
| Package 1 Weight | 2.68 oz (76 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 40 |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 7.23 lb(US) (3.28 kg) |


Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

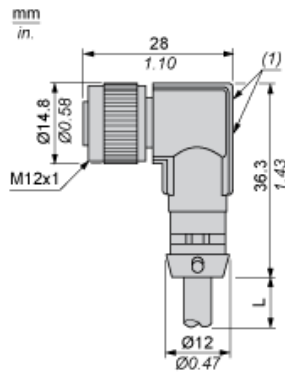

- L : Length of cable
- (1) 2 LEDs limited to 10...30 VDC max.

Connections and Schemes


Connector



BU : Blue
BN : Brown
BK : Black

Connections and Schemes

LED Connection



BN : Brown
BK : Black
BU : Blue
GN : Green
YW : Yellow
(1) Signal