MAXIMUM HORSEPOWER RATINGS					MOUNTING DEPTH
AC SYSTEMS VOLTS (MOTOR VOLTS)				DC USING 2 POLES 250V MAX.	15.87-19.00 INCHES
208 (200)	240 (230)	480 (460)	600 (575)	50	
75	125	250	350		

MOUNTING DEPTH MEASURED FROM SWITCH MOUNTING SURFACE TO SURFACE OF FLANGE

OPERATING HANDLES 9422-A7 OR A8 IS TO BE USED WITH THIS DISCONNECT SWITCH 9422-TG2.

9422-TG-2 DISCONNECT SWITCH IS:
FUSIBLE AND ADJUSTABLE DEPTH.
ADJUSTABLE IS STEPS OF 0.63 INCHES.
RIGHT HAND FLANGE MOUNTED ONLY.

DIMENSION X	FUSE TYPE
3.97 [101]	CLASS H 400A, 600V
6.97 [177]	CLASS H 400A, 250V
8.38 [213]	CLASS J, 400A, 600V

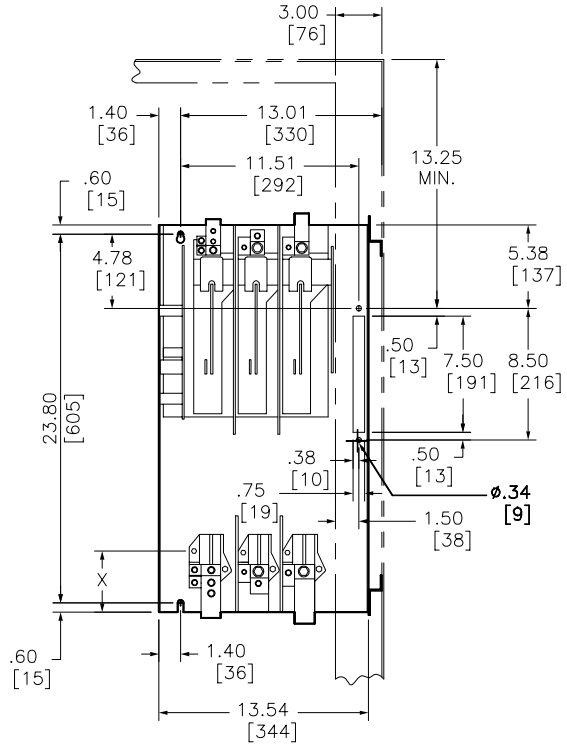

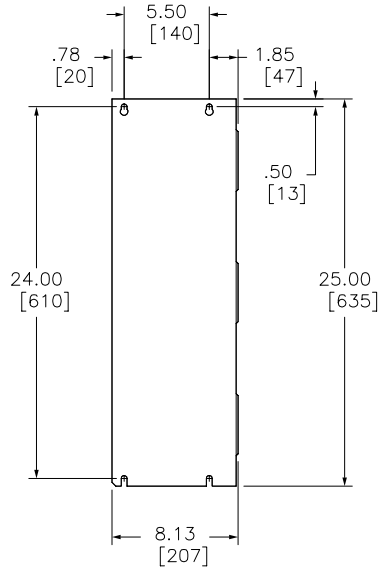

Catalog Number:	9422-TG2
Ratings:	400A
UL File/CCN:	E52369/WHTY2
CSA File/Class:	LR44199/4652 04
Meets Standards:	-
Weight:	63 lbs
Wire Size:	#4-500 KcmiL Cu
Terminal torque:	-
Mounting Hwd.:	(6) 5/16-18 screws

"THE SQUARE D COMPANY HAS PROPRIETARY RIGHTS TO THE INFORMATION CONTAINED HEREON. THIS INFORMATION REMAINS THE PROPERTY OF SQUARE D COMPANY AND MAY BE USED ONLY IN CONFORMANCE WITH INSTRUCTIONS ISSUED BY SQUARE D COMPANY. USER SHOULD VERIFY DRAWINGS ARE TO THE LATEST/CURRENT REVISION PRIOR TO INCORPORATING IN A DESIGN FILE."

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

THIRD ANGLE PROJECTION

TOLERANCES
UNLESS OTHERWISE SPECIFIED
2 PLACE DECIMALS ± .01

FUSIBLE DISCONNECT SWITCH
CLASS 9422 TYPE TG2

SQUARE D COMPANY

DWG# NO. 9422 TG_OUTLINE_002