# RXZE2M114

Zelio, plugin relay socket, mixed contact, 10 A, 250 V, screw clamp, for RXM2 or RXM4 relays





#### Main

Range of Product	Harmony Electromechanical Relays Harmony Timer Relays
Product or Component Type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay RXM 4 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

## Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Screw clamp terminals, 1 x 0.251 x 1 mm² AWG 22AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.252 x 1 mm² AWG 22AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.51 x 1.5 mm² AWG 20AWG 16) solid without cable end Screw clamp terminals, 2 x 0.52 x 1.5 mm² AWG 20AWG 16) solid without cable end
Tightening torque	< 1 N.m M3
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.18 in (30 mm)
Net Weight	0.11 lb(US) (0.048 kg)

#### Environment

[Uimp] rated impulse withstand voltage	4 kV	
Overvoltage category	III	
Pollution degree	3	
Standards	IEC 61984	
Product Certifications	UL CSA Lloyd's	
Ambient Air Temperature for Storage	-40185 °F (-4085 °C)	
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)	
IP degree of protection	IP20 conforming to EN/IEC 60529	
Dielectric strength	2500 V	

## Ordering and shipping details

21128-ZELIO ICE CUBE RELAY ACCESSORIES
CP2
3389119404242
Yes
CN

# Packing Units

PCE
1
1.53 in (3.896 cm)
1.18 in (3.005 cm)
3.24 in (8.218 cm)
1.83 oz (52.0 g)
BB1
10
2.91 in (7.4 cm)
3.46 in (8.8 cm)
5.91 in (15.0 cm)
1.37 lb(US) (0.621 kg)
S03
200
11.81 in (30.0 cm)
11.81 in (30.0 cm)
15.75 in (40.0 cm)
26.13 lb(US) (11.851 kg)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <sup>™</sup> EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

#### Contractual warranty

on a sound of the		
Warranty	18 months	

### **Dimensions**

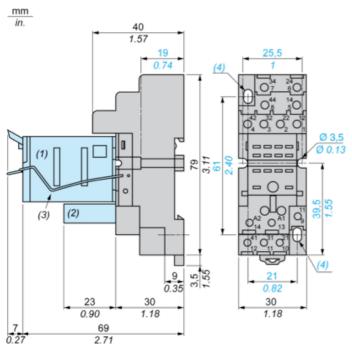

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes Ø 3.5 mm x 6.5 mm / Ø 0.13 in. x 0.25 in.

# Wiring Diagram

