Product End of Life Instructions

PowerPact H-frame Molded Case Circuit Breaker with Thermalmagnetic Trip Unit






.Internal



🛕 DANGER / PELIGRO / DANGER / 危险					
HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH	PELIGRO DE DESCARGA ELÉCTRICA, EXPLOSIÓN O DESTELLO POR ARQUEO	RISQUE D'ÉLECTROCUTION, D'EXPLOSION OU D'ÉCLAIR D'ARC Installez le disjoncteur de sorte qu'une	可能有触电、爆炸或电弧灼 伤的危险		
Install circuit breaker so minimum clearance distance to grounded metal is maintained.	Instale el interruptor automático de manera que se conserve la distancia mínima de espacio libre a las partes metálicas conectadas a tierra.	distance d'isolement minimale avec le métal mis à la terre soit maintenue.	安装断路器的最小间隙应保 留接地金属的空间。		
Failure to follow these instructions will result in death or serious injury.	El incumplimiento de estas instrucciones podrá causar la muerte o lesiones serias.	Si ces directives ne sont pas respectées, cela entraînera la mort ou des blessures graves.	不遵循上述说明将导致人员 伤亡。		

Solution State State

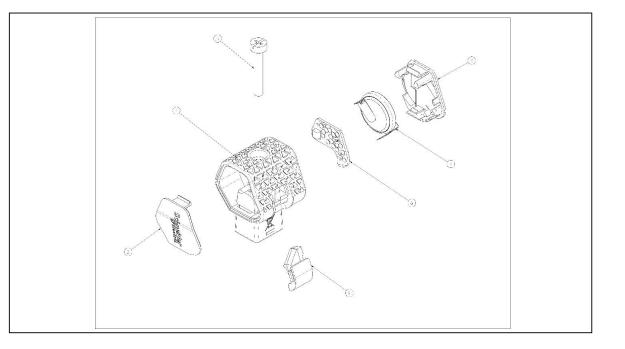

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be dismantled	6	Electronic Board (Communication) > 10cm ²	2.52	PCBA
To be dismantled	7	Battery	2	Litnium ivianganese Dioxide- Rutton

Product description

Manufacturer identification	Schneider Electric United States	
Brand name	SQUARE D	
Product function	This product with thermal-magnetic Trip Unit is designed to protect electrical systems from damage caused by overloads and short circuits.	
Product reference	HDL36150	
Total representative product mass	1518 g	
Representative product dimensions	163 mm x 104mm x 111 mm	
Accessories	No	
Date of information release	07/2022	

(1) Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	53%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric United States Country Customer Care Center https://www.se.com/us/en/work/support/contacts.jsp +1 8773425173 North American Division, Boston One Campus 800 Federal Street MA 01810, Andover, USA

www.se.com

ENVEOLI2206027_V1

Published by Schneider Electric © 2019 - Schneider Electric – All rights reserved

07/2022