




FRONT VIEW

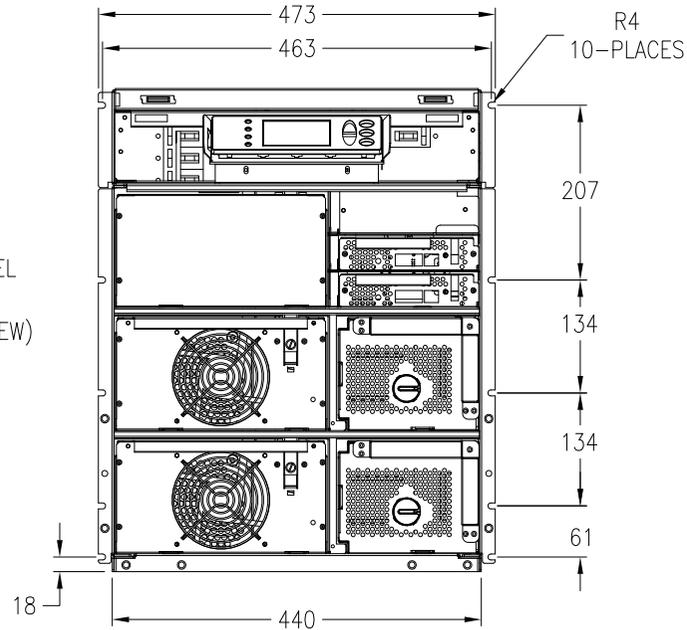

FRONT VIEW
(DOOR REMOVED)

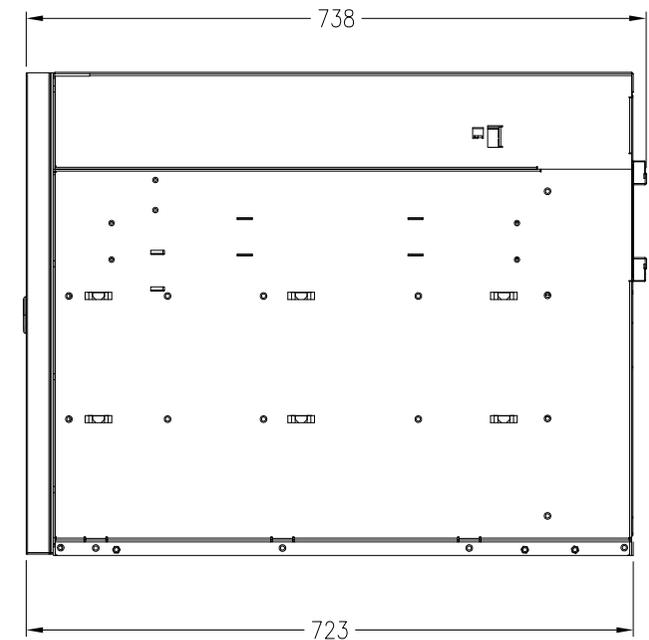

VIEW-B

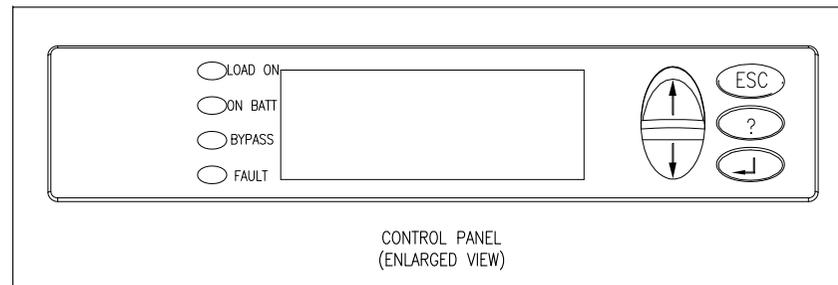

CONTROL PANEL
(ENLARGED VIEW)

NOTES:

1. INSTALLATION MUST COMPLY WITH NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED.
4. NET WEIGHT OF THE UNIT IS 178 kg.
5. CABLE ENTRY IS REAR SIDE OF THE UNIT.
6. AIRFLOW AND SERVICE REQUIREMENTS, AS WELL AS MINIMUM CLEARANCE TO FIRE SUPPRESSION SYSTEMS SHOULD BE CONSIDERED WHEN LOCATING THE UNIT.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SYMMETRA LX 8kVA RACKMOUNT
220/230/230VAC(1PH+N+G) 50/60Hz OR
380/400/415VAC(3PH+N+G) 50/60Hz INPUT
220/230/240VAC, 50/60Hz OUTPUT
MAIN MECHANICAL

DWG NO: SYA8K8RMI-MM

REV. 1



DRAWN: K.NAGENDRA 07-AUG-09

ENGINEER: K.WHITE 07-AUG-09

APPROVED: N.WHITING 07-AUG-09


ANGLE PROJECTION
N.A

PROJECT: SUBMITTAL DRAWINGS SHEET 1 OF 3

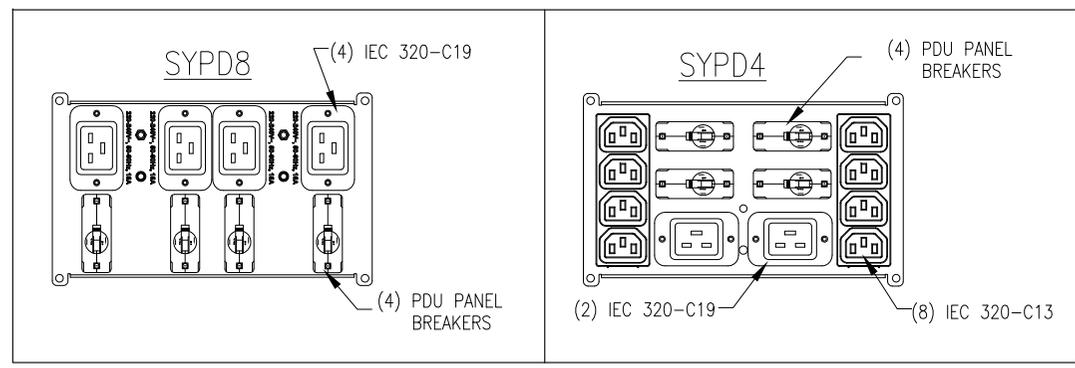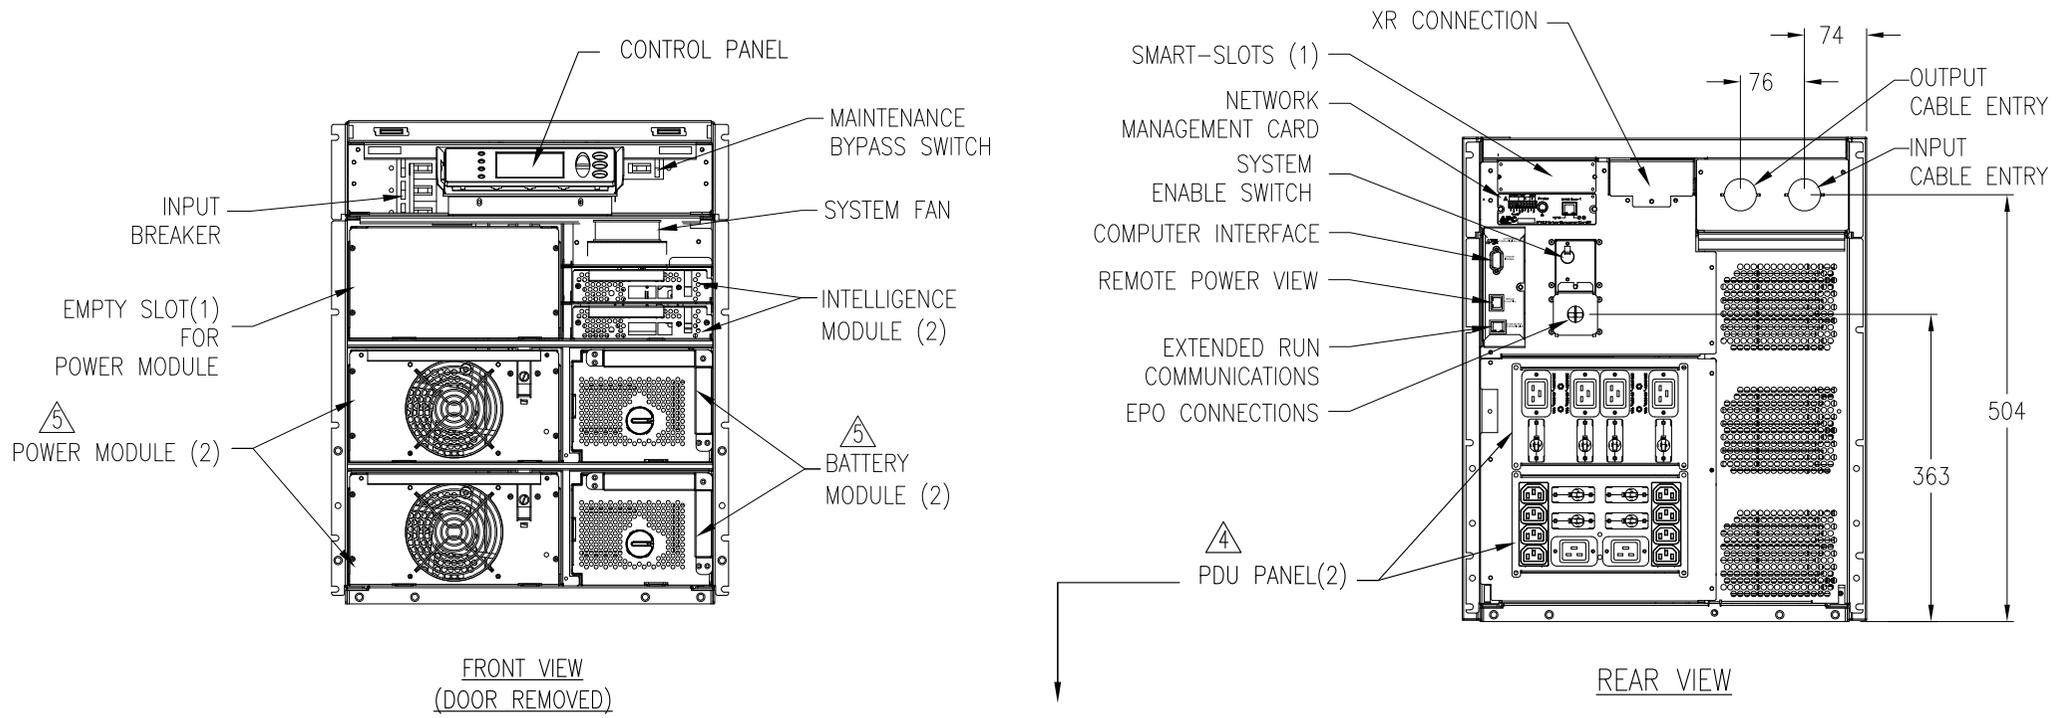


- NOTES:**
1. INSTALLATION MUST COMPLY WITH NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
 3. ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED.

- △ 4. TWO (2) SYMMETRA LX PDU PANELS ARE PRE-INSTALLED, PROVIDING SIX (6) IEC 320 C19 AND EIGHT (8) IEC 320 C13 OUTLETS. ALTERNATIVE PANELS CAN BE PURCHASED SEPARATELY AND INSTALLED.
- △ 5. THE SYMMETRA LX, SKU NUMBER SYA8K8RMI, IS SHOWN IN A NON-REDUNDANT CONFIGURATION, HAVING TWO (2) POWER MODULES (SYPM4KI) AND TWO (2) BATTERY MODULES (SYBT5), PROVIDING UP TO 8KVA POWER. A FURTHER POWER MODULE (SYPM4KI) CAN BE PURCHASED SEPARATELY AND INSTALLED IN THE SYSTEM, PROVIDING REDUNDANCY.

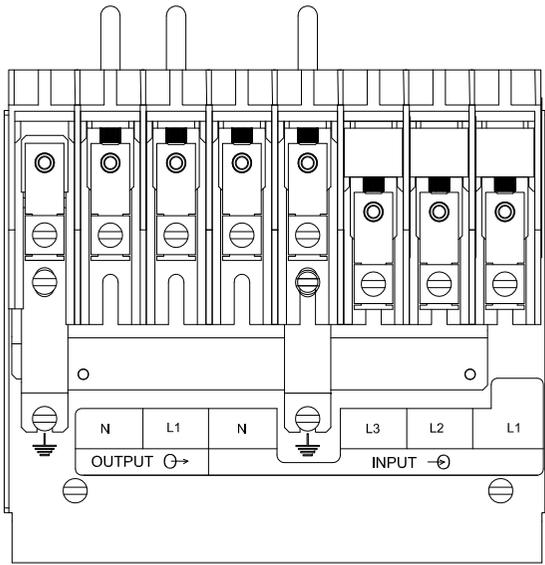


TOP VIEW (ENLARGED)
INPUT/OUTPUT CONNECTIONS

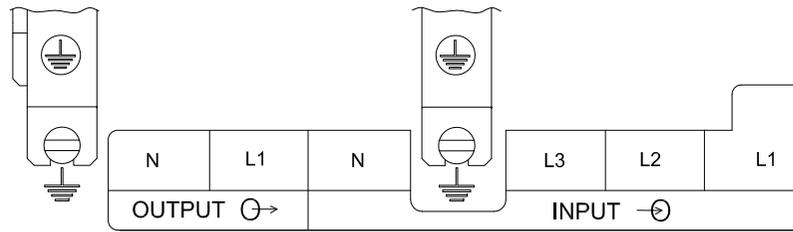


INPUT/OUTPUT CONNECTIONS

TOP VIEW
INPUT/OUTPUT CONNECTIONS
(REFER ENLARGED VIEW)

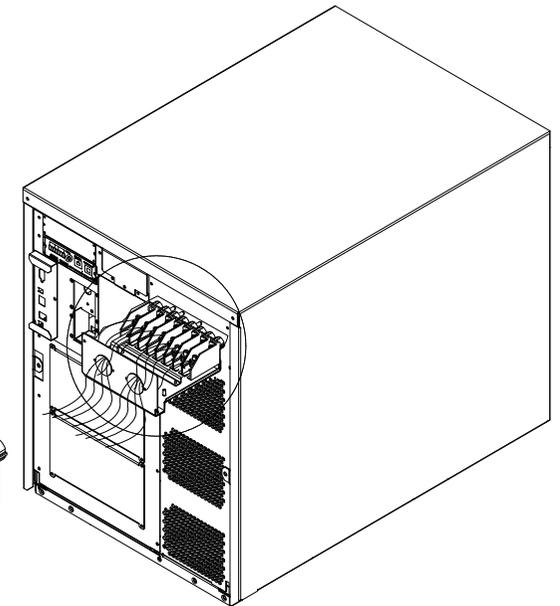


REAR VIEW
DISTRIBUTION PANEL DETAILS,
TOP AND SIDE HOLES NOT SHOWN


IF REQUIRED: Connect the Remote Emergency Power Off (REPO) circuit on the UPS

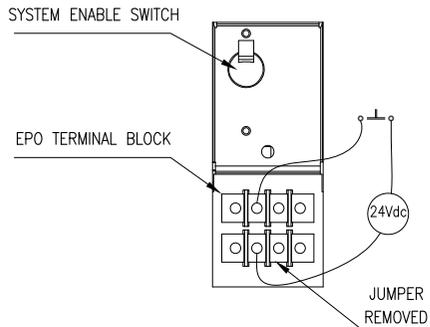

IF INSTALLATION USES
A SWITCH CONTACT
AND A 24Vdc POWER SUPPLY
EXTERNAL TO THE UPS

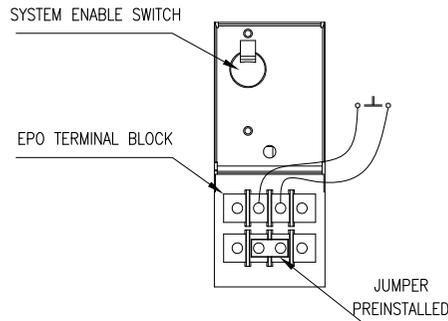

IF INSTALLATION USES
SINGLE EXTERNAL
SWITCH CONTACT.

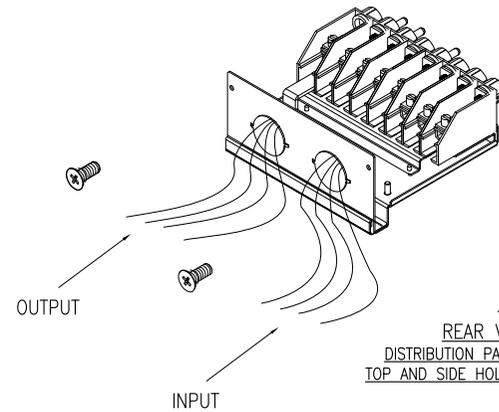

NOTES:

1. INSTALLATION MUST COMPLY WITH NATIONAL, STATE AND LOCAL ELECTRICAL REGULATIONS.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: SYMMETRA LX 8kVA RACKMOUNT
220/230/230VAC(1PH+N+G) 50/60HZ OR
380/400/415VAC(3PH+N+G) 50/60HZ INPUT
220/230/240VAC, 50/60HZ OUTPUT
UPS IN-OUT AND EPO CONNECTIONS

PROJECT: SUBMITTAL DRAWINGS SHEET 3 OF 3

DWG NO: SYA8K8RMI-ME2

DRAWN:	K.NAGENDRA	07-AUG-09
ENGINEER:	K.WHITE	07-AUG-09
APPROVED:	N.WHITING	07-AUG-09

REV. 1
ANGLE PROJECTION
N.A.