



Main

| | |
|------------------------------------|------------------------|
| Range of Product | Lexium 32i |
| Product or Component Type | Connector module |
| Accessory / separate part category | Connection accessories |
| Electrical Connection | Industrial connector |

Complementary

| | |
|---------------------------------------|--|
| Product compatibility | Control unit LXM32i EtherCAT Control unit LXM32i Profinet |
| Accessory / separate part destination | Motor BMI with control unit Lexium 32i |
| Range Compatibility | Lexium 32i |
| Communication interface | EtherCAT Profinet |
| Input/output type | 2 discrete outputs 4 discrete inputs |
| Discrete input logic | Sink |
| Net Weight | 0.49 lb(US) (0.22 kg) |

Ordering and shipping details

| | |
|-------------------|------------------------------------|
| Category | 18289-LEXIUM INTEGRATED DRIVES ACC |
| Discount Schedule | PC56 |
| GTIN | 3606481274243 |
| Returnability | No |

Packing Units

| | |
|------------------------------|-------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.23 in (8.2 cm) |
| Package 1 Width | 4.53 in (11.5 cm) |
| Package 1 Length | 6.54 in (16.6 cm) |
| Package 1 Weight | 7.76 oz (220 g) |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 1 |
| Package 2 Height | 3.23 in (8.2 cm) |
| Package 2 Width | 4.53 in (11.5 cm) |
| Package 2 Length | 6.69 in (17 cm) |
| Package 2 Weight | 7.76 oz (220 g) |
| Unit Type of Package 3 | S04 |
| Number of Units in Package 3 | 30 |
| Package 3 Height | 11.81 in (30 cm) |
| Package 3 Width | 15.75 in (40 cm) |


| | |
|------------------|-------------------------|
| Package 3 Length | 23.62 in (60 cm) |
| Package 3 Weight | 16.78 lb(US) (7.611 kg) |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |

Connections and Schema

Connection of I/O Module for CANopen with Industrial Connectors

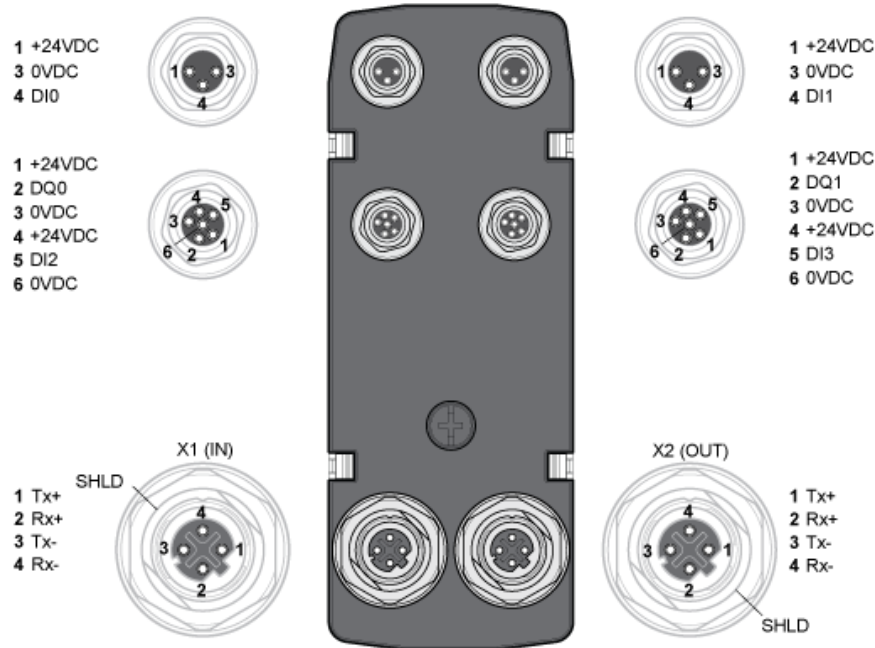

| Signal | Meaning |
|--------|-------------------------------|
| +24VDC | 24 V signal power supply |
| 0VDC | Reference potential to +24VDC |
| DI0 | Digital input 0 |
| DI1 | Digital input 1 |
| DI2 | Digital input 2 |
| DI3 | Digital input 3 |
| DQ0 | Digital output 0 |
| DQ1 | Digital output 1 |
| SHLD | Shield (grounded internally) |
| Tx+ | Ethernet transmit signal + |
| Tx- | Ethernet transmit signal - |
| Rx+ | Ethernet receive signal + |
| Rx- | Ethernet receive signal - |
| NC | Not connected |