

VW3M9208

Connector module, Lexium 32i, connection for industrial connectors, EtherCAT, 2 DI sink, STO



Main

| | |
|------------------------------------|------------------------|
| Range of Product | Lexium 32i |
| Product or Component Type | Connector module |
| Accessory / separate part category | Connection accessories |
| Electrical Connection | Industrial connector |

Complementary

| | |
|---------------------------------------|--|
| Product compatibility | Drive control unit LXM32i EtherCAT |
| Accessory / separate part destination | Motor BMI with drive control unit Lexium 32i |
| Range Compatibility | Lexium 32i |
| Communication interface | EtherCAT |
| Input/output type | 2 discrete inputs |
| Discrete input logic | Sink |
| Safety Function | STO (safe torque off) |
| Net Weight | 0.51 lb(US) (0.23 kg) |

Ordering and shipping details

| | |
|-------------------|------------------------------------|
| Category | 18289-LEXIUM INTEGRATED DRIVES ACC |
| Discount Schedule | PC56 |
| GTIN | 3606480610943 |
| Returnability | No |
| Country of origin | DE |


Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.23 in (8.2 cm) |
| Package 1 Width | 4.53 in (11.5 cm) |
| Package 1 Length | 6.69 in (17.0 cm) |
| Package 1 Weight | 8.11 oz (230.0 g) |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 12 |
| Package 2 Height | 11.81 in (30.0 cm) |
| Package 2 Width | 11.81 in (30.0 cm) |
| Package 2 Length | 15.75 in (40.0 cm) |
| Package 2 Weight | 7.66 lb(US) (3.473 kg) |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Connection of I/O Module for EtherCAT with Industrial Connectors

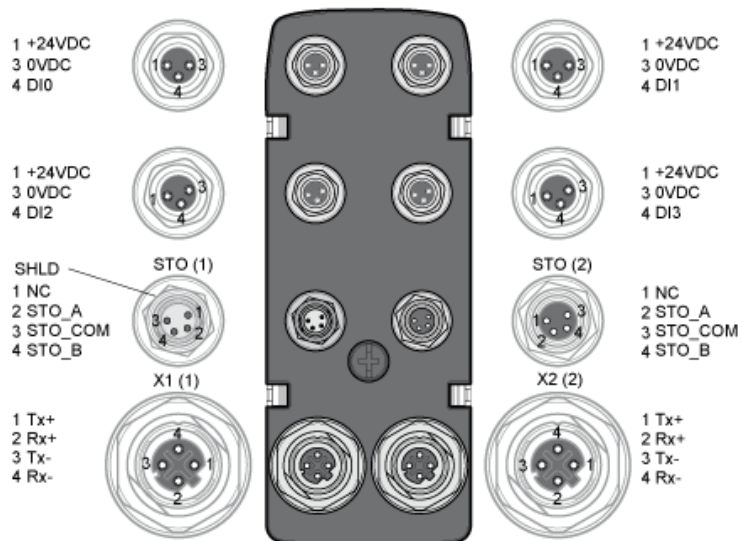

(1) IN
(2) OUT

| Signal | Meaning |
|---------|---|
| +24VDC | 24 V signal power supply |
| 0VDC | Reference potential to +24VDC |
| DI0 | Digital input 0 |
| DI1 | Digital input 1 |
| DI2 | Digital input 2 |
| DI3 | Digital input 3 |
| STO_A | Safety function STO |
| STO_COM | Reference potential for safety function STO |
| STO_B | Safety function STO |
| SHLD | Shield (grounded internally) |
| Tx+ | Ethernet transmit signal + |
| Tx- | Ethernet transmit signal - |
| Rx+ | Ethernet receive signal + |
| Rx- | Ethernet receive signal - |
| NC | Not connected |