

Product data sheet

Characteristics

XZCPA1241L5

Pre wired connectors XZ, elbowed female, M12, 4 pins, cable PVC 5 m



Main

| | |
|------------------------------------|----------------------------------|
| Range of Product | Telemecanique Cabling components |
| Accessory / separate part category | Cabling accessory |
| Accessory / Separate Part Type | Pre-wired connectors |
| Series name | Application |

Complementary

| | |
|--------------------------------|--------------------------------------|
| Electrical connection | Elbowed female connector M12, 4 pins |
| Cable connector fixing | Screw-on |
| Collar material | Stainless steel 316L |
| Status LED | Without |
| Cable length | 16.40 ft (5 m) |
| Cable outer diameter | 0.21 in (5.3 mm) |
| Cable composition | 4 x 0.34 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 250 V AC 300 V DC |
| Line Rated Current | 4 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Net Weight | 0.42 lb(US) (0.19 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP Degree of Protection | IP69K |
| Ambient air temperature for operation | -13...185 °F (-25...85 °C) static |
| Ambient Air Temperature for Storage | -31...212 °F (-35...100 °C) |

Ordering and shipping details

| | |
|-------------------|----------------------|
| Category | 22483-MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 03389119021487 |
| Returnability | Yes |
| Country of origin | CZ |

Packing Units

| | |
|------------------------------|-------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.42 in (3.6 cm) |
| Package 1 Width | 6.06 in (15.4 cm) |
| Package 1 Length | 6.57 in (16.7 cm) |
| Package 1 Weight | 7.65 oz (217 g) |

| | |
|------------------------------|---------------------------|
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 40 |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 20.71 lb(US) (9.393 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 320 |
| Package 3 Height | 29.53 in (75 cm) |
| Package 3 Width | 23.62 in (60 cm) |
| Package 3 Length | 31.50 in (80 cm) |
| Package 3 Weight | 181.10 lb(US) (82.144 kg) |


Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

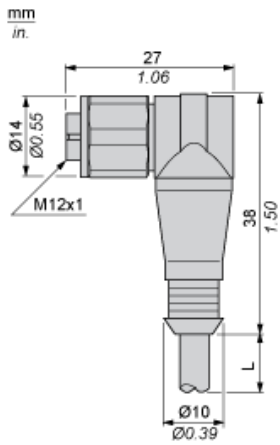

L : Length of cable

Connections and Schemes

Connector



BN : Brown
BK : Black
BU : Blue
WH : White