

Product End of Life Instructions

I-Line I & II Busway Fusible Plug-in Unit




Potential disassembly risks

This product contains plastic parts with brominated flame retardants materials which are recommended to be treated separately during the End of Life operations.

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse --> Depollution --> Dismantling --> Shredding

End of Life Instructions

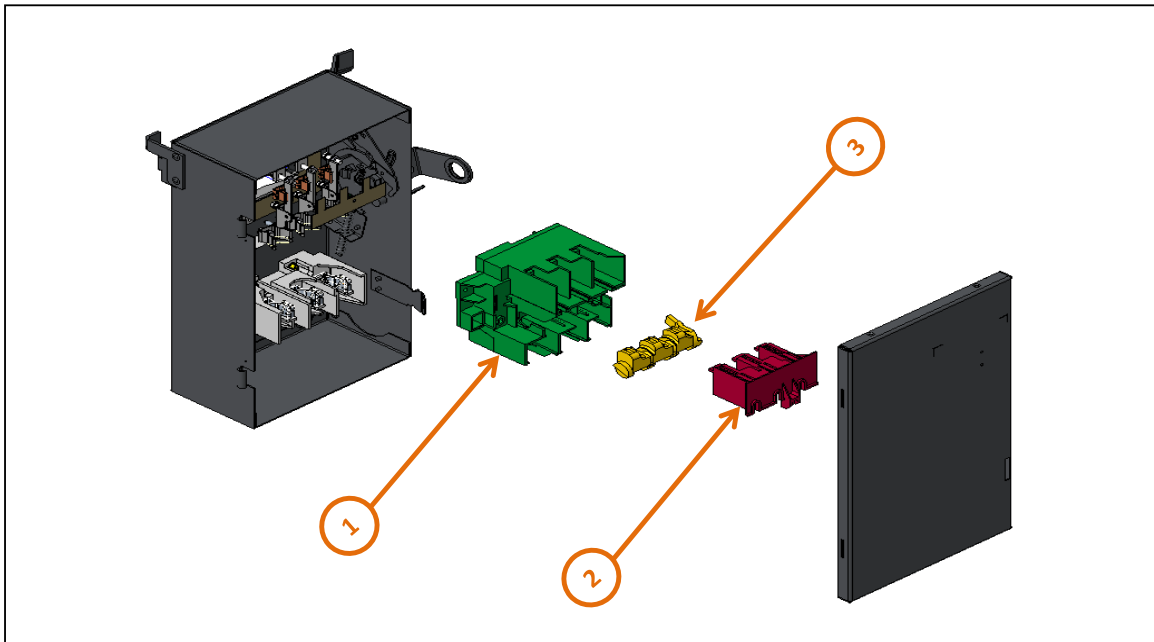

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted		Liquid and pasty substances	As Needed	GREASE
To be depolluted	1	Plastic parts with brominated flame retardants (PBT GF30 FR(17))	367.0	LINE BASE
To be depolluted	2	Plastic parts with brominated flame retardants (PBT GF30 FR(17))	68.5	ARC SUPPRESSOR
To be depolluted	3	Plastic parts with brominated flame retardants (PBT GF30 FR(17))	44.0	CROSS BAR ROTOR



Product description

Manufacturer identification	Schneider Electric United States
Brand name	SQUARE D
Product function	Plug-In units are positioned along the busway run by notches in the busway housing top that accept the mounting hooks of the plug-in unit. All devices incorporate an interlock to prevent the door over the disconnect from being opened when the unit is ON. The main purpose of the I-Line I & II Busway Fusible Plug-in Unit is to serve as the protection and disconnection means for distributing electrical low voltage power from the main I-line Busway run to downstream equipment utilized in both commercial and industrial applications
Product reference	PQ3603G
Total representative product mass	5982 g
Representative product dimensions	400mm x 285mm x 250mm
Accessories	No
Date of information release	11/2020



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	83%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric United States
Country Customer Care Center
<http://www.se.com/us/en/work/support/contacts.jsp>
18773425173
North American Division, Boston One Campus
800 Federal Street
MA 01810, Andover, USA

www.schneider-electric.com

ENVEOLI1407016EN_V2

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

11/2020