

Product End-of-Life Instructions


Phaseo

Product Range

Redundancy module

Marketing Model

ABL8 RED24400

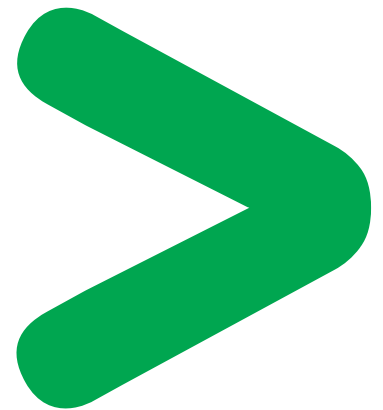

Size in mm:

H x L x D: 146 x 146 x 45

Weight (excluding packaging) in g:

471.9



Schneider
Electric


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy :

Reuse ⇨ **Separation for special treatment** ⇨ **Other dismantling** ⇨ **Shredding**

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

These products contain below printed circuit boards (PCBs), which are recommended to be treated separately during the End of Life operations.

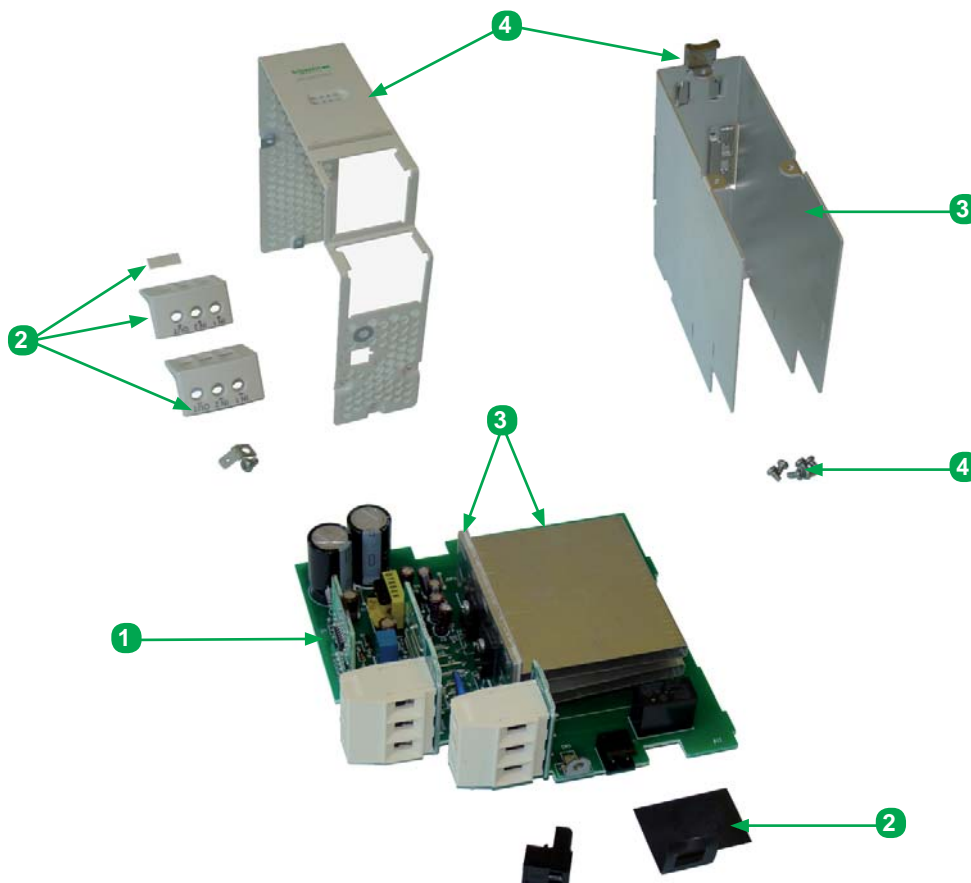

Recommendation	Number on drawing	Components	Weight (g)	Comment
Operating hazards	None	None	–	–
Reuse	None	None	–	–
Special treatment	①	PCBAs	161.5	–
Other dismantling	②	Plastic / Polycarbonate	12.5	–
	③	Aluminium	176.0	–
	④	Steel	116.5	–
	None	Cables and Connectors	–	–

Schneider Electric Industries SAS

35, rue Joseph Monier
CS30323
F - 92506 Reuil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V0.

Publication : Schneider Electric