


# Product data sheet

## Characteristics

# 9999D11

Contact, Definite Purpose, auxiliary contact, 3A at 120 VAC, 1 NO contact and 1 NC contact, for 50A to 90A contactors

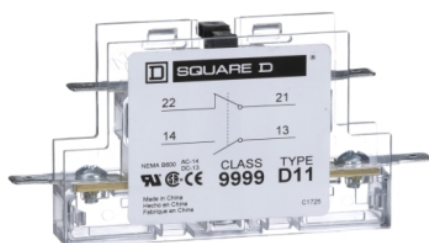

### Main

Product Range	DPA
Component type	Auxiliary Contact Module
Used with	contactor

### Complementary

Auxiliary contact composition	1 NO + 1 NC
Rated breaking capacity	3 A 120 V AC inductive control circuit UL 508 1.5 A 240 V AC inductive control circuit UL 508 0.75 A 480 V AC inductive control circuit UL 508 0.6 A 600 V AC inductive control circuit UL 508 5 A <= 600 V AC resistive control circuit UL 508

### Environment

Product Certifications	UL Recognized CSA
------------------------	----------------------

### Ordering and shipping details

Category	21762-9999 DISCOUNT CP1B
Discount Schedule	CP1B
GTIN	785901080886
Returnability	Yes
Country of origin	CN

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.70 in (1.778 cm)
Package 1 Width	1.80 in (4.572 cm)
Package 1 Length	3.70 in (9.398 cm)
Package 1 Weight	1.44 oz (40.823 g)

### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

---

Warranty

18 months

---