


# Product data sheet

## Characteristics

# 9422ATF22

Operating mechanism, flange mounted, variable depth, 200A, 600 V, no fuse, switch mechanism, 6 inch handle, NEMA 4

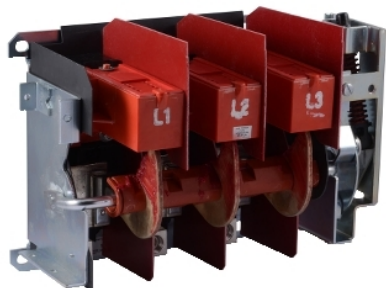

### Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

### Complementary

Mounting Type	Flange rod variable depth
Current Rating	200 A
Horsepower Rating	40 Hp 200 V AC 60 Hp 230 V AC 125 Hp 460 V AC 150 Hp 575 V AC 40 hp 250 V DC
Fuse Rating	200 A 250/600 V
Handle Type	6 in handle included NEMA 4/4X enclosures Stainless Steel
Fuse Type	R H K J

### Environment

Certifications	CSA UL Recognized
----------------	----------------------

### Ordering and shipping details

Category	21732-9422
Discount Schedule	CP1
GTIN	785901059073
Returnability	No
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.00 in (22.86 cm)
Package 1 Width	12.00 in (30.48 cm)
Package 1 Length	21.00 in (53.34 cm)
Package 1 Weight	36.87 lb(US) (16.723 kg)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------