


# 9422ATEF101

Operating mechanism, flange mounted, variable depth, 100A, 600 V, fuseholder, switch mechanism, 6 inch handle, NEMA 4

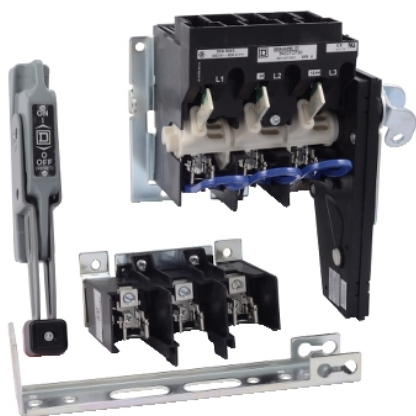

## Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

## Complementary

Mounting Type	Flange rod variable depth
Current Rating	100 A
Horsepower Rating	25 Hp 200 V AC 30 Hp 230 V AC 60 Hp 460 V AC 75 Hp 575 V AC 20 hp 250 V DC
Fuse Rating	100 A 250/600 V
Handle Type	6 in handle included NEMA 1/3/3R/4 enclosures sheet steel
Fuse Type	R H K J

## Environment

Certifications	UL Recognized CSA
----------------	----------------------

## Ordering and shipping details

Category	21732-9422
Discount Schedule	CP1
GTIN	785901872276
Returnability	Yes
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.20 in (18.3 cm)
Package 1 Width	11.30 in (28.7 cm)
Package 1 Length	16.10 in (40.9 cm)
Package 1 Weight	9.72 lb(US) (4.41 kg)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
RoHS exemption information	<a href="#">Yes</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------