

# Product data sheet

## Characteristics

# XZCPA1164L5

Pre wired connectors XZ, elbowed female, M12, 5 pins, cable PVC 5 m



### Main

Range of Product	Telemecanique Cabling components
Accessory / separate part category	Cabling accessory
Accessory / Separate Part Type	Pre-wired connectors
Series name	Application

### Complementary

Electrical connection	Elbowed female connector M12, 5 pins (included earth pin)
Cable connector fixing	Screw-on
Collar material	Stainless steel 316L
Status LED	Without
Cable length	16.40 ft (5 m)
Cable outer diameter	0.22 in (5.7 mm)
Cable composition	5 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	60 V AC 75 V DC
Line Rated Current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net Weight	0.55 lb(US) (0.25 kg)

### Environment

IP Degree of Protection	IP69K
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static
Ambient Air Temperature for Storage	-31...212 °F (-35...100 °C)

### Ordering and shipping details

Category	22483-MACHINE CABLES
Discount Schedule	DS3
GTIN	3389119021517
Returnability	Yes
Country of origin	PL

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.98 in (2.500 cm)
Package 1 Width	7.09 in (18.000 cm)
Package 1 Length	7.09 in (18.000 cm)
Package 1 Weight	6.10 oz (173.000 g)

Unit Type of Package 2	S02
Number of Units in Package 2	20
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	8.32 lb(US) (3.776 kg)


### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

### Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

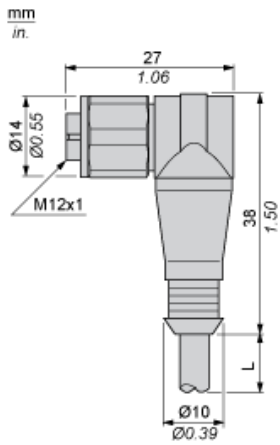


L : Length of cable

---

Connections and Schemes

---

Connectors



BU : Blue  
BN : Brown  
BK : Black  
Y/G : Yellow / Green  
BK/ Black / White  
WH :