# Product data sheet Characteristics

# **HMIDM7421**

# Flat screen, Harmony Modular iPC, Display PC 4:3 15" single touch for HMIBM



Main	
Range of Product	Harmony iPC
Product or Component Type	Flat screen
Terminal type	Touchscreen display
Device mounting	Flush
Product Compatibility	Modular Box PC

#### Complementary

o in promontary				
View angle horizontal x vertical	140 x 115°			
Contrast Ratio	500:1			
Pixel resolution	2048 x 2048			
Touchscreen resolution	2048 x 2048			
Display resolution	1024 x 768 pixels XGA			
Display size	15 inch			
Aspect ratio	4:3			
Display type	LED Colour TFT LCD			
Display colour	16777216 colors			
Luminance	27.87 fc (300 cd/m²)			
Backlight lifespan	50000 hours 77 °F (25 °C)			
Touch panel	Single touch analogue resistive			
Integrated connection type	USB 2.0 type A			
Function Available	Operate with water on screen			
[Us] rated supply voltage	24 V DC power supply 100240 V AC power supply			
Supply voltage limits	1836 V			
Inrush current	8.9 A			
Power consumption in W	53.04 W Box PC HMIBMP) 48.04 W Box PC HMIBMU)			
Local signalling	Status LED			
Depth	Enclosure 1.10 in (28 mm) 0.28 in (7 mm)			
Height	11.42 in (290 mm)			
Width	15.38 in (390.7 mm)			
Net Weight	9.26 lb(US) (4.2 kg)			

#### Environment

Standards	Class I division 2 CSA C22.2 No 213 CSA C22.2 No 142				
	UL 6110-2-201				
	Class I division 2 ANSI/ISA 12-12-01				
Product certifications	EAC				
	ATEX				
	C-tick				
	IEC-Ex				
	Marine GL Bridge				
	CE				
IP degree of protection	IP66				
NEMA degree of protection	NEMA 4X				
Pollution degree	2				
Ambient air temperature for storage	-22158 °F (-3070 °C)				
Relative Humidity	1095 % non-condensing				
Ambient air temperature for operation	32131 °F (055 °C)				
Operating altitude	6561.68 ft (2000 m)				
Vibration resistance	1 gn 5500 Hz) HDD				
	2 gn 5500 Hz) SSD				
	2 gn 5500 Hz) Cfast card				

## Ordering and shipping details

Category	22574-MAGELIS BOX PC AND PANEL PC		
Discount Schedule	MC2		
GTIN	3606480853661		
Returnability	No		
Country of origin	US		


#### **Packing Units**

racking units				
Unit Type of Package 1	PCE			
Number of Units in Package 1	1			
Package 1 Height	9.09 in (23.1 cm)			
Package 1 Width	24.33 in (61.8 cm)			
Package 1 Length	29.13 in (74.0 cm)			
Package 1 Weight	15.98 lb(US) (7.25 kg)			
Unit Type of Package 2	CAR			
Number of Units in Package 2	1			
Package 2 Height	23.03 in (58.5 cm)			
Package 2 Width	8.66 in (22.0 cm)			
Package 2 Length	28.74 in (73.0 cm)			
Package 2 Weight	14.99 lb(US) (6.8 kg)			
Unit Type of Package 3	P12			
Number of Units in Package 3	5			
Package 3 Height	41.34 in (105.0 cm)			
Package 3 Width	31.50 in (80.0 cm)			
Package 3 Length	47.24 in (120.0 cm)			
Package 3 Weight	154.32 lb(US) (70.0 kg)			

#### Offer Sustainability


California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov			
REACh Regulation				
REACh free of SVHC	Yes			
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EEU RoHS  Declaration			
Mercury free	Yes			
China RoHS Regulation	☐ China RoHS Declaration			
RoHS exemption information	€Yes			
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.			

#### **Dimensions**

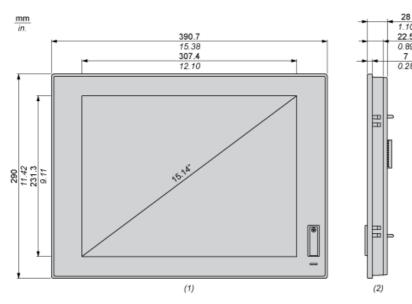

- Front view Right view (1) (2)

### **Spacing Requirements**

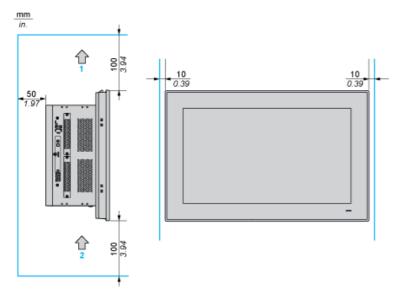


1: Air out 2: Air in

#### **Mounting Orientation**



Panel Cut Dimensions

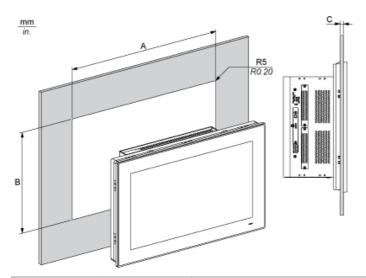

Α		В		С		R	
mm	in.	mm	in.	mm	in.	mm	in.
383.5	15.09	282.5	11.12	26	0.080.23	5	0.20