



Main

Range of Product	Lexium 32i
Product or Component Type	Connector module
Accessory / separate part category	Connection accessories
Electrical Connection	Industrial connector

Complementary

Product compatibility	Control unit LXM32i EtherCAT Control unit LXM32i Profinet
Accessory / separate part destination	Motor BMI with control unit Lexium 32i
Range Compatibility	Lexium 32i
Communication interface	EtherCAT Profinet
Input/output type	4 discrete inputs 2 discrete outputs
Discrete input logic	Source
Net Weight	0.49 lb(US) (0.22 kg)

Ordering and shipping details

Category	18289-LEXIUM INTEGRATED DRIVES ACC
Discount Schedule	PC56
GTIN	3606481274229
Returnability	No

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.23 in (8.2 cm)
Package 1 Width	4.53 in (11.5 cm)
Package 1 Length	6.69 in (17.0 cm)
Package 1 Weight	7.76 oz (220.0 g)
Unit Type of Package 2	S04
Number of Units in Package 2	30
Package 2 Height	11.81 in (30.0 cm)
Package 2 Width	15.75 in (40.0 cm)
Package 2 Length	23.62 in (60.0 cm)
Package 2 Weight	15.43 lb(US) (7.0 kg)


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes
PVC free	Yes

Connections and Schema

Connection of I/O Module for CANopen with Industrial Connectors

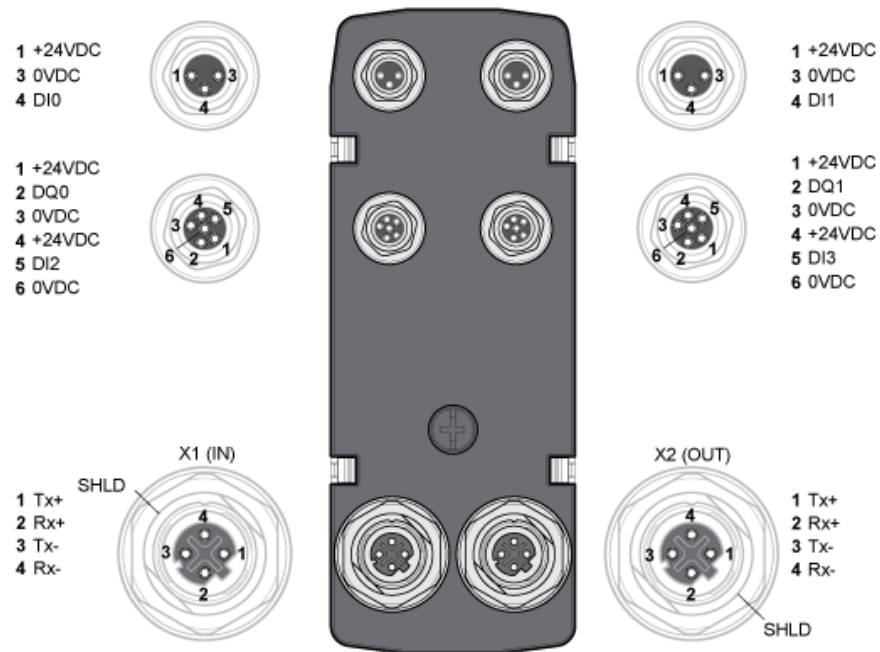

Signal	Meaning
+24VDC	24 V signal power supply
0VDC	Reference potential to +24VDC
DI0	Digital input 0
DI1	Digital input 1
DI2	Digital input 2
DI3	Digital input 3
DQ0	Digital output 0
DQ1	Digital output 1
SHLD	Shield (grounded internally)
Tx+	Ethernet transmit signal +
Tx-	Ethernet transmit signal -
Rx+	Ethernet receive signal +
Rx-	Ethernet receive signal -
NC	Not connected