

XVBC07

Base unit for modular tower lights, Harmony XVB, plastic, black, 70mm, bottom or side cable entry



Main

| | |
|---------------------------|--------------------------------------|
| Range of Product | Harmony XVB Universal |
| Product or Component Type | Base unit |
| Component name | XVBC |
| Material | Glass reinforced polyamide base unit |

Complementary

| | |
|-------------------------------|--|
| Fixing Mode | Direct or tube fixing |
| Mounting diameter | 2.76 in (70 mm) |
| Product destination | Banks without flash discharge tube unit |
| Electrical connection | 1 connector standard input |
| Cable entry | Bottom or side entry |
| Assembly style | Customer assembly, up to 5 units |
| Terminals description ISO n°1 | (COM-2)PW (COM-3)PW (COM-1)PW (GND)GROUND (COM-4)PW (COM-5)PW |
| Net Weight | 0.35 lb(US) (0.16 kg) |

Environment

| | |
|-------------------------------------|---|
| Product Certifications | CCC EAC CSA C22-2 No 14 UL 508 |
| Standards | EN/IEC 60947-5-1 |
| Protective treatment | TC |
| Ambient Air Temperature for Storage | -40...158 °F (-40...70 °C) |
| NEMA degree of protection | Type 4X UL indoor) |

Ordering and shipping details

| | |
|-------------------|-----------------------|
| Category | 22611-XVB-STACKLIGHTS |
| Discount Schedule | XV |
| GTIN | 3389110845037 |
| Returnability | Yes |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.94 in (10 cm) |
| Package 1 Width | 4.72 in (12 cm) |
| Package 1 Length | 3.94 in (10 cm) |
| Package 1 Weight | 6.00 oz (170 g) |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 36 |
| Package 2 Height | 11.81 in (30 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 15.43 lb(US) (7 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 144 |
| Package 3 Height | 17.72 in (45 cm) |
| Package 3 Width | 23.62 in (60 cm) |
| Package 3 Length | 31.50 in (80 cm) |
| Package 3 Weight | 80.47 lb(US) (36.5 kg) |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Indicator Bank with "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

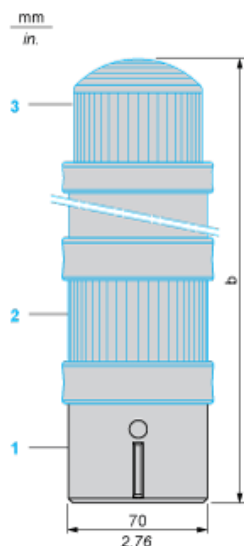


- (1) Base unit
- (2) Illuminated or audible signalling unit XVBC•••, to be ordered separately
- (3) "Flash" unit XVBC•••, to be ordered separately

| Number of illuminated or audible signalling units other than "flash" tube | b in mm | b in in. |
|---|---------|----------|
| 1 | 295 | 11.61 |
| 2 | 358 | 14.09 |
| 3 | 421 | 16.57 |
| 4 | 484 | 19.06 |

Base Unit for Indicator Banks

Panel Cut-out for Direct Fixing

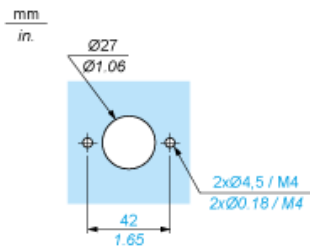

Illuminated Beacon

Wiring Diagram

