



NEMA TYPE 12/3R

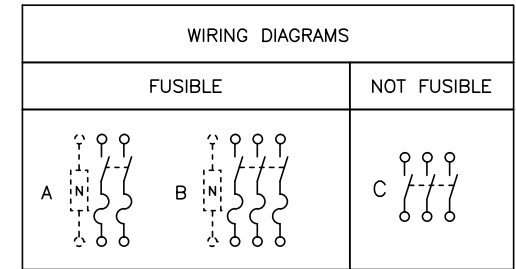

TERMINAL LUGS			
AMPERES	MAX WIRE	MIN WIRE	TYPE
30	#6 AWG	#12 AWG	AL
30	#6 AWG	#14 AWG	CU



\*FROM SIDE OF ENCLOSURE

DUAL DIMENSIONS: INCHES  
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	AMPERAGE RATINGS	WIRING DIAG	HORSEPOWER RATINGS																
				240VAC				480VAC				600VAC				250 VDC		600 VDC		
				STD		MAX		STD		MAX		STD		MAX		STD	MAX	STD	MAX	
				1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø	1Ø	3Ø					
CH221AWK	240VAC,250VDC	30	A	1 1/2●	3‡	3●	7 1/2‡	-	-	-	-	-	-	-	-	-	5	-	-	-
CH321AWK	240VAC,250VDC	30	B	1 1/2▲	3■	3▲	7 1/2■	-	-	-	-	-	-	-	-	-	5	-	-	-
CH361AWK	600VAC,600VDC	30	B	-	-	-	-	3▲	5■	7 1/2▲	15■	-	7 1/2	-	20	5▲	-	10▲	15	
CHU361AWK	600VAC,600VDC	30	C	-	-	5▲	10■	-	-	7 1/2▲	20■	-	-	10▲	30	-	5	-	15▲	
CHU361AWKEI	600VAC,600VDC	30	C	-	-	5▲	10■	-	-	7 1/2▲	20■	-	-	10▲	30	-	5▲	-	15▲	

- NOTES:  
 FINISH - GRAY BAKED ENAMEL  
 CSA CERTIFIED FILE #89067  
 ALL NEUTRALS - INSULATED  
 WHEN MOUNTING THESE SWITCHES, ALLOW 3.00/[76] MIN CLEARANCE BETWEEN ENCLOSURES FOR OPENING OF SIDE HINGED DOOR.  
 ▲ USE BOTH OUTER SWITCHING POLES  
 ● USE BOTH SWITCHING POLES  
 ■ IF CORNER GROUNDED DELTA, INSTALL NEUTRAL AND USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.  
 ‡ FOR CORNER GROUNDED DELTA ONLY, USE OUTER SWITCHING POLES FOR UNGROUNDED CONDUCTORS.

HEAVY DUTY SAFETY SWITCHES  
 VISIBLE BLADE TYPE  
 30 AMPERE-SERIES F6  
 ENCLOSURE - NEMA TYPE 12/3R



DWG# 2231C  
NO.