


GVAX225

Undervoltage release (MN), TeSys Deca, 220-240 V AC 50 Hz, safety device for use with GV2ME

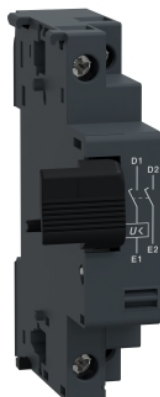

Main

| | |
|---------------------------|--------------------------|
| Range | TeSys TeSys Deca |
| Device short name | GVAX |
| Product or Component Type | Safety undervoltage trip |

Complementary

| | |
|---------------------------------|--|
| Range compatibility | TeSys GV2ME TeSys Deca |
| [Uc] control circuit voltage | 220...240 V AC 50 Hz |
| Control circuit voltage limits | 0.85...1.1 Un |
| [Ui] rated insulation voltage | 690 V AC IEC 60947-1 600 V AC UL 60947-4-1 600 V AC CSA C22.2 No 60947-4-1 |
| Threshold tripping voltage | 0.7...0.35 Un |
| Inrush power in VA | 12 VA AC |
| Inrush power in W | 8 W |
| Hold-in Power Consumption in VA | 3.5 VA AC |
| Hold-in power consumption in W | 1.1 W |
| Operating time | 10...15 ms IEC 60947-1 |
| On-load factor | 100 % |
| Connections - terminals | Screw clamp terminals 1 0.00...0.00 in ² (1...2.5 mm ²)solid Screw clamp terminals 2 0.00...0.00 in ² (1...2.5 mm ²)solid Screw clamp terminals 1 0.00...0.00 in ² (0.75...2.5 mm ²)flexible without cable end Screw clamp terminals 2 0.00...0.00 in ² (0.75...2.5 mm ²)flexible without cable end Screw clamp terminals 1 0.00...0.00 in ² (0.75...1.5 mm ²)flexible with cable end Screw clamp terminals 2 0.00...0.00 in ² (0.75...1.5 mm ²)flexible with cable end |
| Tightening torque | < 1.4 N.m screw clamp terminals |
| Mechanical durability | 30000 cycles |
| Quantity per Set | Set of 10 |
| Height | 3.50 in (89 mm) |
| Width | 0.71 in (18 mm) |
| Depth | 2.60 in (66 mm) |
| Net Weight | 0.23 lb(US) (0.105 kg) |
| Color | Dark grey |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Ordering and shipping details

| | |
|-------------------|----------------------------------|
| Category | 22367-MANUAL STR PROTECTOR - GV2 |
| Discount Schedule | I11 |
| GTIN | 3389110346107 |
| Returnability | No |
| Country of origin | CZ |

Packing Units

| | |
|------------------------------|------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.38 in (3.5 cm) |
| Package 1 Width | 3.35 in (8.5 cm) |
| Package 1 Length | 3.62 in (9.2 cm) |
| Package 1 Weight | 4.62 oz (131.0 g) |
| Unit Type of Package 2 | S01 |
| Number of Units in Package 2 | 16 |
| Package 2 Height | 5.91 in (15.0 cm) |
| Package 2 Width | 5.91 in (15.0 cm) |
| Package 2 Length | 15.75 in (40.0 cm) |
| Package 2 Weight | 4.97 lb(US) (2.256 kg) |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

GVAX ...

