



### Main

|                           |   |
|---------------------------|---|
| Range of Product          | Modicon STB distributed I/O solution  |
| Product or Component Type | Standard analog input kit   |
| Kit composition           | STBART0200 module<br>STBXTS1100, 6-terminal screw type connector<br>STBXBA1000 base<br>STBXTS2100, 6-terminal spring clamp connector  |
| Analogue input type       | Voltage +/- 80 mV<br>Temperature probe -100...+260 °C Cu 10 2, 3 or 4 wires IEC<br>Temperature probe -100...+450 °C Pt 100 2, 3 or 4 wires US/JIS<br>Temperature probe -100...+450 °C Pt 1000 2, 3 or 4 wires US/JIS<br>Temperature probe -200...+850 °C Pt 100 2, 3 or 4 wires IEC<br>Temperature probe -200...+850 °C Pt 1000 2, 3 or 4 wires IEC<br>Temperature probe -60...+180 °C Ni 100 2, 3 or 4 wires IEC<br>Temperature probe -60...+180 °C Ni 1000 2, 3 or 4 wires IEC<br>Thermocouple +130...+1820 °C thermocouple B<br>Thermocouple -200...+760 °C thermocouple J<br>Thermocouple -270...+1000 °C thermocouple E<br>Thermocouple -270...+1370 °C thermocouple K<br>Thermocouple -270...+400 °C thermocouple T<br>Thermocouple -50...+1665 °C thermocouple R<br>Thermocouple -50...+1665 °C thermocouple S |
| Analogue input number     | 2   |
| Analogue input resolution | 15 bits + sign  |
| Type of filter            | Single low pass input filter 25 Hz  |

### Complementary

|   |   |
|---|---|
| Absolute maximum input                    | +/- 7.5 V DC  |
| Cold swapping                             | Yes   |
| Hot swapping fallback                     | Yes for standard NIMs   |
| Fallback status                           | State 0 basic NIMs<br>User configurable standard NIMs                             |
| Data format                               | EN 61131-2<br>IEC 61131-2   |
| Input impedance                           | 10 MOhm +/- 80 mV   |
| Maximum supply current for sensors        | 100 mA per input channels   |
| Protection Type                           | Short-circuit protection  |
| Absolute accuracy error                   | +/- 0.1 % of full scale 25 °C internal<br>+/- 0.15 % of full scale 25 °C external |
| Insulation between channels and logic bus | 1500 V for 1 minute   |
| Addressing requirement                    | 1 word for cold-junction compensation<br>2 input words                            |
| Product Compatibility                     | Mounting base STBXBA1000<br>Power distribution module STBPDT3100/3105             |
| [Us] rated supply voltage                 | 24 V DC   |
| Supply                                    | Power distribution module   |
| Current consumption                       | 30 mA 5 V DC logic bus  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                           |  |
|---------------------------|--|
| Measurement resolution    | 0.01 mV voltage<br>0.1 °C or 0.1 °F temperature probe<br>0.1 °C or 0.1 °F thermocouple   |
| Conversion time           | 150 ms voltage 60 Hz<br>170 ms voltage 50 Hz<br>180 ms temperature probe 60 Hz 2 or 4 wires<br>200 ms temperature probe 50 Hz 2 or 4 wires<br>210 ms thermocouple with internal cold-junction compensation 60 Hz<br>230 ms thermocouple with internal cold-junction compensation 50 Hz<br>300 ms temperature probe 60 Hz 3 wires<br>340 ms temperature probe 50 Hz 3 wires<br>360 ms thermocouple with external cold-junction compensation 60 Hz<br>400 ms thermocouple with external cold-junction compensation 50 Hz |
| Maximum wiring resistance | 20 Ohm Cu 10 IEC/US/JIS 2 or 3 wires<br>20 Ohm Ni 100 IEC/US/JIS 2 or 3 wires<br>20 Ohm Pt 100 IEC/US/JIS 2 or 3 wires<br>200 Ohm Ni 1000 IEC/US/JIS 2 or 3 wires<br>200 Ohm Pt 1000 IEC/US/JIS 2 or 3 wires<br>50 Ohm Cu 10 IEC/US/JIS 4 wires<br>50 Ohm Ni 100 IEC/US/JIS 4 wires<br>50 Ohm Pt 100 IEC/US/JIS 4 wires<br>500 Ohm Ni 1000 IEC/US/JIS 4 wires<br>500 Ohm Pt 1000 IEC/US/JIS 4 wires  |

|                      |  |
|----------------------|--|
| Measurement accuracy | +/- 1 °C Ni 100 25 °C external<br>+/- 1 °C Ni 100 25 °C internal<br>+/- 1 °C Ni 1000 25 °C external<br>+/- 1 °C Ni 1000 25 °C internal<br>+/- 1 °C Pt 100 25 °C internal<br>+/- 1 °C Pt 1000 25 °C internal<br>+/- 1.75 °C thermocouple B with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple E with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple J with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple K with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple R with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple S with external cold-junction compensation 77 °F (25 °C)<br>+/- 1.75 °C thermocouple T with external cold-junction compensation 77 °F (25 °C)<br>+/- 2 °C Pt 100 25 °C external<br>+/- 2 °C Pt 1000 25 °C external<br>+/- 2.85 °C thermocouple B with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple E with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple J with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple K with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple R with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple S with external cold-junction compensation 140 °F (60 °C)<br>+/- 2.85 °C thermocouple T with external cold-junction compensation 140 °F (60 °C)<br>+/- 3.6 °C thermocouple R with internal cold-junction compensation 77 °F (25 °C)<br>+/- 4 °C Cu 10 25 °C external<br>+/- 4 °C Cu 10 25 °C internal<br>+/- 4 °C thermocouple K with internal cold-junction compensation 77 °F (25 °C)<br>+/- 4.1 °C thermocouple S with internal cold-junction compensation 77 °F (25 °C)<br>+/- 4.2 °C thermocouple R with internal cold-junction compensation 140 °F (60 °C)<br>+/- 4.4 °C thermocouple T with internal cold-junction compensation 77 °F (25 °C)<br>+/- 4.6 °C thermocouple B with internal cold-junction compensation 77 °F (25 °C)<br>+/- 4.6 °C thermocouple E with internal cold-junction compensation 77 °F (25 °C)<br>+/- 5 °C thermocouple S with internal cold-junction compensation 140 °F (60 °C)<br>+/- 5.1 °C thermocouple J with internal cold-junction compensation 77 °F (25 °C)<br>+/- 5.5 °C thermocouple K with internal cold-junction compensation 140 °F (60 °C)<br>+/- 6.4 °C thermocouple T with internal cold-junction compensation 140 °F (60 °C)<br>+/- 6.8 °C thermocouple B with internal cold-junction compensation 140 °F (60 °C)<br>+/- 6.8 °C thermocouple E with internal cold-junction compensation 140 °F (60 °C)<br>+/- 7 °C thermocouple J with internal cold-junction compensation 140 °F (60 °C) |
| Marking              | CE   |
| Overvoltage category | II   |
| Status LED           | 1 LED (Green) module status (RDY)<br>1 LED (Red) module error (ERR)  |

## Environment

|                                       |   |
|---------------------------------------|---|
| Product Certifications                | UL<br>FM Class 1 Division 2<br>CSA<br>ATEX Cat 3G<br>C-tick |
| Pollution degree                      | 2 IEC 60664-1   |
| Operating altitude                    | <= 6561.68 ft (2000 m)                                      |
| IP degree of protection               | IP20 conforming to EN 61131-2 class 1                       |
| Ambient Air Temperature for Operation | 32...158 °F (0...70 °C)                                     |
| Ambient air temperature for operation | 32...140 °F without derating                                |
| Ambient air temperature for storage   | -40...185 °F (-40...85 °C) without derating                 |

|                                     |  |
|-------------------------------------|--|
| Ambient air temperature for storage | -40...185 °F without derating  |
| Relative humidity                   | 95 % 140 °F (60 °C) without condensation   |
| Vibration resistance                | +/-0.35 mm 10...58 Hz<br>3 gn 58...150 Hz 35 x 7.5 mm symmetrical DIN rail<br>5 gn 58...150 Hz 35 x 15 mm symmetrical DIN rail |
| Shock resistance                    | 30 gn 11 ms IEC 88 reference 2-27  |

## Ordering and shipping details

|                   |                        |
|-------------------|------------------------|
| Category          | 18215-ADVANTYS STB I/O |
| Discount Schedule | PC32                   |
| GTIN              | 3595863948691          |
| Returnability     | Yes                    |
| Country of origin | FR                     |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Number of Units in Package 1 | 1                       |
| Package 1 Height             | 1.18 in (3.000 cm)      |
| Package 1 Width              | 3.27 in (8.300 cm)      |
| Package 1 Length             | 5.24 in (13.300 cm)     |
| Package 1 Weight             | 4.80 oz (136.000 g)     |
| Unit Type of Package 2       | S02                     |
| Number of Units in Package 2 | 42                      |
| Package 2 Height             | 5.91 in (15.000 cm)     |
| Package 2 Width              | 11.81 in (30.000 cm)    |
| Package 2 Length             | 15.75 in (40.000 cm)    |
| Package 2 Weight             | 13.30 lb(US) (6.031 kg) |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>  |
| Mercury free               | Yes   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| RoHS exemption information | <a href="#">Yes</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End Of Life Information</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.  |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


## Dimensions

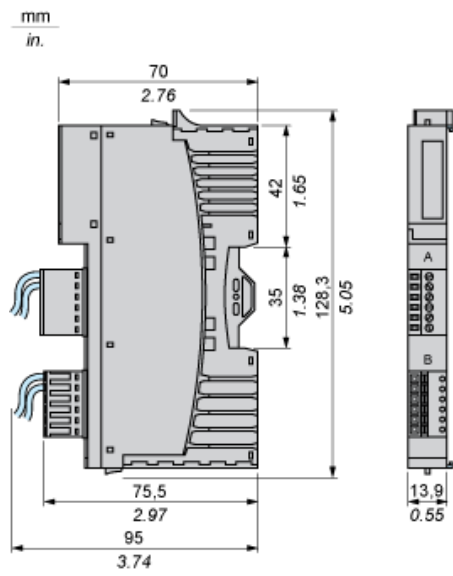


## Wiring Diagrams

### Examples


2 and 3-wire temperature probes

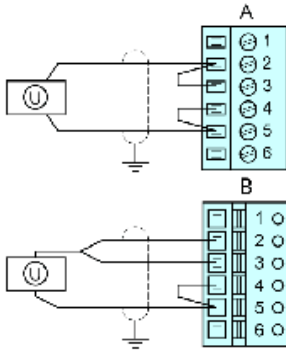


4-wire temperature probes

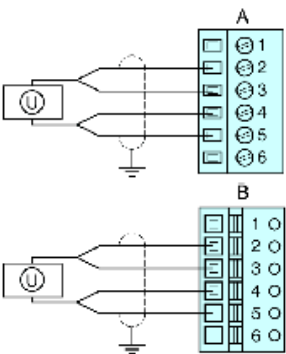


2-wire temperature probes in highly disturbed environments

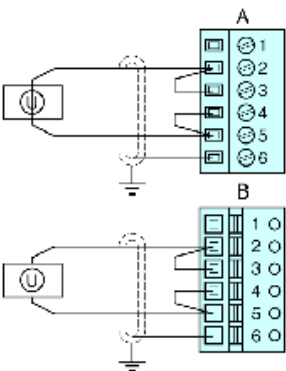

2-wire thermocouple and voltage sensor (mV)

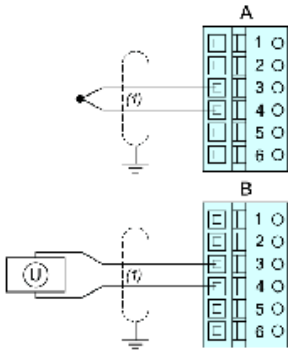

2-wire thermocouple and voltage sensor (mV) with cold-junction compensation

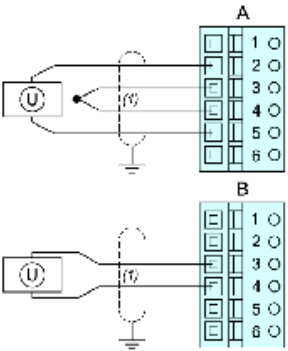

| Pin   | Top Connections  | Bottom Connections      |
|---|--|-------------------------|
| 1   | no connection  | no connection           |
| 2   | Always used for RTD +  | Always used for RTD +   |
| RTD + connection for external cold-junction compensation on a TC sensor |  |                         |
| no connection for TC or mV  | no connection for TC or mV                                   |                         |
| 3   | TC + or mV + connection                                      | TC + or mV + connection |
| Either used or jumpered for a two-, three-, or four-wire RTD            | Either used or jumpered for a two-, three-, or four-wire RTD |                         |
| 4   | TC - or mV - connection                                      | TC - or mV - connection |
| Either used or jumpered for a two-, three-, or four-wire RTD            | Either used or jumpered for a two-, three-, or four-wire RTD |                         |
| 5   | Always used for RTD -  | Always used for RTD -   |
| RTD - connection for external cold-junction compensation on a TC sensor |  |                         |

| Pin                        | Top Connections            | Bottom Connections |
|----------------------------|----------------------------|--------------------|
| no connection for TC or mV | no connection for TC or mV |                    |
| 6                          | inner double-shield cable  | cable shield       |