RXZE2S111M

Socket, Harmony, for RXM3 relays, screw connectors, separate contact





Main

Harmony Electromechanical Relays
Socket
Separate
Plug-in relay RXM 3 C/O
Flat
RXZ
10

Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.251 x 2.5 mm² AWG 22AWG 14) flexible with cable end Connector, 2 x 0.252 x 1 mm² AWG 22AWG 17) flexible with cable end Connector, 1 x 0.51 x 2.5 mm² AWG 20AWG 14) solid without cable end Connector, 2 x 0.52 x 1.5 mm² AWG 20AWG 16) solid without cable end
Tightening torque	< 1 N.m M3
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.06 in (27 mm)
Net Weight	0.15 lb(US) (0.066 kg)

Environment

[Uimp] rated impulse withstand voltage	4 kV
Overvoltage category	III
Pollution degree	3
Standards	IEC 61984
Product Certifications	UL Lloyd's CSA
Ambient Air Temperature for Storage	-40185 °F (-4085 °C)
Ambient Air Temperature for Operation	-40131 °F (-4055 °C)
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Ordering and shipping details

Category	21128-ZELIO ICE CUBE RELAY ACCESSORIES	
Discount Schedule	CP2	
GTIN	3389119404273	
Returnability	Yes	
Country of origin	CN	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.06 in (2.7 cm)
Package 1 Width	2.40 in (6.1 cm)
Package 1 Length	3.23 in (8.2 cm)
Package 1 Weight	2.15 oz (61 g)
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	4.57 in (11.6 cm)
Package 2 Width	2.68 in (6.8 cm)
Package 2 Length	5.51 in (14 cm)
Package 2 Weight	22.01 oz (624 g)
Unit Type of Package 3	S02
Number of Units in Package 3	200
Package 3 Height	5.91 in (15 cm)
Package 3 Width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)
Package 3 Weight	23.59 lb(US) (10.7 kg)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) [™] EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	₫Yes
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

Warranty	18 months	


RXZE2S111M

Dimensions

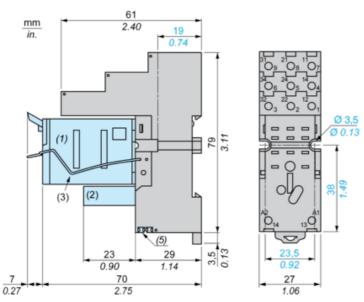

- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes Ø 3.5 mm x 6.5 mm / Ø 0.13 in. x 0.25 in.
- (5) 2 bus jumpers


Wiring Diagram



Symbols shown in blue correspond to Nema marking.

Bus Jumpers Mounting on Sockets with Separate Contacts

Example of RXZS2 bus jumper mounting on sockets (view from below)



- (1) 2 bus jumpers (polarity A2)
- (2) 2 bus jumpers (polarity A1)