



Main

| | |
|---------------------------|---------------|
| Range | TeSys |
| Product or Component Type | Contacteur |
| Product name | TeSys K |
| Device short name | LC1K |
| Device Application | Control |
| Contacteur application | Motor control |

Complementary

| | |
|---|---|
| Utilisation category | AC-3 AC-4 AC-3e |
| Poles description | 3P |
| Power pole contact composition | 3 NO |
| [Ue] rated operational voltage | Power circuit 690 V AC 50/60 Hz Signalling circuit ≤ 690 V AC 50/60 Hz |
| [Ie] rated operational current | 6 A ≤ 440 V AC AC-3 power circuit 6 A ≤ 440 V AC AC-3e power circuit |
| Control circuit type | AC 50/60 Hz |
| [Uc] control circuit voltage | 220...230 V AC 50/60 Hz |
| Motor power kW | 1.5 KW 220...230 V AC 50/60 Hz AC-3 2.2 KW 380...415 V AC 50/60 Hz AC-3 3 KW 440 V AC 50/60 Hz AC-3 3 KW 480 V AC 50/60 Hz AC-3 3 KW 500...600 V AC 50/60 Hz AC-3 3 KW 660...690 V AC 50/60 Hz AC-3 1.5 KW 400 V AC 50/60 Hz AC-4 1.5 KW 220...230 V AC 50/60 Hz AC-3e 2.2 KW 380...415 V AC 50/60 Hz AC-3e 3 KW 440 V AC 50/60 Hz AC-3e 3 KW 480 V AC 50/60 Hz AC-3e 3 KW 500...600 V AC 50/60 Hz AC-3e 3 KW 660...690 V AC 50/60 Hz AC-3e |
| Auxiliary contact composition | 1 NO |
| [Uimp] rated impulse withstand voltage | 8 kV |
| Overtoltage category | III |
| [Ith] conventional free air thermal current | 20 A 122 °F (50 °C) power circuit 10 A 122 °F (50 °C) signalling circuit |
| Irms rated making capacity | 110 A AC power circuit NF C 63-110 110 A AC power circuit IEC 60947 110 A AC signalling circuit IEC 60947 |
| Rated breaking capacity | 110 A 415 V IEC 60947 110 A 440 V IEC 60947 80 A 500 V IEC 60947 110 A 220...230 V IEC 60947 110 A 380...400 V IEC 60947 70 A 660...690 V IEC 60947 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|--|--|
| [Icw] rated short-time withstand current | 90 A 122 °F (50 °C) - 1 s power circuit 85 A 122 °F (50 °C) - 5 s power circuit 80 A 122 °F (50 °C) - 10 s power circuit 60 A 122 °F (50 °C) - 30 s power circuit 45 A 122 °F (50 °C) - 1 min power circuit 40 A 122 °F (50 °C) - 3 min power circuit 20 A 122 °F (50 °C) - >= 15 min power circuit 80 A - 1 s signalling circuit 90 A - 500 ms signalling circuit 110 A - 100 ms signalling circuit |
| Associated fuse rating | 25 A gG <= 440 V power circuit 25 A aM power circuit 10 A gG signalling circuit IEC 60947 10 A gG signalling circuit VDE 0660 |
| Average impedance | 3 mOhm - lth 20 A 50 Hz power circuit |
| [Ui] rated insulation voltage | Power circuit 600 V UL 508 Power circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-5-1 Signalling circuit 600 V UL 508 Power circuit 600 V CSA C22.2 No 14 Signalling circuit 600 V CSA C22.2 No 14 |
| Insulation resistance | > 10 MOhm signalling circuit |
| Inrush power in VA | 30 VA 68 °F (20 °C)) |
| Hold-in power consumption in VA | 4.5 VA 68 °F (20 °C)) |
| Heat dissipation | 1.3 W |
| Control circuit voltage limits | Operational 0.85...1.1 U _c 122 °F (50 °C)) Drop-out 0.2...0.75 U _c 122 °F (50 °C)) |
| Connections - terminals | Screw clamp terminals 1 0.00...0.01 in ² (1.5...4 mm ²)solid Screw clamp terminals 1 0.00...0.01 in ² (0.75...4 mm ²)flexible without cable end Screw clamp terminals 1 0.00...0.00 in ² (0.34...2.5 mm ²)flexible with cable end Screw clamp terminals 2 0.00...0.01 in ² (1.5...4 mm ²)solid Screw clamp terminals 2 0.00...0.01 in ² (0.75...4 mm ²)flexible without cable end Screw clamp terminals 2 0.00...0.00 in ² (0.34...1.5 mm ²)flexible with cable end |
| Maximum operating rate | 3600 cyc/h |
| Auxiliary contacts type | Instantaneous 1 NO |
| Signalling circuit frequency | <= 400 Hz |
| Minimum switching current | 5 mA signalling circuit |
| Minimum switching voltage | 17 V signalling circuit |
| Mounting Support | Rail Plate |
| Tightening torque | 7.08...11.51 Lbf.In (0.8...1.3 N.m) screw clamp terminals Philips No 2 7.08...11.51 Lbf.In (0.8...1.3 N.m) screw clamp terminals flat Ø 6 mm 7.08...11.51 lbf.in (0.8...1.3 N.m) screw clamp terminals pozidriv No 2 |
| Operating time | 10...20 ms coil de-energisation and NO opening 10...20 ms coil energisation and NO closing |
| Safety reliability level | B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 2000000 cycles contactor with mechanical load EN/ISO 13849-1 |
| Non overlap distance | 0.02 in (0.5 mm) |
| Mechanical durability | 10 Mcycles |
| Electrical durability | 1.3 Mcycles 6 A AC-3 <= 440 V 1.3 Mcycles 6 A AC-3e <= 440 V |
| Mechanical robustness | Shocks contactor closed, on X axis10 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Y axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Z axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on X axis6 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on Y axis10 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on Z axis10 Gn for 11 ms IEC 60068-2-27 Vibrations contactor closed4 Gn, 5...300 Hz IEC 60068-2-6 Vibrations contactor opened2 Gn, 5...300 Hz IEC 60068-2-6 |
| Height | 2.28 in (58 mm) |
| Width | 1.77 in (45 mm) |
| Depth | 2.24 in (57 mm) |
| Net Weight | 0.40 lb(US) (0.18 kg) |

Environment

| | |
|-------------------------------------|--|
| Standards | EN/IEC 60947-4-1 GB/T 14048.4 UL 60947-4-1 CSA C22.2 No 60947-4-1 JIS C8201-4-1 |
| Product Certifications | CB Scheme CCC UL CSA EAC CE UKCA |
| IP degree of protection | IP2X VDE 0106 |
| Protective treatment | TC IEC 60068 TC DIN 50016 |
| Ambient Air Temperature for Storage | -58...176 °F (-50...80 °C) |
| Operating altitude | 6561.68 ft (2000 m) without derating |
| Flame retardance | V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102 |

Ordering and shipping details

| | |
|-------------------|---------------------------------|
| Category | 22326-CTR,K-LINE,AC,OPEN,NONREV |
| Discount Schedule | I12 |
| GTIN | 3389110368802 |
| Returnability | Yes |
| Country of origin | ID |

Packing Units

| | |
|------------------------------|----------------------------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 1.97 in (5 cm) |
| Package 1 Width | 2.36 in (6 cm) |
| Package 1 Length | 2.56 in (6.5 cm) |
| Package 1 Weight | 6.24 oz (177 g) |
| Unit Type of Package 2 | S02 |
| Number of Units in Package 2 | 50 |
| Package 2 Height | 5.91 in (15 cm) |
| Package 2 Width | 11.81 in (30 cm) |
| Package 2 Length | 15.75 in (40 cm) |
| Package 2 Weight | 20.05 lb(US) (9.094 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 800 |
| Package 3 Height | 29.53 in (75 cm) |
| Package 3 Width | 31.50 in (80 cm) |
| Package 3 Length | 23.62 in (60 cm) |
| Package 3 Weight | 338.42 lb(US) (153.504 kg) |

Offer Sustainability

| | |
|---------------------------|---|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |


| | |
|----------------------------|--|
| Mercury free | Yes |
| China RoHS Regulation | China RoHS Declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End Of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Contractual warranty


| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

Contactors LC1 K, LP1 K, LP4 K: Mounting on Panel

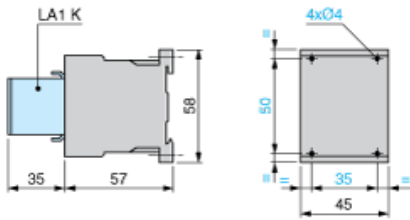


Contactors LC1 K, LP1 K, LP4 K: Mounting on Rail AM1 DP200 or AM1 DE200 (35 mm)

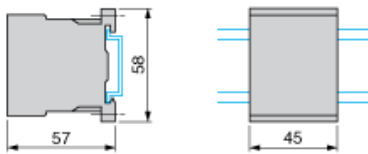

Wiring

3-Pole Contactors: 3P + N/O



3-Pole Contactors: 3P + N/C

