SIEMENS

Data sheet

3SU1401-1BB60-1AA0



LED module with integrated LED 24 V AC/DC, white, screw terminal, for front plate mounting, Minimum order quantity 5 or a multiple thereof

product brand name product designation product type designation

SIRIUS ACT LED module

product type designation 3SU1 product component Yes • diode • lamp transformer No • light source Yes series resistor No insulation voltage rated value 320 V degree of pollution 3 AC/DC type of voltage of the operating voltage AC/DC • for actuation surge voltage resistance rated value 4 kV consumed current maximum 25 mA protection class IP IP40 • of the enclosure IP20 • of the terminal shock resistance • according to IEC 60068-2-27 sinusoidal half-wave 15g / 11 ms • for railway applications according to EN 61373 Category 1, Class B vibration resistance • according to IEC 60068-2-6 10 ... 500 Hz: 5g • for railway applications according to EN 61373 Category 1, Class B operating period typical 100 000 h reference code according to IEC 81346-2 **Substance Prohibitance (Date)** 10/01/2014 operating voltage 1 at AC - at 50 Hz rated value 24 V - at 60 Hz rated value 24 V • at DC rated value 24 V relative positive tolerance of the operating voltage 20 % relative negative tolerance of the operating voltage 20 % Control circuit/ Control inrush current maximum 2 A Connections/ Terminals type of electrical connection screw-type terminals type of connectable conductor cross-sections

• solid with core end processing

• solid without core end processing

2x (0.5 ... 0.75 mm²)

2x (1.0 ... 1.5 mm²)

finely stranded with core end processing
 finely stranded without core end processing
 at AWG cables
 tightening torque with screw-type terminals
 2x (0.5 ... 1.5 mm²)
 2x (1,0 ... 1,5 mm²)
 2x (18 ... 14)
 0.8 ... 0.9 N·m

type of light source
color of the light source
white
light intensity
certificate of suitability

• ATEX No

Ambient conditions

ambient temperature

• during operation

• during storage

-25 ... +70 °C

-40 ... +80 °C

environmental category during operation according to IEC 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%, no condensation in operation permitted)

Installation/ mounting/ dimensions

fastening method

● of modules and accessories

Front plate mounting

 height
 33.2 mm

 width
 9.8 mm

 depth
 29.4 mm

suitability for integration
plastic enclosure
metal enclosure
Yes
Yes

Certificates/ approvals

General Product Approval EMC Declaration of Conformity



Confirmation









Declaration of Conformity Test Certificates Marine / Shipping

CE

Special Test Certificate

Type Test Certificates/Test Report







Marine / Shipping other Environment



Confirmation

Environmental Confirmations

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1401-1BB60-1AA0


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1401-1BB60-1AA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3SU1401-1BB60-1AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1401-1BB60-1AA0&lang=en

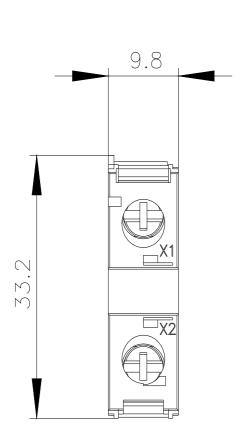

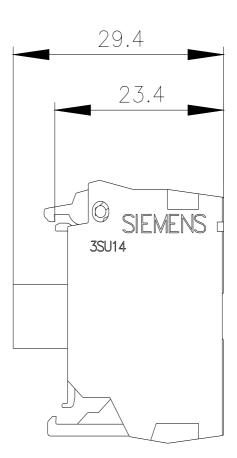

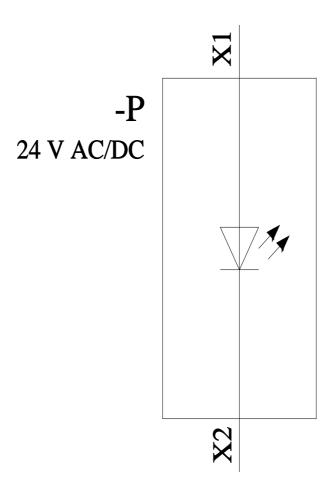

last modified: 3/9/2022 🖸