SIEMENS

Data sheet 3ZY1212-2DA00



Device termination connector for 3SK1 safety relay Width 22.5 mm for electrical connection of SIRIUS devices in industrial standard mounting rail enclosure

product brand name product category product designation design of the product Substance Prohibitance (Date) fastening method

height width SIRIUS

Device connector

Device termination connector For 3SK1/width 22.5 mm

-01 35K 1/WIGHT 22.5 II

03/01/2017

Screw and DIN rail mounting

117.5 mm 22.5 mm

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ZY1212-2DA00

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3ZY1212-2DA00

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3ZY1212-2DA00

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3ZY1212-2DA00&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3ZY1212-2DA00/manual

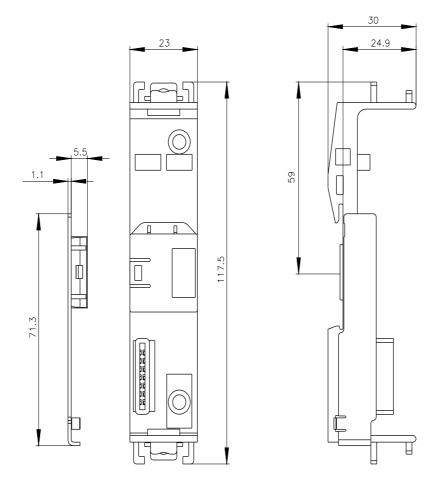

last modified: 12/5/2022 🖸