SIEMENS

Data sheet 3ND2132



LV HRC fuse element, NH1, In: 125 A, aM, Un AC: 690 V, Un DC: 400 V, Front indicator, live grip lugs

| Model | | | |
|---|---------------------------------------|-------------------------------------|-------------------|
| product brand name | | SENTRON | |
| product designation | | LV HRC fuse link | |
| design of the product | | With blade contacts | |
| design of an identification indicator | | Front indicators | |
| design of the switching contact | | Non-corroding, silver-plated | |
| design of the fuse link | | LV HRC fuse link | |
| General technical data | | | |
| size of fuse system according to EN 60269-1 | | NH1 | |
| operating class of the fuse link | | aM | |
| mounting type | | non-insulated grip lugs | |
| type of voltage of the operating voltage | | AC | |
| supply voltage | | | |
| at AC rated value | | 690 V | |
| Protection class | | | |
| protection class IP | · · · · · · · · · · · · · · · · · · · | | etors |
| Switching capacity | | | |
| switching capacity current | | | |
| according to IEC 60947-2 rated value | | 120 kA | |
| Dissipation | | | |
| power loss [W] | | 8.1 W | |
| power loss [W] for rated value of the current at AC in hot operating state per pole | | 8.1 W | |
| Mechanical Design | | | |
| width of the enclosure | | 47.2 mm | |
| mounting position | | Any, preferably vertical | |
| net weight | | 432 g | |
| Environmental conditions | | | |
| ambient temperature during operation | | | |
| • minimum | | -5 °C | |
| • maximum | | 40 °C | |
| environmental category | | -20 to +50 at 95% relative humidity | |
| environmental category during storage | | 90% at 20°C | |
| Certificates | | | |
| reference code according to IEC 81346-2 | | FC | |
| General Product Approval | Declaration of | of Conformity | Test Certificates |

Confirmation



CE



Type Test Certificates/Test Report

Special Test Certificate

other

Miscellaneous Confirmation

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ND2132

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3ND2132

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3ND2132

CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

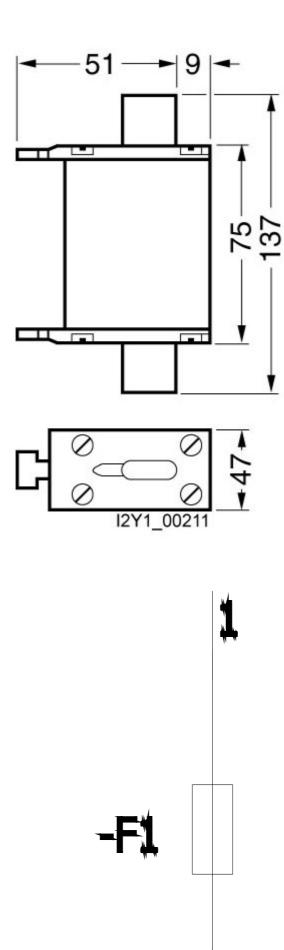

last modified: 2/14/2023 🖸