

Contactor assembly for star-delta (wye-delta) start AC-3, 22 kW/400 V, 24 V AC 50/60 Hz, 3-pole, size S0 Spring-type terminals electrical and mechanical interlock 3 NO + 3 NC integrated



product brand name
product designation
product type designation
manufacturer's article number

- 1 of the supplied contactor
- 2 of the supplied contactor
- 3 of the supplied contactor
- of the supplied RS assembly kit
- of the supplied function module for wye-delta circuits

SIRIUS
 Contactor assembly for star-delta (wye-delta) start
 3RA24

[3RT2027-2AC20](#)
[3RT2027-2AC20](#)
[3RT2026-2AC20](#)
[3RA2923-2BB2](#)
[3RA2816-0EW20](#)

General technical data

size of contactor S0
product extension auxiliary switch No
shock resistance at rectangular impulse

- at AC 8,3g / 5 ms, 5,3g / 10 ms
- at DC 10g / 5 ms, 7,5g / 10 ms

shock resistance with sine pulse

- at AC 13,5g / 5 ms, 8,3g / 10 ms
- at DC 15g / 5 ms, 10g / 10 ms

mechanical service life (operating cycles)

- of contactor typical 10 000 000
- of the contactor with added auxiliary switch block typical 10 000 000

reference code according to IEC 81346-2 Q
Substance Prohibitance (Date) 10/01/2009

Ambient conditions

installation altitude at height above sea level maximum 2 000 m
ambient temperature

- during operation -25 ... +60 °C
- during storage -55 ... +80 °C

Main circuit

number of poles for main current circuit 3
number of NO contacts for main contacts 3
number of NC contacts for main contacts 0
operating voltage

- at AC-3 rated value maximum 690 V

operational current

- at AC-3 — at 400 V rated value 50 A

operating power

- at AC-3 — at 400 V rated value 22 kW

— at 500 V rated value	19 kW
— at 690 V rated value	19 kW
operating frequency	
• at AC-3 maximum	1 000 1/h
Control circuit/ Control	
type of voltage of the control supply voltage	AC
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
operating range factor control supply voltage rated value of magnet coil at AC	
• at 50 Hz	0.8 ... 1.1
• at 60 Hz	0.8 ... 1.1
apparent pick-up power of magnet coil at AC	
• at 50 Hz	164 VA
• at 60 Hz	160 VA
inductive power factor with closing power of the coil	
• at 50 Hz	0.72
• at 60 Hz	0.74
apparent holding power of magnet coil at AC	
• at 50 Hz	23 VA
• at 60 Hz	19 VA
inductive power factor with the holding power of the coil	
• at 50 Hz	0.25
• at 60 Hz	0.28
Auxiliary circuit	
number of NC contacts for auxiliary contacts	
• instantaneous contact	3
number of NO contacts for auxiliary contacts	
• instantaneous contact	3
contact reliability of auxiliary contacts	< 1 error per 100 million operating cycles
UL/CSA ratings	
contact rating of auxiliary contacts according to UL	A600 / Q600
Short-circuit protection	
design of the fuse link	
• for short-circuit protection of the main circuit	
— with type of coordination 1 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 125 A
— with type of assignment 2 required	gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 50 A
• for short-circuit protection of the auxiliary switch required	fuse gG: 10 A
Installation/ mounting/ dimensions	
mounting position	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	114 mm
width	135 mm
depth	171 mm
required spacing	
• with side-by-side mounting	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm
• for grounded parts	
— forwards	6 mm
— backwards	0 mm
— upwards	6 mm
— at the side	6 mm
— downwards	6 mm
• for live parts	
— forwards	6 mm

— backwards	0 mm
— upwards	6 mm
— downwards	6 mm
— at the side	6 mm

Connections/ Terminals

type of electrical connection

- for main current circuit
- for auxiliary and control circuit
- at contactor for auxiliary contacts
- of magnet coil

spring-loaded terminals
spring-loaded terminals
Spring-type terminals
Spring-type terminals

type of connectable conductor cross-sections for main contacts

- solid
- solid or stranded
- finely stranded with core end processing
- finely stranded without core end processing

2x (1 ... 10 mm²)
2x (1 ... 10 mm²)
2x (1 ... 6 mm²)
2x (1 ... 6 mm²)

type of connectable conductor cross-sections

- for auxiliary contacts
 - solid or stranded
 - finely stranded with core end processing
 - finely stranded without core end processing
- at AWG cables for auxiliary contacts

2x (0.5 ... 2.5 mm²)
2x (0.5 ... 1.5 mm²)
2x (0.5 ... 1.5 mm²)
2x (20 ... 14)

Safety related data

B10 value with high demand rate according to SN 31920

1 000 000

proportion of dangerous failures

- with low demand rate according to SN 31920
- with high demand rate according to SN 31920

40 %
75 %

failure rate [FIT] with low demand rate according to SN 31920

100 FIT

T1 value for proof test interval or service life according to IEC 61508

20 a

protection class IP on the front according to IEC 60529

IP20

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front

Communication/ Protocol

product function bus communication

No

protocol is supported AS-Interface protocol

No

product function control circuit interface with IO link

No

Certificates/ approvals

General Product Approval

Declaration of Conformity

Test Certificates

Marine / Shipping

[Confirmation](#)



EG-Konf.

[Special Test Certificate](#)



ABS

Marine / Shipping



LRS



PRS



RINA



RMRS

other

Railway

[Confirmation](#)

[Vibration and Shock](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2426-8XF32-2AC2>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA2426-8XF32-2AC2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2426-8XF32-2AC2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2426-8XF32-2AC2&lang=en



Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA2426-8XF32-2AC2/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2426-8XF32-2AC2&objecttype=14&gridview=view1>

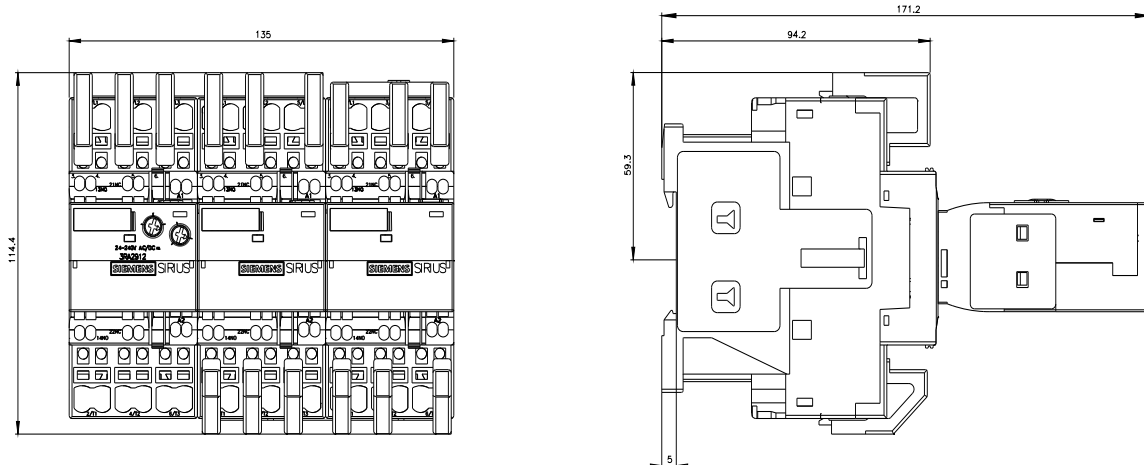

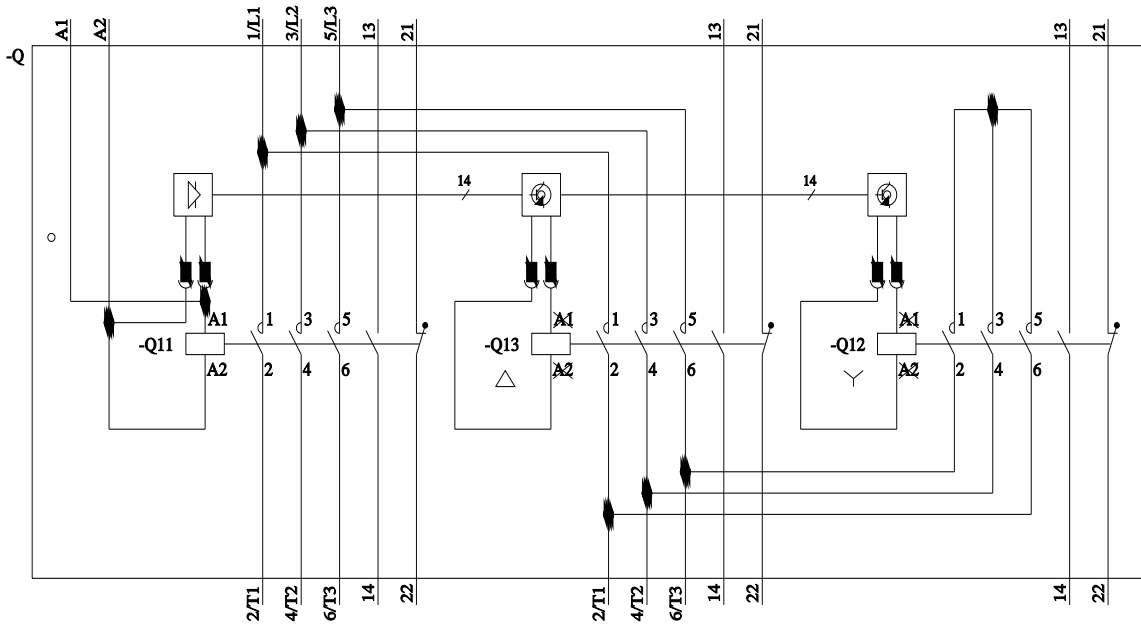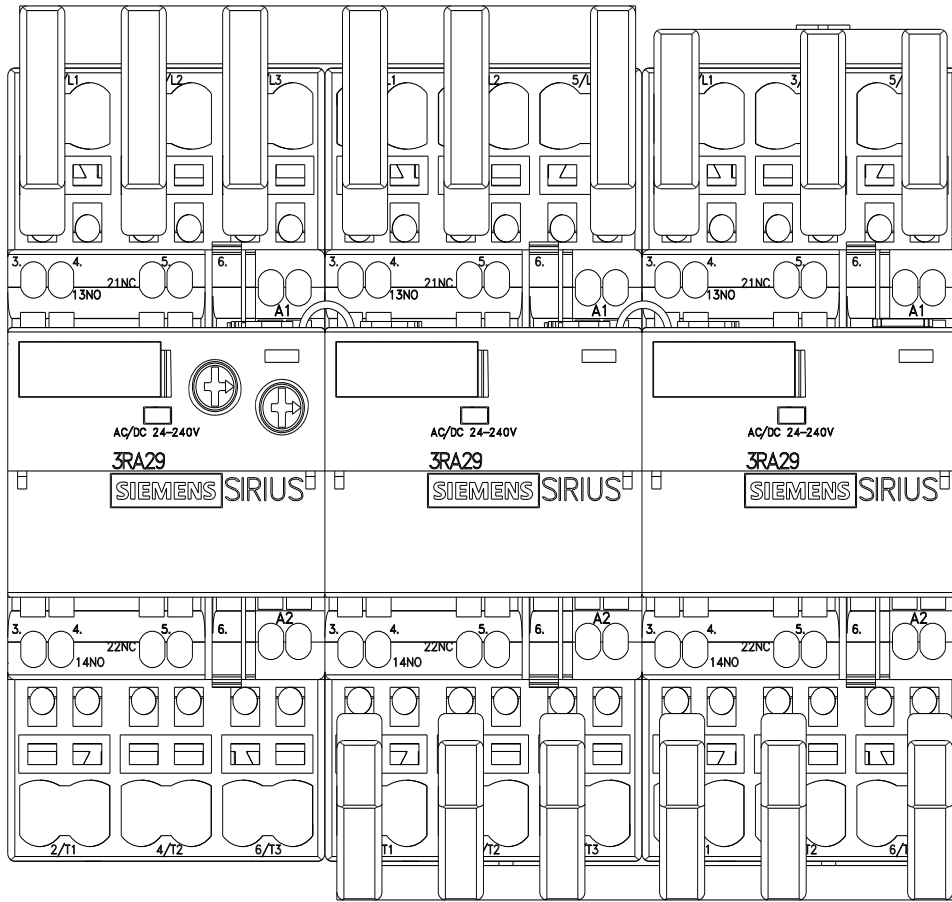

last modified:

11/21/2022 