

TECHNICAL DATA SHEET

Cable Tie, mounting head

Natural and black

Catamount®

**Features:**

- Mounting head (for screw size, see table information)

Materials and Finishes:

- Nylon 6.6 natural
- Nylon 6.6 UV resistant black


Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle of cables.

Certifications / Standards:**Ratings:**

- Minimum operating temperature: -40°C (-40°F)
- Maximum operating temperature: 85°C (185°F)
- Minimum installing temperature: -20°C (-4°F)
- Tensile Strength: 135N (30lb), 222N (50lb), 540N (120lb) - see table (page 2) for information

Cable tie, mounting head:

- Natural and black

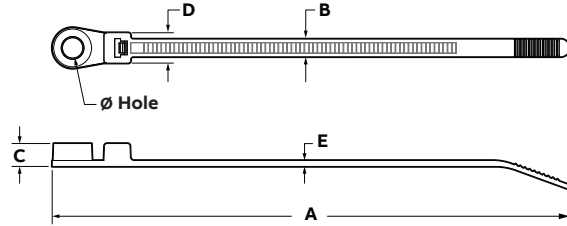

Part number characteristic:

L-5-30MH-0-C

- C = 100 pack
- M = 1000 pack
- 0 = Nylon 6.6 UV resistant black
- 9 = Nylon 6.6 natural

Product selection - inches (mm)

| Part no: GID no: | Max bundle diameter | A ± 0.125 (3.0) | B ± 0.01 (0.25) | C ± 0.03 (0.76) | D ± 0.03 (0.76) | E ± 0.01 (0.25) | Tensile strength lbs. (N) | Hole diameter |
|-----------------------------------|------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------------------|------------------|
| L-5-30MH-0-C 7TAG054680R0014 | 1.3 (32) | 5.9 (150) | 0.14 (3.6) | 0.18 (4.5) | 0.24 (6.2) | 0.43 (1.1) | 40 | 0.165 (4.2) |
| L-5-30MH-0-M 7TAG054680R0015 | | | | | | | | |
| L-5-30MH-9-C * 7TAG054670R0008 | | | | | | | | |
| L-5-30MH-9-M * 7TAG054680R0016 | | | | | | | | |
| L-7-50MH-0-C 7TAG054670R0009 | 2 (50) | 8.0 (204) | 0.19 (4.8) | 0.21 (5.4) | 0.34 (8.5) | 0.05 (1.3) | 50 | 0.216 (5.5) |
| L-7-50MH-0-M 7TAG054670R0010 | | | | | | | | |
| L-7-50MH-9-C 7TAG054660R0000 | | | | | | | | |
| L-7-50MH-9-M 7TAG054670R0011 | | | | | | | | |
| L-11-50MH-0-C 7TAG054670R0001 | 3 (76) | 12.1 (309) | | | | | | |
| L-11-50MH-0-D 7TAG054670R0002 | | | | | | | | |
| L-11-50MH-9-C 7TAG054670R0003 | | | | | | | | |
| L-11-50MH-9-D 7TAG054680R0011 | | | | | | | | |
| L-14-50MH-0-C 7TAG054680R0012 | 4 (102) | 14.9 (380) | | | | | | |
| L-14-50MH-0-D 7TAG054680R0013 | | | | | | | | |
| L-14-50MH-9-C 7TAG054670R0006 | | | | | | | | |
| L-14-50MH-9-D 7TAG054670R0007 | | | | | | | | |
| L-14-120MH-0-C 7TAG054670R0004 | 3.9 (98) | 15.0 (382) | 0.30 (7.6) | 0.28 (7) | 0.49 (12.6) | 0.07 (1.8) | 120 | 0.244 (6.2) |
| L-14-120MH-9-C 7TAG054670R0005 | | | | | | | | |

Note: Product must be installed in accordance with applicable national and local electrical codes.

* Not a recognized component.