

### Main

Range Compatibility	Lexium 28
Product or Component Type	Adaptation kit
Device short name	GBK
Accessory / separate part category	Adaptation accessory
Product Compatibility	BCH2
Accessory / separate part destination	For assembly motor and gearbox
Kit composition	An adaptor plate Screws and bolts for mounting
Gearbox external diameter	2.36 in (60 mm)

### Complementary

Motor flange size	2.36 in (60 mm)
Number of motor stacks	2 1
Length	0.91 in (23.1 mm)
Net Weight	0.53 lb(US) (0.24 kg)

### Ordering and shipping details


Category	18283-NEUGART GEARBOXES
Discount Schedule	PC53
GTIN	3606480745331
Returnability	No
Country of origin	DE

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.15 in (8.0 cm)
Package 1 Width	6.22 in (15.8 cm)
Package 1 Length	7.28 in (18.5 cm)
Package 1 Weight	8.18 oz (232.0 g)
Unit Type of Package 2	S04
Number of Units in Package 2	10
Package 2 Height	11.81 in (30 cm)
Package 2 Width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Package 2 Weight	7.06 lb(US) (3.202 kg)
Package 3 Height	28.94 in (73.5 cm)

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Dimensions

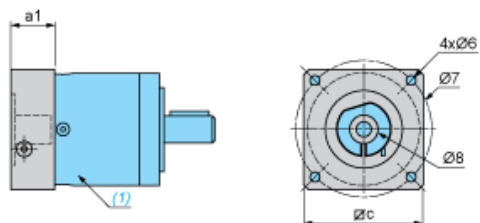

(1) Gearbox

Ø8 shaft end adaptor in case motor shaft diameter is smaller than gearbox input coupling diameter

Values in mm

a1	c	Ø6	Ø7	Ø8
23.1	60	M5	70	no bushing

Values in in.

a1	c	Ø6	Ø7	Ø8
0.91	2.36	M5	2.75	no bushing