



Main

Range of Product	Telemecanique Radio frequency identification XG
Product or Component Type	Electronic tag
RFID electronic tag name	XGHB
RFID Frequency	13.56 MHz
Design	Flat form 26 x 26 x 13
Memory capacity	256 B
Associated smart antenna	XGCS
[Sn] nominal sensing distance	1.57 In (40 mm) XGCS49 1.65 In (42 mm) XGCS49 + field expander XGFEC2525 2.17 In (55 mm) XGCS89 2.17 in (55 mm) XGCS85
Outer dimension	26 x 26 x 13 mm
Quantity per Set	Set of 1
Read time	12 + 0.825 x (number of 16-bit words) ms
Write time	20 + 11.8 x (number of 16-bit words) ms
IP Degree of Protection	IP68
Fixing Mode	By screws By clips

Complementary

Memory type	EEPROM
Memory operation	Read/write
Number of read cycles	Unlimited
Number of write cycles	100000 -13...158 °F (-25...70 °C) 2500000 86 °F (30 °C)
Maximum linear speed with "auto read/write function"	9.19 Ft/S (2.8 m/s) XGCS49 read a serial number) 2.62 Ft/S (0.8 m/s) XGCS49 read a word) 0.98 Ft/S (0.3 m/s) XGCS49 read or write 10 words) 13.78 Ft/S (4.2 m/s) XGCS89 read a serial number) 8.53 Ft/S (2.6 m/s) XGCS89 read a word) 1.64 Ft/S (0.5 m/s) XGCS89 read or write 10 words) 13.78 Ft/S (4.2 m/s) XGCS85 read a serial number) 8.53 Ft/S (2.6 m/s) XGCS85 read a word) 1.64 ft/s (0.5 m/s) XGCS85 read or write 10 words)
Data Retention Time	10 year(s)
Mounting Location	Possible on metal support
Material	PBT (polybutylene terephthalate)
Net Weight	0.06 lb(US) (0.025 kg)

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Environment

Standards	ISO 15693
Ambient air temperature for operation	-13...158 °F (-25...70 °C)
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Vibration resistance	2 mm 5...29.5 Hz)EN 60068-2-6 7 gn 29.5...150 Hz)EN 60068-2-6
Shock resistance	30 gn 11 ms EN 60068-2-27
IK degree of protection	IK02 EN 50102

Ordering and shipping details

Category	22491-SENS,IDENTIFICATION DEVICE (XGK)
Discount Schedule	DS2
GTIN	3389119021296
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.79 in (2.0 cm)
Package 1 Width	2.36 in (6.0 cm)
Package 1 Length	3.54 in (9.0 cm)
Package 1 Weight	0.74 oz (21.0 g)
Unit Type of Package 2	S01
Number of Units in Package 2	25
Package 2 Height	5.91 in (15.0 cm)
Package 2 Width	5.91 in (15.0 cm)
Package 2 Length	15.75 in (40.0 cm)
Package 2 Weight	26.88 oz (762.0 g)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions


Updatable Code Electronic Tags

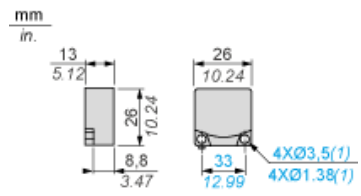

(1) For CHC type screws


Minimum Mounting Distances

Distance Between Tags



XGCS4901201 smart antenna (format 40)		XGCS8•• smart antennas (format 80)	
e1	e2	e1	e2
50	10	120	50

Minimum Mounting Distances in a Metal Structure

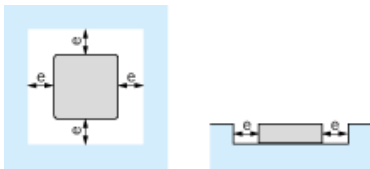

(e) ≥ 20 mm.