



RCBO, 10 kA, 1P+N, type A, 10 mA, B char., In: 10 A, Un AC: 230 V

Model	
product brand name	SENTRON
product designation	RCBO
design of the product	Instantaneous
General technical data	
number of poles	2
number of poles with protection	1
design of pole	1P+N
tripping characteristic class	B
mechanical service life (operating cycles) typical	10 000
overvoltage category	III
degree of pollution	2
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui) rated value	264 V
surge voltage resistance rated value	4 000 V
surge current resistance at (8/20) $\mu$ s	1 kA
Supply voltage	
supply voltage	
• at AC rated value	230/240 V
• for testing equipment minimum	100 V
operating frequency	50 Hz
supply voltage frequency rated value	50 Hz
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Switching capacity	
short-circuit current breaking capacity (Icn) according to EN 61009-1 rated value	10 kA
switching capacity current	
• according to EN 60898 rated value	10 kA
• according to IEC 60947-2 rated value	20 kA
rated residual switching capacity (I $\Delta$ m) according to IEC 61009-1	10 kA
energy limitation class	3
Dissipation	
power loss [W]	
• maximum	2.4 W
operational current	
• at 30 °C rated value	10 A
• at 40 °C rated value	9.5 A
• at 45 °C rated value	9.3 A

- at 50 °C rated value
- at 55 °C rated value
- at 60 °C rated value
- at 65 °C rated value
- at 70 °C rated value

9 A  
8.7 A  
8.5 A  
8.2 A  
8 A

#### Product details

product feature

- halogen-free
- silicon-free

Yes  
Yes

#### Connections

connectable conductor cross-section solid

- minimum
- maximum

0.75 mm<sup>2</sup>  
35 mm<sup>2</sup>

connectable conductor cross-section stranded

- minimum
- maximum

0.75 mm<sup>2</sup>  
35 mm<sup>2</sup>

connectable conductor cross-section finely stranded with core end processing

- minimum
- maximum

0.75 mm<sup>2</sup>  
25 mm<sup>2</sup>

tightening torque with screw-type terminals

- minimum
- maximum

2.5 N·m  
3 N·m

position of power supply cord

Either top or bottom

#### Mechanical Design

height

90 mm

width

36 mm

depth

77 mm

installation depth

70 mm

number of modular width units

2

mounting position

any

net weight

284 g

weight with packaging

284 g

#### Environmental conditions

influence of the surrounding temperature

Max. 95% humidity

ambient temperature during operation

- minimum
- maximum

-25 °C  
55 °C

ambient temperature during storage

- minimum
- maximum

-40 °C  
75 °C

number of test cycles for environmental testing according to IEC 60068-2-30

28

#### General Product Approval



[Confirmation](#)



[Miscellaneous](#)



EMC

Declaration of Conformity

Test Certificates

Marine / Shipping



[Special Test Certificate](#)

[Miscellaneous](#)



other

Railway

Dangerous Good

## Environment

### [Environmental Confirmations](#)

## Further information

**Siemens has decided to exit the Russian market (see here).**

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

**Siemens is working on the renewal of the current EAC certificates.**

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

**Information on the packaging**

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SU1154-6KK10>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5SU1154-6KK10>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SU1154-6KK10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SU1154-6KK10)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

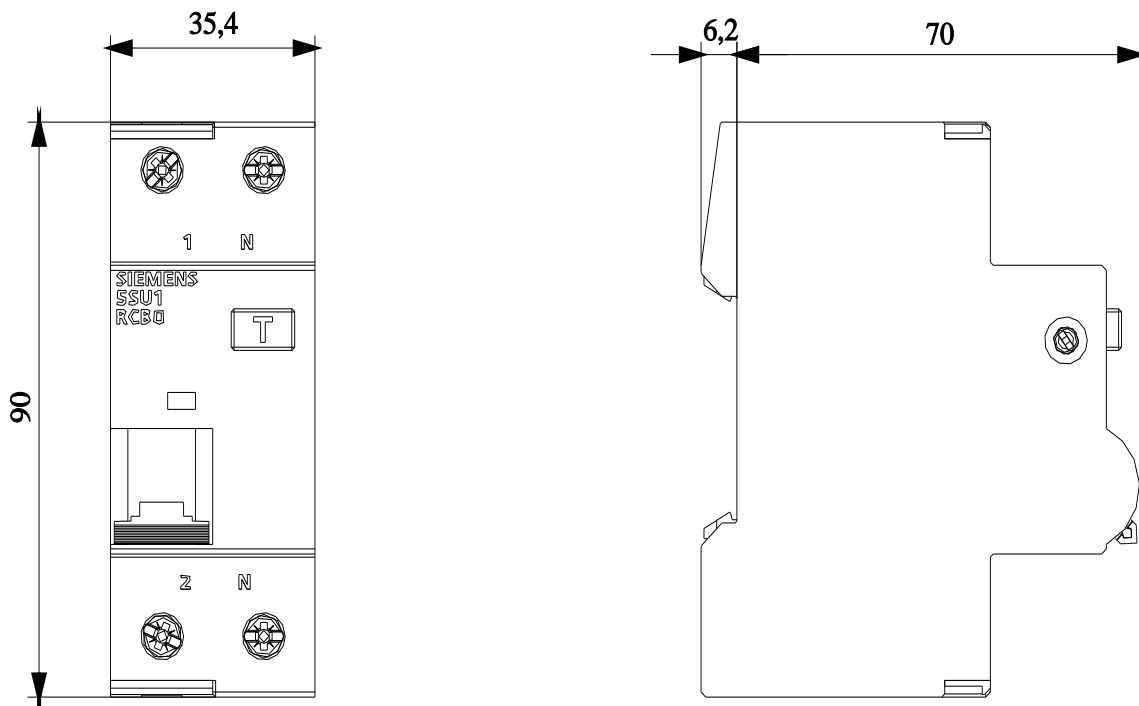

last modified:

3/1/2023 

